



# A fault-tolerant DC-DC buck converter with zero interruption time for autonomous vehicles

Preethi Kathribail Sharma <sup>a,\*</sup>, Vijayakumar Thippeswamy <sup>b</sup>

*a. Department of ECE, Global Academy of Technology, Bengaluru, India.*

*b. Department of ECE, SJB Institute of Technology, Bengaluru, India.*

\* Corresponding author: [ksharma.preethi@gmail.com](mailto:ksharma.preethi@gmail.com) (P.K. Sharma)

Received 3 November 2022; Received in revised form 1 August 2023; Accepted 9 October 2023

## Keywords

Aluminum electrolytic capacitor;  
Power Management Unit (PMU);  
Prognosis;  
Ripple voltage;  
Voltage regulator.

## Abstract

A high-end autonomous vehicle is expected to have at least a hundred different electronic subsystems. Each one of them takes power from the battery through a Power Management Unit (PMU). Having an efficient PMU is crucial and is expected to supply the required level of uninterrupted power. PMU consists of several buck converters that translate a higher voltage level to the required lower voltage levels. A PMU is more reliable if it consists of efficient and well-structured voltage converters. In this paper, a fault-tolerant buck converter is designed that outputs 3.3 V. A simple yet effective technique is proposed to design a fault-tolerant buck DC-DC converter by bypassing the faulty converter leg. The proposed system employs a signal-processing-based method for fault detection. The secondary converter is activated only upon the confirmed prognosis of a faulty primary converter. Ripple content in the output Aluminum Electrolytic Capacitor (AEC) voltage is monitored and used as a primary health indicator for the converter. An experimental setup is built and tested in the laboratory. Experimental results indicate a smooth transition from the primary converter to the secondary converter, demonstrating an uninterrupted power supply and the simplicity and effectiveness of the proposed solution.


## 1. Introduction

The current era is going through the most complicated mobility regeneration. Cities have evolved from cattle carriages to automobiles, railways, metros, and airways, then to different levels of driverless autonomous vehicles [1]. Autonomous vehicles are gaining a lot of importance in the transition of urban mobility. Autonomous vehicles, also termed self-driving vehicles are expected to possess the transportation capabilities of conventional human-driven vehicles with minimal or without human intervention. From the study conducted by Park [1], ensuring a safe environment digitally and physically for all users was found to be the highest priority element of autonomous vehicles [1]. Technology plays an utmost important role in achieving the same. In the successful development of an autonomous vehicle

vehicle, there are challenges in every aspect like the physical build, mechanical designs, subsystem placements, and electronics hardware and software development. Autonomous vehicles must sense and read surrounding conditions, analyze them, and self-navigate accordingly. These will require many customized electronics subsystems to enable their functionality. Major systems are Advanced Driver Assistance (ADA) system [2], parking assistance [3], blind spot monitoring [2], LIDAR, Night vision, Cruise control, Intelligent driving control computers, emergency responder, etc. [2]. These systems are crucial for the efficient operation of autonomous vehicles. All these systems will demand different power supply ratings to function. The required power levels for each subsystem are provided by the Power Management Unit (PMU) in the vehicle which is attached to its main battery. Figure 1 depicts the block diagram

## To cite this article:

P.K. Sharma, V. Thippeswamy "A fault-tolerant DC-DC buck converter with zero interruption time for autonomous vehicles", *Scientia Iranica* (2025) 32(15): 7283. <https://doi.org/10.24200/sci.2023.61387.7283>

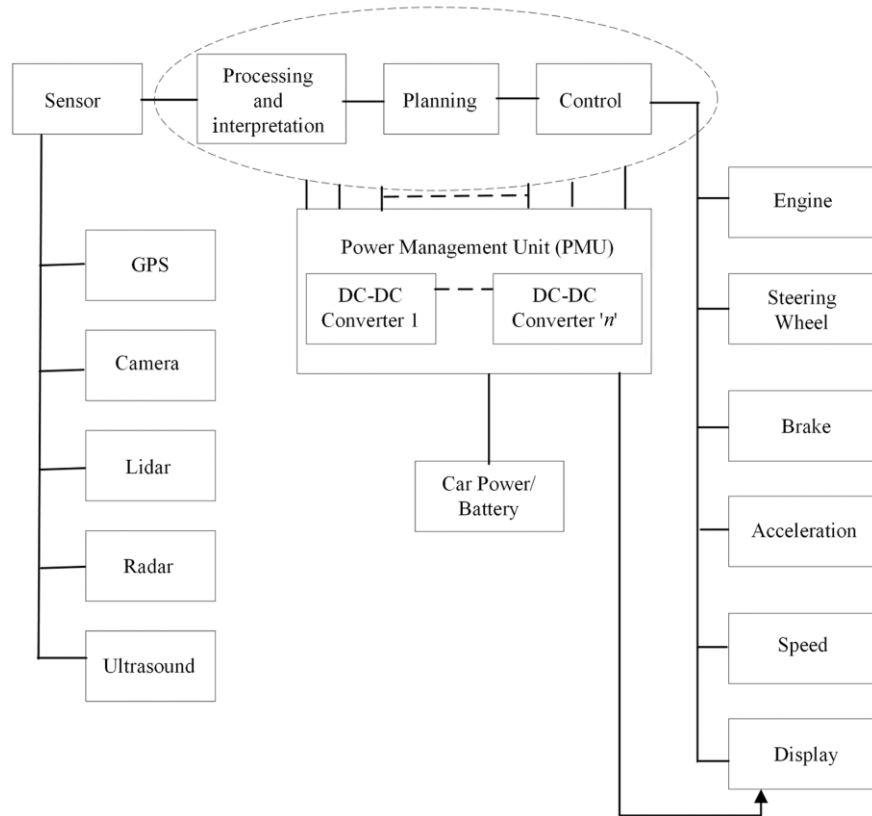

**Figure 1.** Block diagram of an autonomous vehicle with major electronic systems.

of an autonomous vehicle focusing on electronic systems. The electronics of the control unit are at the center of the control unit architecture [2]. Primary challenges in the design of electronics of the control unit are safety, reliability, and miniaturization. The PMU must supply relevant voltage to subsystems so that each subsystem functions reliably. Thus, having fault-tolerant DC-DC converters is one of the primary requirements in the safety-critical operations of autonomous vehicles. This paper intends to discuss fault-tolerant DC-DC converters in buck configuration for autonomous vehicles.

Power semiconductor switches and Aluminum Electrolytic Capacitors (AEC) are the two major components of buck converters [4]. Regrettably, 21% and 30% of breakdown or malfunctioning of power electronic converters are recorded due to a fault in the semiconductor switch and AEC respectively [5]. These components in the power supply may fail due to over current, over-voltage, temperature increase, overloading, short circuit, track breaking, ageing, etc. Also, in some cases, the cause of failure is unknown [4]. So, prognostically identifying the failure of power converters and providing fault-tolerant systems in critical applications is crucial.

A fault-tolerant DC-DC converter functions reliably despite the occurrence of fault [6]. Fault tolerance in a DC-DC converter is achieved in several stages like fault detection, fault diagnosis, and feasible fault-tolerance implementation. Fault detection and diagnosis give an effective indication of the fault and status of fault. However, the type of fault-tolerant strategy adopted is responsible for continuous power supply with admissible quality post fault detection. Approaches used for fault detection and diagnosis are majorly classified as data-driven, model-based, and knowledge-based methods [6]. Data-driven methods are also

termed signal processing methods. In this, either the time domain or frequency domain signature of identified signal parameters like DC bus current or capacitor voltage is processed to diagnose the fault [6-9]. In model based and knowledge-based techniques, the system behavior is modelled in prior and consistency between expected and measured values are analytically examined [6].

Fault-tolerant strategies are classified majorly as those which use additional hardware or those which are free of additional hardware [6-8]. Strategies based on additional hardware use bypassing of a faulty module, inclusion of additional discrete components, or inclusion of redundant legs. Strategies without additional hardware utilize phase shift adjustment or bypassing of faulty modules [6-8]. Hybrid methods of fault detection, diagnosis, and tolerance implementation are also demonstrated [7].

In this paper, a fault-tolerant buck converter for autonomous vehicle critical applications is proposed. Time domain signal processing is used for fault detection and diagnosis [5,9]. The inclusion of redundant legs with the help of additional discrete components followed by bypassing of the faulty module is used to achieve fault-tolerance [6-8].

The remainder of this paper is as follows. In Section 2 a short survey of the available literature is carried out. Section 3 explains the methodology of the proposed solution. Section 4 validates the proposed solution with experimental results followed by a discussion. Finally, in Section 5 overall work is concluded.

## 2. Literature survey

The initial solution to obtain a fault-tolerant power supply is by adding redundant systems. An  $N+1$  power converter is deployed in which  $N$  systems are required to run the system

effectively [10-12]. Necessary and redundant systems are connected in parallel and diode ORing is used [12]. In [13] FET ORing technique is proposed which reduces the voltage drop across the diode. Ref. [14] proposes a fault-tolerant boost converter by using two power semiconductor switches instead of one. In this, both switches share operating frequency equally and a control scheme is developed which adjusts the switching frequency to one switch if the fault is detected in the other. However, this solution leads to interruption in the output and works only for Boost converters. Refs. [15,16] deals with fault detection and tolerance by monitoring inductor current variation. An event counter is used to latch and activate the redundant switch. But this works only for open circuit faults during the ON state of the semiconductor switch.

In [17], a new cost-effective fault-tolerant scheme without redundant switch is proposed for Photovoltaic (PV) systems with Maximum Power Point Tracking (MPPT). In this Differential Power Processing (DPP) converter submodules coordinates are adjusted upon fault detection and boost converters PWM is controlled to have a fault-tolerant operation. This solution is complex and works only for open circuit faults. A simple fault clearance solution is proposed in [18]. Here, with the help of one diode and fuses faulty switch is cleared, so that the redundant switch can take over. In this solution, the short circuit is cleared instantly with the help of a switch and the open circuit fault is eliminated using a diode and a fuse. The proposed solution is supported by simulation and experimental results only on a boost converter. In this case fault tolerance is implemented with static redundancy. In [19] a new fault-tolerant scheme is proposed with an additional redundant switch. The fault is detected by measuring the voltage across the drain-source terminal ( $V_{ds}$ ) of the MOSFET switch. The reconfiguration of converter post fault is enabled using an affine-parametrization-based control design implemented on a microcontroller. The method proposed is evaluated using the Markov model and through experiments. The proposed solution involves 10ms of interruption in the output of buck converter.

Refs. [20,21] proposes a fault-tolerant strategy using a voltage doubler. In these, series resonant DC-DC converters are considered and upon one switch fault in the full bridge, the converter functions in the half-bridge mode. To compensate for the decreased voltage, a voltage doubler is used. Though this solution is simple it leads to efficiency compromises in constant uninterrupted output delivery. Ref. [22] proposed a model-based method to detect sensor faults in buck controllers. Here, fault detection and fault-tolerant control are based on an affine switched system. The residual signals are identified for buck converter using switched system modeling. Fault detection is achieved by comparing the residual signal with a predefined threshold. System reconfiguration is also modeled and demonstrated through simulations for open circuit faults, gain and noise variations. However, proposed solution is complex in modeling.

In [23], a fault-tolerant Dual Input Single Output (DISO) DC-DC converter is proposed. Inductor currents and input voltage are monitored to diagnose the fault. The proposed method demonstrates fault -tolerance towards power switch SC fault and input OC faults. Multiple redundant legs are employed and all legs are alternatively utilized under normal operation. Upon fault detection, healthy leg's duty cycles are

reconfigured to continue the operation effectively. Here, multiple active redundant legs lead to power losses and system overheads. Ref. [24] evaluated the effectiveness of employing Zero-Voltage-Transition (ZVT) soft switching circuits for fault tolerance implementation. Proposed method is implemented on boost topology and an efficiency of 94% is recorded in faulty conditions. In [25] a fault tolerance DC-DC converter using FPGA for Photovoltaic (PV) applications is presented. The proposed scheme is implemented on a boost converter by adding redundant switch, dedicated current sensors and replacing faulty semiconductor switch by monitoring inductor current shapes.

Ref. [26] conducted a survey in which parallel, hybrid, and cascade architectures of buck converters were designed for various input and output voltages, and their efficiencies for LiDAR applications of autonomous vehicles were compared. Ref. [26] utilized LM series buck converters from Texas Instruments in their design. Ref. [26] discussed a design with 15 V input, 3.3 V output, and 1 A load current for which the converter efficiencies were recorded at 92%, 97% and 91% for parallel, hybrid, and cascade architectures respectively.

### 3. Methodology

A DC-DC power converter in buck topology majorly has an inductor, a capacitor, a free-wheeling diode, and a semiconductor switch. Based on the control of the duty cycle of the semiconductor switch, the output voltage is maintained. Standard semiconductor ICs are available to design buck converters. The components in the buck converter get degraded leading to non-favorable operation. According to the literature, about 30% of power converter failures are due to AEC failures. From literature, capacitors are considered degraded when their capacitance reduces by 20% or Equivalent Series Resistance (ESR) increases to 2.8 times the initial value [27]. Ref. [5] demonstrates that, as the ESR of the capacitor increases, the ripple in the constant DC output voltage also increases.

In the proposed method, two buck converters are used with the Diode ORing technique [12]. Figure 2 depicts the block diagram of the proposed method. First buck converter i.e., primary regulator is initially ON and is giving a 3.3 V constant DC output voltage. The AC ripple across the output capacitor is continuously monitored. The peak voltage of the AC ripple is extracted and compared with a predefined threshold [5] for prognostic identification of Buck Converter 1 failure. When the AC ripple increases and reaches the threshold, the comparator switches the output. The comparator output is delayed using an RC network to avoid false triggering. After the prognosis of Buck Converter 1 failure, Turn-ON of Buck Converter 2 and Turn-OFF of Buck Converter 1 is initiated. Turn-ON signal is latched to Buck Converter 2 and Turn-OFF signal is latched to Buck Converter 1 respectively.

An additional delay is introduced to the Turn-OFF signal before latching to Buck Converter 1 which assures Turn-ON of Buck Converter 2 first and Turn-OFF Buck Converter 1 later. This aids in providing an uninterrupted power supply to the load without keeping the redundant buck converter always ON. By activating the redundant buck converter only on a need basis, the overall power dissipation is reduced. This

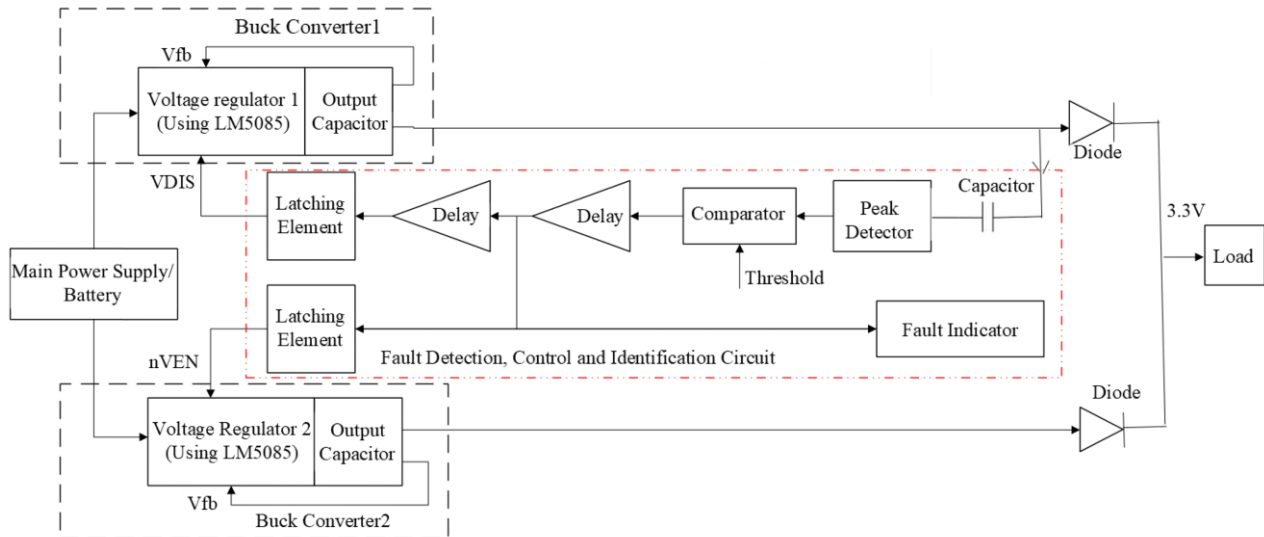


Figure 2. Block diagram of proposed solution.

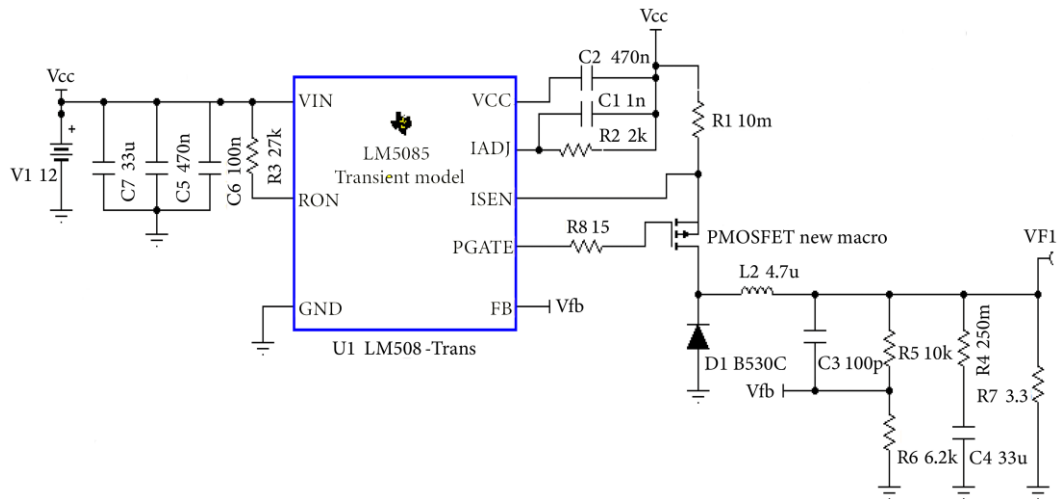


Figure 3. Schematic of the voltage regulator designed.

also increases the lifetime of the system and increases the reliability of PMU in an autonomous vehicle. A fault indication signal is provided for servicing purposes. Each block's basic functionality is described in the following section. Buck Converter 1 is considered as the primary regulator and Buck Converter 2 is considered to be a redundant regulator. Here, to each regulator, the feedback voltage ' $V_{fb}$ ' is given. Feedback ' $V_{fb}$ ', adjusts the duty cycle of the semiconductor switch to maintain the specific output voltage. ' $V_{fb}$ ' is extracted from the respective converter's output. A peak detector is designed using op-amp which extracts the peak value of the ripple in the DC output. This peak ripple value is compared against the predefined threshold. A threshold is set to a voltage that is equivalent to expected rise in the ripple when capacitor ESR increases to 2.8 times original value. If the ripple peak exceeds the threshold, the comparator switches the output. RC circuit-based delaying elements are designed. A latching circuit is designed using a transistor to latch the enable signal (nVEN) to Buck Converter 2. This latch maintains the enable signal even after Buck Converter 1 turns OFF and peak ripple output reduces. Turn-OFF of Buck Converter 1 is delayed slightly using an RC network so that, Buck Converter 2 turns

ON before turning OFF of Buck Converter 1. A transistor-based latching circuit is used to latch the disable signal Voltage Detecting and Indicating System (VDIS) to Buck Converter 1.

#### 4. Experimental results and discussion

To experimentally evaluate the proposed fault-tolerance technique simulations and experimental validations are carried out. TINA by Texas Instruments is used to design and simulate the proposed solution before conducting the experimental study. A voltage regulator in buck topology is designed using LM5085 buck controller [28]. This powerful voltage controller features a PFET gate driver and high voltage bias regulator that work across a wide 4.5 V to 75 V input range. The continuous ON-time regulation strategy eliminates the need for loop correction, simplifies circuit construction, and yields a very quick load transient response. Due to the inverse relationship between input voltage and on-time, operating frequency essentially stays constant even when the line and load are changing. The PFET architecture allows for a 100% duty cycle due to its low dropout voltage. Figure 3 depicts the schematic of the voltage regulator designed. Here, LM5085 buck voltage controller IC is used.

A Constant DC input voltage of 12 V with  $\pm 3$  V tolerance is assumed. A 33 $\mu$ F AEC is used. The AEC considered has 250 m $\Omega$  ESR. The schematic of the proposed fault-tolerant scheme is depicted in Figure 4.

The performance of the proposed fault-tolerant scheme when the system operates in steady state, while transitioning to a degraded state and when recovering from faulty

conditions is evaluated. An external resistor is added to increase the ESR of the capacitor. This emulates the degradation of the capacitor and thereby increases the ripple in DC output voltage indicating the ageing of the capacitor. Figure 5 depicts the simulation results of the proposed solution. The transient


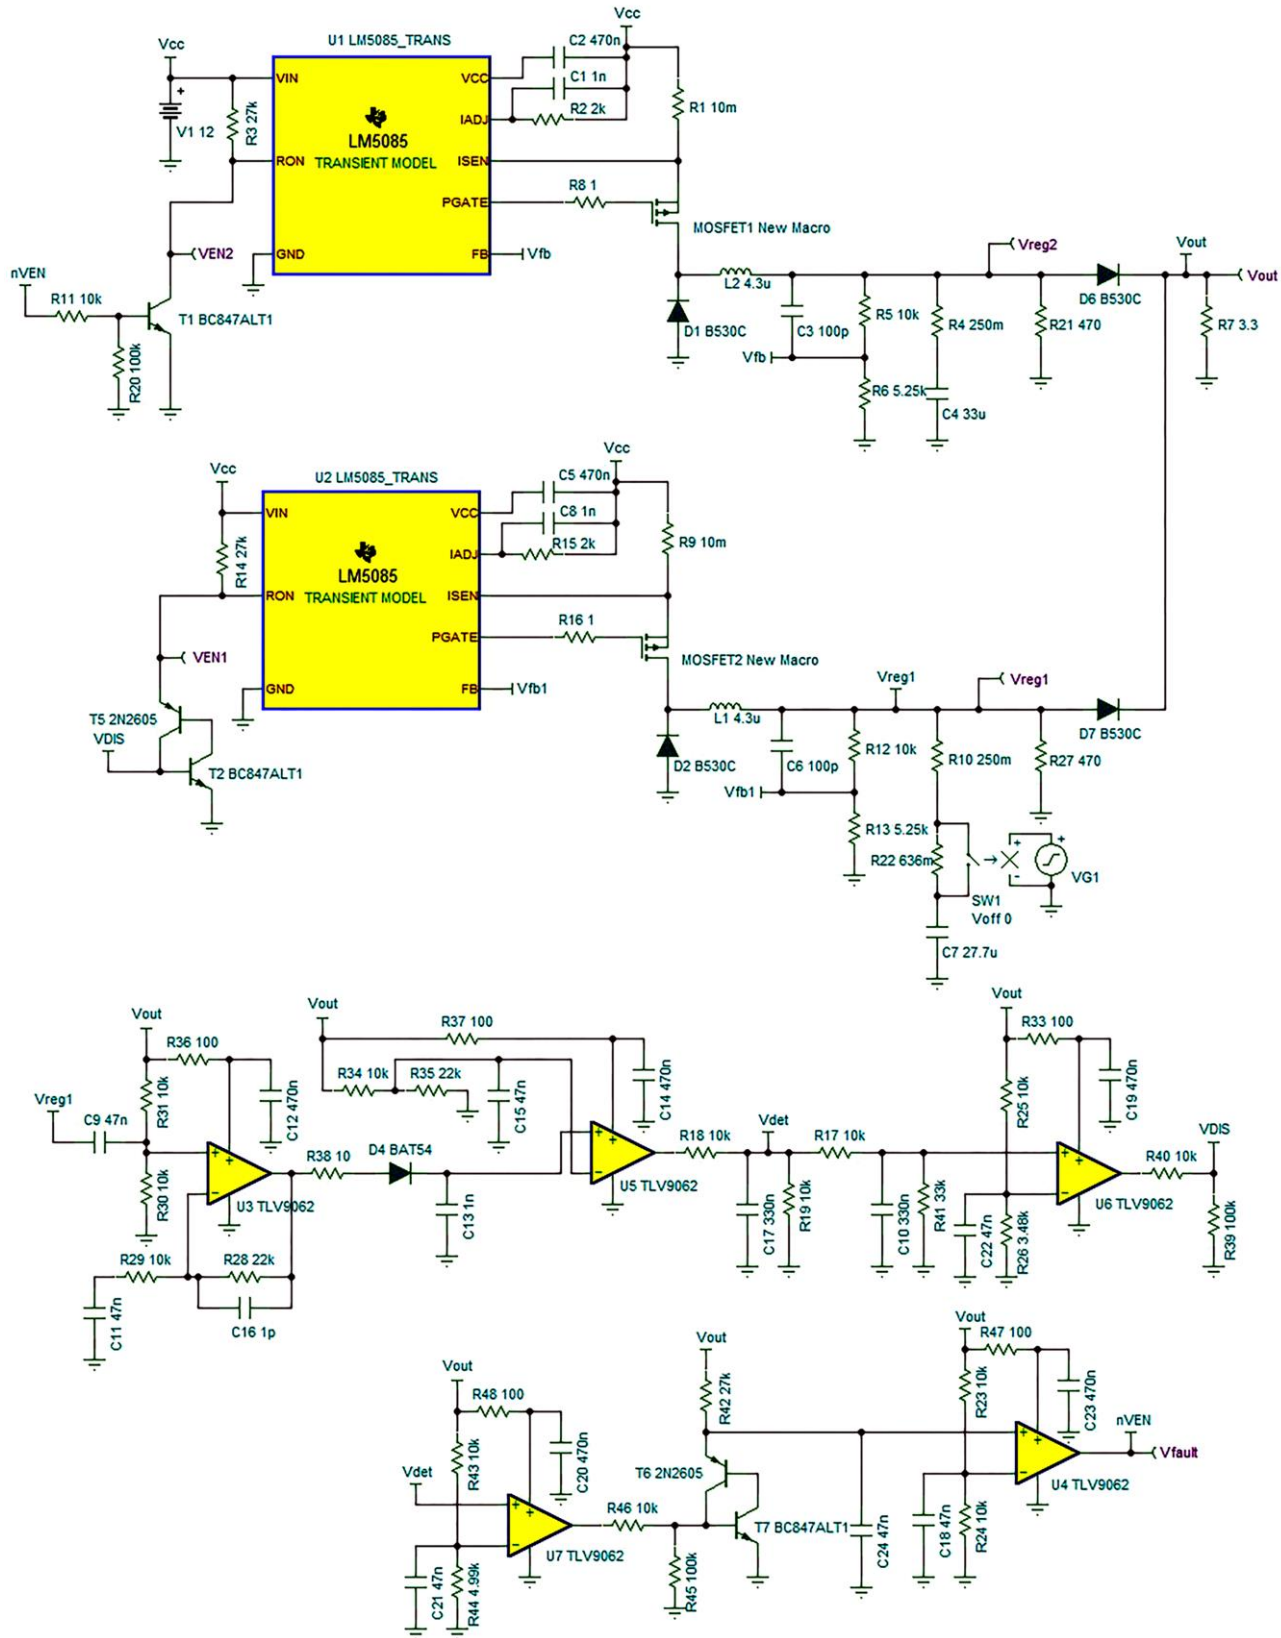


Figure 4. Schematic representation of proposed fault-tolerant scheme.

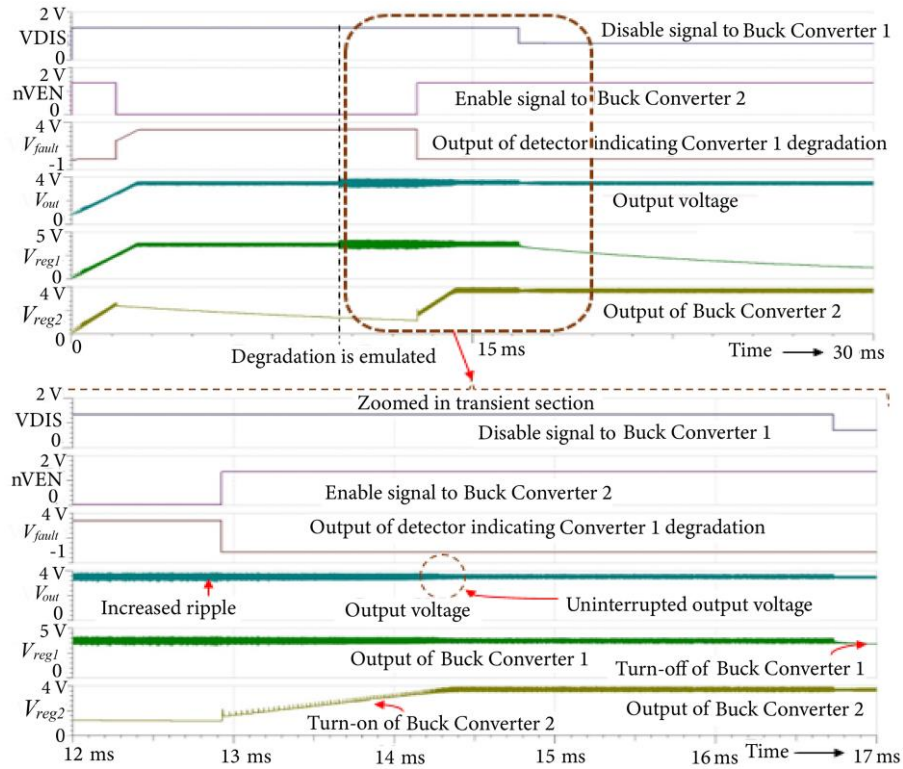

**Figure 5.** Simulation result of the proposed method. Here,  $V_{reg1}$  and  $V_{reg2}$  are the output voltages from Buck Converter 1 and Buck Converter 2 respectively.  $V_{fault}$  is the fault-indicating signal. nVEN and VDIS are enable signal given to Buck Converter 2 and disable signal given to Buck Converter 1 respectively.

section is zoomed in and presented for better understanding. Here, there is no interruption time observed when the system switches from Buck Converter 1 to Buck Converter 2. We can observe in Figure 5 as the ripple in Buck Converter 1 output increases due to degradation, enable signal to Buck Converter 2 is activated first and with a predefined delay disable signal to Buck Converter 2 gets activated. The signal to indicate the fault in Buck Converter 1 gets activated. From the simulation, it is observed that when Buck Converter 2 turns ON, the switching MOSFET of Buck Converter 2 adjusts its turn-on periods to attain the required output voltage gradually. The output voltage ripple reduces to normal after the Turn-ON of Buck Converter 2.

Table 1(a) depicts the major component specifications assumed for the design of the proposed fault-tolerant buck converter. Table 1(b) lists the major components used in the design and experimental setup of the proposed system.

Figure 6 exhibits the prototype of the proposed fault-tolerant buck converter solution. Figure 7 displays the experimental setup used to validate the proposed solution. Here, a DC power supply is used to input 12 V of DC into the circuit. A digital oscilloscope is used to capture the signals. An external resistor is appended to increase the ESR of the AEC. Figure 8 depicts the outputs of the proposed systems for probable conditions. Figure 8(a) displays the output when the system turns ON and is functioning without any degradation. We can see from Figure 8(a) that upon turning ON, both Buck Converter 1 and Buck Converter 2 turn ON. After initialization, Buck Converter 2 turns OFF and Buck Converter 1 continues to perform steadily and gives a constant output voltage. Figure 8(b) displays the experimental result of the proposed system when a fault occurs during steady-state operating conditions. The figure also displays the zoomed

**Table 1(a).** Specifications of the proposed system.

| Parameter | Description    | Value  |
|-----------|----------------|--------|
| $V_{cc}$  | Input voltage  | 12±3 V |
| $V_{out}$ | Output voltage | 3.3 V  |
| $I_{out}$ | Output current | 1 A    |

**Table 1(b).** Components used in the proposed system.

| Component                | Description                                             |
|--------------------------|---------------------------------------------------------|
| LM5085                   | Buck switching controller IC                            |
| CSD4502Q3A               | Power MOSFET                                            |
| B530C                    | Diode                                                   |
| $L_1, L_2$               | 4.3uH inductor                                          |
| $C_1, C_2$               | 33uF output AEC                                         |
| $R_L$                    | 3.3 $\Omega$ load resistor                              |
| LST67K-J1L2-1-Z          | LED indicating degradation                              |
| BC847 (NPN transistors)  | Used in fault detection, control and indication circuit |
| 2N2605 (PNP transistors) |                                                         |
| TLV9062 (Op-amp)         |                                                         |

version of the output depicting the transition from Buck Converter 1 to Buck Converter 2. From the output waveform, we can observe the increase in AC ripple in the 3.3 V DC output as the capacitor ESR is increased. This increased ripple is monitored and as it increases beyond the defined threshold, we can observe a shift in the output signal of Buck Converter 2. Figure 8(b) also depicts the signal indicating the degradation of Buck Converter 1 and gradual turn OFF of Buck Converter 1. Here, initially, the system is tested for

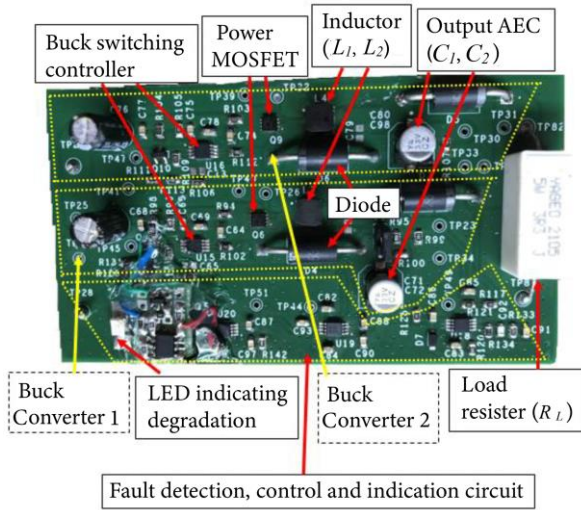


Figure 6. Prototype of proposed solution.

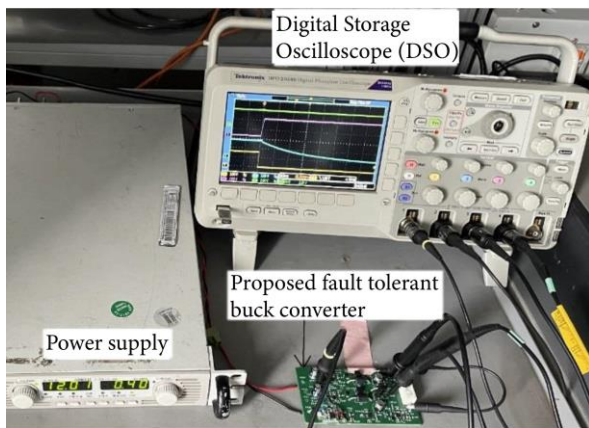


Figure 7. Experimental set-up of proposed system.

original capacitor parameters. Later, the capacitor ESR is updated by increasing the ESR emulating the degradation. Then the output changed as expected to the degraded version and fault detection and fault-tolerance by activating Buck Converter 2 is achieved. From Figure 8(b), we can observe that there is no interruption while switching from Buck Converter 1 to Buck Converter 2.

Figure 8(c) displays output waveforms during the initial setup when Buck Converter 1 is already degraded or faulty. In Figure 8(c) we can observe that upon Turn-ON both Buck Converter 1 and Buck Converter 2 are activated. However, as Buck Converter 2 begins to turn OFF the output ripple is monitored and immediately Buck Converter 2 turns ON and Buck Converter 1 turns OFF. We also observe that there is no interruption in the output voltage in any discussed conditions.

In this proposed solution care is taken to avoid false triggering unlike in available fault-tolerant techniques using signal processing-based fault detection. Table 2 lists a comparative analysis of the proposed system with available literature. From Table 2, we can observe that most available systems have either a redundant system always active or there is interruption time while switching from primary to a redundant system. The proposed system overcomes both of these issues. The proposed solution also has low design complexity with minimal additional components.

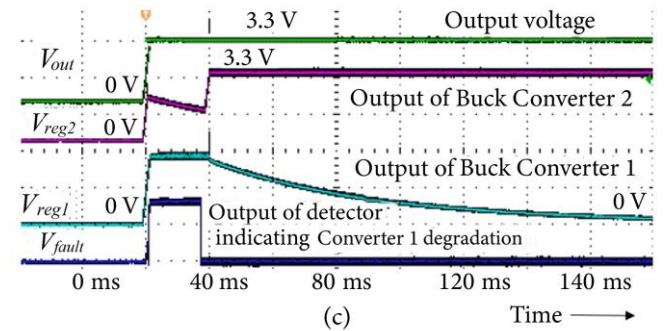
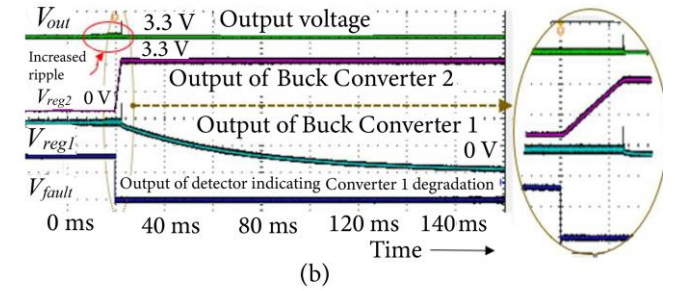
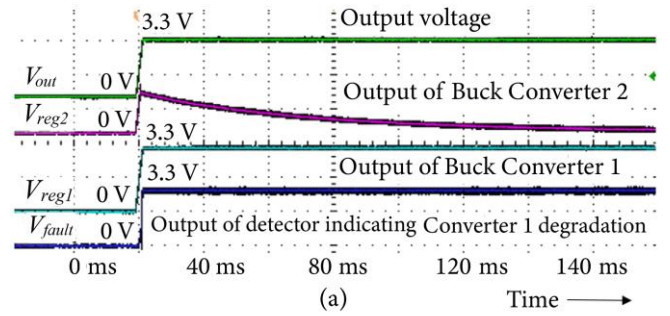


Figure 8 (a) Output of the proposed system during Turn-ON and upon healthy operation; (b) experimental results of proposed fault-tolerant buck converter upon fault occurrence during operation; and (c) output of the proposed system upon Turn-ON while regulator1 is degraded.

To summarize, the proposed solution provides a fault-tolerant buck power converter with zero interruption time. The proposed solution of fault-tolerance is conveniently expandable to MOSFET or Diode degradation-induced failures. It is also applicable to other voltage converter topologies like boost, and buck-boost converters.

## 5. Conclusion

In this paper, a novel fault-tolerant buck converter system for autonomous vehicle Power Management Unit (PMU) is discussed. The proposed system gives constant uninterrupted DC power by prognostically identifying primary buck converter failure and thereby activating secondary buck converter using signal processing technique. Here, false alarms are avoided by careful design. Also, a redundant secondary system is activated only after identifying primary converter failure. This reduces power wastage in the system and enhances the overall lifetime of the system. The system is simple in design, cost-effective, uses less number additional components, and is highly efficient. These qualities make the system suitable for critical applications of autonomous vehicles. The proposed system is tested with simulations and experimentally. The results demonstrate the proclaimed properties of the system. The proposed system of

**Table 2.** Comparative analysis of proposed system with existing systems.

| Ref. number            | Converter topology considered   | Faults detected                    | Diagnostic variable                    | Reconfiguration strategy                            | Is redundant system/element always active? | Complexity/cost | Is output uninterrupted?                   | Interruption time                    |
|------------------------|---------------------------------|------------------------------------|----------------------------------------|-----------------------------------------------------|--------------------------------------------|-----------------|--------------------------------------------|--------------------------------------|
| [14]                   | Boost                           | OC/SC                              | Output voltage                         | Bypass the faulty switch and Phase shift adjustment | Yes                                        | Low             | No                                         | 15 ms                                |
| [15]                   | Buck, Boost, Buck-boost         | OC                                 | Inductor current                       | Inclusion of redundant component                    | No                                         | Low             | Yes, for buck & no, for boost & Buck-boost | 3 us                                 |
| [16]                   | Boost                           | OC                                 | Inductor current                       | Inclusion of redundant component                    | No                                         | Low             | No                                         | 93 us for $D=0.2$ , 4 us for $D=0.8$ |
| [17]                   | Boost, Buck-boost               | OC                                 | Inductor current                       | Bypass the faulty switch and Phase shift adjustment | Yes                                        | Medium          | No                                         | Fast                                 |
| [18]                   | Boost                           | OC/SC                              | Inductor current                       | Inclusion of additional discrete components         | Yes                                        | Low             | No                                         | $\ll 1T_{sw}$                        |
| [19]                   | Buck                            | SC                                 | Voltage across switch $V_{ds}$         | Inclusion of additional discrete components         | No                                         | Medium          | No                                         | 10 ms                                |
| [20,21]                | Series resonant DC-DC converter | OC/SC                              | Inductor current/capacitor voltage     | Inclusion of additional discrete components         | Yes                                        | Medium          | No                                         | 45 ms                                |
| [22]                   | Buck                            | OC/Gain variation and excess noise | Inductor current/capacitor voltage     | Inclusion of additional discrete components         | Yes                                        | High            | No                                         | 10 ms                                |
| [23]                   | Buck, Boost, Buck-boost         | OC/SC (partial)                    | Inductor current/input voltage         | Inclusion of Redundant Legs                         | Yes                                        | Low             | No                                         | NA                                   |
| [24]                   | Boost                           | OC/SC                              | Voltage $V_{gs}$ across switch         | Inclusion of additional discrete components         | Yes                                        | Medium          | No                                         | $\sim 5$ ms                          |
| [25]                   | Boost                           | OC/SC                              | Inductor current                       | Inclusion of additional discrete components         | No                                         | High            | No                                         | $< 1T_{sw}$                          |
| <b>Proposed system</b> | <b>Buck</b>                     | <b>OC/SC</b>                       | <b>Ripple in the capacitor voltage</b> | <b>Inclusion of redundant leg</b>                   | <b>No</b>                                  | <b>Low</b>      | <b>Yes</b>                                 | <b>Uninterrupted</b>                 |
|                        | OC-open circuit                 |                                    |                                        | NA-Not available                                    |                                            |                 |                                            |                                      |
|                        | SC-short circuit                |                                    |                                        | $T_{sw}-1/\text{switching frequency}$               |                                            |                 |                                            |                                      |

fault detection and tolerance implementation are tested on a buck converter. However, this is scalable to other topologies of power converters like boost, and buck-boost efficiently. The fault detection and fault-tolerance implementation method introduced could be explored and adapted for the failure of buck converters due to MOSFET or Diode degradation.

#### Acknowledgement

We would like to thank the Principal, Head of the Department, Department of ECE, SJBIT, Bengaluru for the opportunity to carry out this work. We also appreciate the timely advices of Mr. Kiran Y.M (Robert Bosch Engineering Services, India), Mrs. Amulya N.V (Renesas Electronics

Europe GmbH) and Mrs. Rashmi R. (Continental Automotive Components Pvt Ltd).

#### Funding

This research did not receive any specific grant from funding agencies in the public, commercial, or not-for profit sectors.

#### Conflicts of interest

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

#### Authors contribution statement

**First author:** Conceptualization; Data curation; Formal analysis; Investigation; Methodology; Experimental design and analysis;

Writing-original draft; Review & Editing

**Second author:** Supervision; Project administration; Resources; Methodology; Writing-review & editing.

## References

1. Park, C. "The prioritized design elements for urban regeneration in the era of autonomous vehicles", *Journal of Asian Architecture and Building Engineering*, **22**(1), pp. 339-353 (2023). <https://doi.org/10.1080/13467581.2022.2046589>
2. "Power management for advanced driver assistance systems, design guide", Maxim Integrated.
3. Rokonuzzaman, M., Mohajer, N., and Nahavandi, S. "Effective adoption of vehicle models for autonomous vehicle path tracking: A switched MPC approach", *Vehicle System Dynamics*, **61**(5), pp. 1236-1259 (2023). <https://doi.org/10.1080/00423114.2022.2071300>
4. Kiran, Y.M., Preethi Sharma K., and Nandihalli, R. "Overview of fault diagnosis and detection methods used in switched mode power supplies", *2016 2nd International Conference on Applied and Theoretical Computing and Communication Technology (iCATecT)*, Bangalore, pp. 708-712 (2016). <https://doi.org/10.1109/ICATCCT.2016.7912091>
5. Preethi Sharma K., and Vijayakumar, T "Study of capacitor & diode aging effects on output ripple in voltage regulators and prognostic detection of failure", *Intl Journal of Electronics and Telecommunications*, **68**(2), pp. 281-286 (2022). <https://doi.org/10.24425/ijet.2022.139879>
6. Preethi Sharma K., and Vijayakumar, T "Review of fault tolerant power converters deployed in critical applications", *Second International Conference on Electronics and Sustainable Communication Systems (ICESC)*, pp. 306-311 (2021). <https://doi.org/10.1109/ICESC51422.2021.9532671>
7. Kiran Kumar, G., and Elangovan, D. "Review on fault-diagnosis and fault-tolerance for DC-DC converters", *IET Power Electronics*, **13**(1), pp. 1-13 (2020). <https://doi.org/10.1049/iet-pel.2019.0672>
8. Bento, F., Marques Cardoso, A.J. "A comprehensive survey on fault diagnosis and fault tolerance of DC-DC converters", *Chinese Journal of Electrical Engineering*, **4**(3), pp. 1-12 (2018). <https://doi.org/10.23919/CJEE.2018.8471284>
9. Preethi Sharma K., and Vijayakumar, T "Analysis of capacitor parameters signature variation with ageing in critical healthcare power management systems", *2019 International Conference on Smart Systems and Inventive Technology (ICSSIT)*, Tirunelveli, India, pp. 1036-1040 (2019). <https://doi.org/10.1109/ICSSIT46314.2019.8987938>
10. Zhang, Y. and Jiang, J. "Bibliographical review on reconfigurable fault tolerant control systems", *Annual Reviews in Control*, **32**(2), pp. 229-252 (2008). <https://doi.org/10.1016/j.arcontrol.2008.03.008>
11. Nesgaard, C. and Andersen, M.E.A., *Fault Tolerant Power Systems*, Technical University of Denmark, PhD Thesis (2004). <https://doi.org/10.1109/CIPE.1995.535945>
12. "A Beginner's guide" to Fault Tolerant Power Supplies.
13. "A FET ORing circuit for fault tolerant power systems".
14. Kumar, S. and Rajpurohit, B.S. "A novel fault tolerant control scheme for power converter", *2020 IEEE International Power and Renewable Energy Conference*, pp. 1-5 (2020). <https://doi.org/10.1109/IPRECON49514.2020.9315247>
15. Jagtap, S. and More, D. "Switch open-circuit fault diagnosis and fault-tolerant control strategy for DC-DC converters", *2020 International Conference on Communication and Signal Processing (ICCSP)*, pp. 1399-1405 (2020). <https://doi.org/10.1109/ICCSP48568.2020.9182063>
16. Jagtap, S. and More, D. "Switch open-circuit fault diagnosis and fault-tolerant control for boost DC-DC converter", *Procedia Computer Science*, **171**, pp 934-940 (2020). <https://doi.org/10.1016/j.procs.2020.04.101>
17. Xu, D., and Chen, H. "Fault-tolerant strategy without redundant switches for PV systems based on differential power processing converters", *Solar Energy*, **230**, pp. 365-375 (2021). <https://doi.org/10.1016/j.solener.2021.08.082>
18. Rahimi, T. Khoun Jahan, H., Abadifard, A., et. al. "Fault-tolerant performance enhancement of DC-DC converters with high-speed fault clearing-unit based redundant power switch configurations", *2021 IEEE Electrical Power and Energy Conference (EPEC)*, pp. 492-497 (2021). <https://doi.org/10.1109/EPEC52095.2021.9621756>
19. Long Soon, J., Lu, D.D-C., Peng, J.C-H., et al. "Reconfigurable non-isolated DC-DC converter with fault-tolerant capability", *IEEE Transactions on Power Electronics*, **35**(9), pp. 8934-8943 (2020). <https://doi.org/10.1109/TPEL.2020.2971837>
20. Costa, L., Buticchi, G., and Liserre, M. "A fault-tolerant series resonant DC-DC converter", *IEEE Trans. Power Electron.*, **32**(2), pp. 900-905 (2017). <https://doi.org/10.1109/TPEL.2016.2585668>
21. Costa, L.F., Buticchi, G., and Liserre, M. "A family of series resonant DC-DC converter with fault-tolerance capability", *IEEE Applied Power Electronics Conference and Exposition (APEC)*, pp. 3378-3384 (2017). <https://doi.org/10.1109/APEC.2017.7931181>

22. Li, J., Pan, K., Su, Q., et al. "Sensor fault detection and fault-tolerant control for buck converter via affine switched systems", *IEEE Access*, **7**, pp. 47124-47134 (2019).  
<https://doi.org/10.1109/ACCESS.2019.2909124>
23. Dhananjaya, M., Jagabar, S.M., Padmanaban, S., et al. "A new configuration of switch and source fault-tolerant dual-input single-output DC-DC converter", *IEEE 4th International Conference on Computing, Power and Communication Technologies (GUCON)*, pp. 1-6 (2021).  
<https://doi.org/10.1109/GUCON50781.2021.9573998>
24. Faraji, R., Ding, L., Rahimi, T., et al. "Application of soft-switching cell with inherent redundancy properties for enhancing the reliability of boost-based DC-DC converters", *IEEE Transactions on Power Electronics*, **36**(11), pp. 12342-12354 (2021).  
<https://doi.org/10.1109/TPEL.2021.3081722>
25. Jamshidpour, E., Poure, P., and Saadate, S. "Photovoltaic systems reliability improvement by real-time FPGA-based switch failure diagnosis and fault-tolerant DC-DC converter", *IEEE Transactions on Industrial Electronics*, **62**(11) pp. 7247-7255 (2015).  
<https://doi.org/10.1109/TIE.2015.2421880>
26. Figueiredo, R. Monteiro, V., Afonso, J.A. et al. "Efficiency comparison of different DC-DC converter architectures for a power supply of a LiDAR system", *Sustainable Energy for Smart Cities. SESC 2020. Lecture Notes of the Institute for Computer Sciences, Social Informatics and Telecommunications Engineering*, **375**, pp. 97-110 (2021).  
[https://doi.org/10.1007/978-3-030-73585-2\\_7](https://doi.org/10.1007/978-3-030-73585-2_7)
27. Kulkarni, C., Biswas, G., Koutsoukos, X., et al. "Experimental studies of ageing in electrolytic capacitors", *Annual Conference of the PHM Society*, **2**(1), (2010).  
<https://doi.org/10.36001/phmconf.2010.v2i1.1727>
28. LM5085/-Q1 75-V Constant On-time PFET Buck Switching Controller Datasheet.

## Biographies

**Preethi Kathribail Sharma** received BSc in Electronics and Communication Engineering from the National Institute of Engineering, Mysore. She completed M.Tech in Digital Electronics and Communication Systems from PESIT, Bengaluru. She has 4 years of teaching, 5 years of research and 1-year industrial experience. Her research interests include fault tolerant DC-DC converter design, fault tolerant critical power supply design. She is currently working as an assistant professor in the department of electronics and communication engineering, global academy of technology, Bengaluru.

**Vijayakumar Thippeswamy** working as a Professor in the Department of Electronics and Communication Engineering at SJB Institute of Technology, Bengaluru. He obtained his BE in Electronics, ME in Digital Communication from Bangalore University in 1993 and 2000 respectively. He obtained his Doctoral degree in VLSI and Image Processing from Kuvempu University, in 2015. During his PhD work, he carried out research in the area of medical image processing and compression techniques. He has 7 years industry and 23 years teaching experience. He has authored/co-authored more than 40 research papers in peer-reviewed, Scopus and Web of Science journals and conferences. He is a member of institute of engineers and ISTE. His areas of interest are communication, VLSI and image processing. Currently, he is supervising one candidate leading to their PhD degree and three students got PhD degree under his guidance. He worked has BOE/BOS for VTU and other universities.