



Percentile bootstrap control chart for monitoring process variability under non-normal processes

N. Saeed^a, S. Kamal^b, and M. Aslam^{c,*}

a. *College of Statistical and Actuarial Sciences, University of the Punjab Lahore-54000, Lahore, Pakistan.*

b. *Department of Statistics, GC University Faisalabad, Faisalabad, Pakistan.*

c. *Department of Statistic, Faculty of Science, King Abdulaziz University, Jeddah 21551, Saudi Arabia.*

Received 29 April 2021; received in revised form 28 June 2021; accepted 6 September 2021

KEYWORDS

Bootstrap;
 Control chart;
 MAD;
 Non-normal;
 Robust.

Abstract. In the recent years, another approach named as the bootstrap method is getting popular in statistical process control specifically when the underlying distribution of the process is unknown. The bootstrap estimators are getting popularity in statistical process control due to their remarkable properties for non-normal distribution. In this paper the bootstrap control chart is developed for monitoring process variability and robustness is discussed through simulation studies. It appears that the proposed control chart for monitoring process variability based on the bootstrap method is performing better to detect out-of-control signal in a case when data follow skewed distributions. Therefore, the proposed chart is more recommendable for industrial practitioners.

© 2024 Sharif University of Technology. All rights reserved.

1. Introduction

In Statistical Process Control (SPC), the control chart is mostly used to detect the assignable causes of variation. The control chart for variation (*S*-chart), introduced by Shewhart, is widely accepted as a standard tool for monitoring univariate, independent and “nearly” normal processes (cf., [1]) but this is not well developed beyond these types of data (cf., [2]). The chart based on estimator is generally used to control the

variability of the process. The traditional Shewhart-*S* chart is constructed on the assumption that the process generator follows normal distribution but under non-normal processes, this chart may poorly perform (cf., [3]). In SPC, the scale estimators play a vital role to monitor the process variability. Although true process standard deviation σ can be estimated through sample standard deviation S but unfortunately S is considered non-robust due to its slight departure from normality (cf., [4]). Hence for non-normal processes, the robust scale estimators are may perform well.

According to Mosteller and Tukey [5], a robust estimator has two properties; first is the resistance which means that the estimator does not cause a large

*. *Corresponding author. Tel.: 00966593329841*
E-mail addresses: nadia.stat@pu.edu.pk (N. Saeed);
kamal.shahid@hotmail.com (S. Kamal);
aslam_ravian@hotmail.com (M. Aslam)

To cite this article:

N. Saeed, S. Kamal, and M. Aslam “Percentile bootstrap control chart for monitoring process variability under non-normal processes”, *Scientia Iranica* (2024), **31**(15), pp. 1282-1292

<https://doi.org/10.24200/sci.2021.58118.5573>

change by change in the size of sample data, and second is the efficiency which means that it should be efficient in a variety of situations and free from distributional assumptions. Many scale estimators are available in the literature, one of them is Median Absolute Deviation (MAD) which was first introduced by Hampel [6]. The MAD estimator is popular due to its 50% breakdown point which shows its resistance against outliers. Hence many researchers recommended MAD as a robust scale estimator for normal and non-normal processes (cf. [7,8]). Moreover, a class of robust scale estimators is also proposed by Rousseeuw and Croux [9]. Most of them are based on the median.

In the recent years, another approach named as the bootstrap method is getting popular in SPC specifically when the underlying distribution of the process is unknown. The method was first developed by Efron [10]. The importance of bootstrap mean estimator for the construction of control chart is already discussed by Liu and Tang [2]. Based on the idea given by Liu and Tang [2], a control chart using a Moving Block Bootstrap (MBB) method on dependent multivariate data was constructed by Liu et al. [11]. The bootstrap method was also applied to construct the control chart for Weibull percentiles by Nichols and Padgett [12]. After that Chatterjee and Qiu [13] developed CUSUM control charts using the bootstrap method. Wararit and Somchit [14] used a bootstrap approach for the construction of confidence intervals of difference between two process capability indices under half logistic distribution. Saeed and Kamal [15] proposed a bootstrap variability chart under the normal process. After that Wang and Hryniewicz [16] proposed a non-parametric Shewhart control chart based on fuzzy data using bootstrap method. Recently Hila et al. [17] extended the work by applying bootstrap methods in Exponentially Weighted Moving Average (EWMA) chart. The bootstrap methods are not only popular in variable control charts but these methods are also used for the construction of attribute control limits such as Zhao and Driscoll [18] used the bootstrap method for constructing control limits of c -chart. On the basis of average run lengths and false alarm rates, the bootstrap adjusted control limits showed better performance. Kashif et al. [19] proposed bootstrap confidence intervals of modified process capability index under lifetime distributions. The distribution free charts also getting popularity in the recent years. Marchant et al. [20] proposed robust multivariate control charts under generalized Birnbaum-Saunders distributions. In the next year, a comparative study was made by Ikpotokin and Siloko [21] for multivariate Exponentially Weighted Moving Average (EWMA) charts on the basis of bootstrap methods for the early detection of shifts. In the same year, Mutlu and Alakent [22] used reweighted robust standard deviation estimators

to modify Shewhart S -chart. The MAD, as robust scale estimator was also suggested by Koukouvinos and Lappa [23]. Based on the simulations, the performance of MAD estimator was considered better as compared to standard deviation. The performance of confidence intervals under different sampling schemes was addressed by Mahdizadeh and Zamanzade [24,25]. Ajadi et al. [26] presented a review of dispersion control charts. Ugaz et al. [27] studied the adoptive EWMA chart for variance.

In recent years, the bootstrap control charts are considered best using Bayes estimator in high quality processes for monitoring the fraction nonconforming (cf., [28]). The performance of different types of robust estimators is also addressed by Moheghi et al. [29], Dizicheh et al. [30], Ahmed et al. [31], Raza et al. [32], Ugaz et al. [27] and Abu-Shawiesh et al. [33]. Under remarkable properties of bootstrap methods, the bootstrap- S chart is proposed for non-normal processes and its robustness is also being discussed in this research.

2. S and MAD charts for variability

2.1. The Shewhart- S control limits

It is customary to know that the sample standard deviation (S) is a biased estimator of the population standard deviation and under the normal process, the S estimator is considered as an unbiased estimator of $c_4\sigma$, where $c_4 \cong \frac{4(n-1)}{4n-3}$ is a bias adjusting constant and its value depends upon subgroup size n . Furthermore the standard deviation of s estimator is $\sigma\sqrt{1-c_4^2}$.

The three-sigma control limits for Shewhart- S chart with σ known are:

$$UCL = c_4\sigma + 3\sigma\sqrt{1-c_4^2},$$

$$CL = c_4\sigma,$$

$$LCL = c_4\sigma - 3\sigma\sqrt{1-c_4^2},$$

where Upper Control Limit (UCL) and Lower Control Limit (LCL) are the parameters of the control chart while Control Line (CL) is the central line of the control chart. It is customary to define the two constants:

$$B_5 = c_4 - 3\sqrt{1-c_4^2},$$

$$B_6 = c_4 + 3\sqrt{1-c_4^2}.$$

Consequently, the control limits become:

$$UCL = B_6\sigma, \quad (1)$$

$$CL = c_4\sigma, \quad (2)$$

$$LCL = B_3\sigma. \tag{3}$$

In situation when σ is not known, it must be estimated. Suppose that m preliminary samples are available, each of size n and let S_i be the standard deviation of the i th sample. The average of m standard deviations is \bar{S} . Since $\frac{\bar{S}}{c_4}$ is an unbiased estimator of process standard deviation σ , therefore the control limits for Shewhart- S chart would be:

$$UCL = \bar{S} + 3\frac{\bar{S}}{c_4}\sqrt{1 - c_4^2},$$

$$CL = \bar{S},$$

$$LCL = \bar{S} - 3\frac{\bar{S}}{c_4}\sqrt{1 - c_4^2}.$$

We usually define the constants:

$$B_3 = 1 - \frac{3}{c_4}\sqrt{1 - c_4^2},$$

$$B_4 = 1 + \frac{3}{c_4}\sqrt{1 - c_4^2}.$$

Finally the control parameters may be written as:

$$UCL = B_4\bar{S}, \tag{4}$$

$$CL = \bar{S}, \tag{5}$$

$$LCL = B_3\bar{S}. \tag{6}$$

For Shewhart charts, further details are available in Montgomery [34].

2.2. The control limits using MAD estimator

The estimator based on MAD taken from medians was considered one of the robust scale estimator due to its simple formula, bounded influence function and 50% break down point (cf., [9]). The MAD estimator is defined as:

$$MAD = 1.4826MD \{|X_i - MD|\}, \quad i = 1, 2, \dots, n,$$

where MD is the sample median.

The transformed control limits for S chart based on MAD estimator developed by Abu-Shawiesh [7] are:

$$UCL = c_4b_n\overline{MAD} + 3b_n\overline{MAD}\sqrt{1 - c_4^2}, \tag{7}$$

$$LCL = c_4b_n\overline{MAD} - 3b_n\overline{MAD}\sqrt{1 - c_4^2}, \tag{8}$$

where b_n is the correction factor. The values of b_n under different subgroup sizes are calculated by Abu-Shawiesh [7].

3. Proposed bootstrap- S chart

The performance of traditional control charts depends on the distribution of process data. In the construction of all traditional charts, the normal distribution is assumed. Therefore their robustness to this assumption has long been an issue in SPC (cf., [34]). Since non-normality of the process can adversely affect the performance of the control chart, some authors have suggested bootstrap methods in the construction of control limits which are completely non-parametric and free from distributional assumptions.

3.1. Control limits using bootstrap- S estimator

Using Jackknife approach by Liu and Tang [2], the control limits based on Independent and Identically Distributed (IID) observations for B bootstrap samples can be constructed using histogram of variate $\sqrt{n}(S_n - \bar{S}_m)$ where n represents subgroup size, S_n is subgroup standard deviation and \bar{S}_m is the average standard deviation over m samples.

Hence the control limits for bootstrap- S chart are:

$$LCL = \bar{S}_m + \frac{q_{\alpha/2}}{\sqrt{n}}, \tag{9}$$

$$UCL = \bar{S}_m + \frac{q_{1-\alpha/2}}{\sqrt{n}}, \tag{10}$$

where $q_{\alpha/2}$ and $q_{1-\alpha/2}$ are used as estimated $(\frac{\alpha}{2})$ th and $(1 - \frac{\alpha}{2})$ th quantiles of variate $\sqrt{n}(S_n - \bar{S}_m)$ respectively.

4. Simulation study

The simulation study is carried out for the construction of Shewhart- S , MAD and bootstrap- S control limits. The random numbers for thirty samples each of size 5 and 10 are simulated from three non-normal distributions such as Exponential, Cauchy and Logistic distributions. The exponential and logistic are lifetime distributions which are commonly used in quality and life testing problems while Cauchy is heavy-tailed skewed distribution. The control limits of Shewhart- S , MAD and bootstrap- S charts are calculated for each distribution. For the construction of bootstrap limits, one thousand bootstrap samples are considered and the histogram of the variate $\sqrt{n}(S_n - \bar{S}_m)$ is constructed. The out-of-control points for above mentioned three distributions are also calculated so that the comparison could be made. The specific algorithm is as follows:

Step 1. The random numbers from Exponential (2) distribution are generated for thirty samples ($m = 30$) each with the subgroup size $n = 5$;

Step 2. The control limits of Shewhart- S (using Eqs. (4)–(6)) and MAD (using Eqs. (7) and (8)) are constructed;

Step 3. For each of one thousand bootstrap samples ($B = 1000$), the differences of each sample wise standard deviation and the overall standard deviation is calculated. After multiplying each difference with \sqrt{n} , the histogram is constructed;

Step 4. The bootstrap- S control limits (using Eqs. (9) and (10)) are calculated;

Step 5. The number of out-of-control points is also calculated for each of the three charts;

Step 6. The overall process is repeated for subgroup size $n = 10$;

Step 7. Steps 1–6 are repeated for other non-normal distributions such as Cauchy(0,1) and Logistic(0,1) distributions.

5. Results discussion

The findings of Table 1 show the control limits and Interval Widths (IW) for Shewhart- S , MAD and bootstrap- S control charts using subgroup size 5 and under Exponential(2), Cauchy(0,1) and Logistic(0,1) distributions. The results show that the bootstrap control chart has a shorter IW as compared to Shewhart- S and robust MAD charts for exponential and logistic processes. Hence it can be concluded that bootstrap control limits are more robust for detecting an out-of-control signal for both non-normal processes. For heavy-tailed distribution such as Cauchy distribution, the performance of MAD chart is better than the traditional Shewhart- S and proposed bootstrap- S charts in terms of having a tighter IW.

The supporting evidence is shown in Figure 1 through which the comparison of control charts can be observed. The different panels of Figure 1 represent Shewhart- S , MAD and bootstrap- S control charts with the subgroup size 5 and 10 using Exponential, Cauchy and Logistic distributions. By comparing these figures, it can clearly be observed that the control limits for bootstrap- S chart are more resistant and hence they can detect out-of-control signals more quickly.

Moreover a large number of out-of-control points show that irrespective of the wider IW than MAD chart

for heavy tailed distribution, the bootstrap- S chart has always precise control limits.

Although the out-of-control points may be used as one of the indicators of non-normality of population distribution but the clear evidence can be observed by constructing the histogram based on \sqrt{n} times the differences of bootstrapped subgroup standard deviations S_n by overall sample standard deviation \bar{S}_m .

In case of unknown population distribution, the bootstrap histogram can be helpful to estimate it. Hence the bootstrap histogram constructed in Figure 2 strongly resembles the non-normal distribution of the process. Although the simulated samples are extracted from non-normal processes but if it is supposed that the distribution is unknown as justified in most practical data sets, the bootstrap histogram can be evident for its abnormality.

6. Comparative study

This section comprises the performance comparison of proposed chart with traditional Shewhart- S and robust MAD charts developed by Abu-Shawiesh [7]. The performance of these charts is evaluated on the basis of simulated out-of-control points under non-normal processes. It is observed that for heavy tailed distributions such as Cauchy distribution, although the MAD chart showed tighter IW (Table 1) but the proposed bootstrap- S chart has relatively precise limits which can also be verified by calculating out-of-control points (Table 2).

On the basis of a large number of out-of-control points (Table 2), it is concluded that if underlying process is not normal, the bootstrap- S control limits are more resistant to show the out-of-control position as compared to traditional Shewhart- S and robust MAD charts. Our findings also agree with the study of Liu and Tang [2] in which bootstrap control limits showed better performance as compared to the standard charts under non-normal processes. In recent literature, the variability control limits based on bootstrap estimator are found to be robust under normal process by Saeed and Kamal [15].

Table 1. Control limits and interval widths (in brackets) under non-normal distributions.

Control charts	Exponential(2)		Cauchy(0,1)		Logistic(0,1)	
	$n = 5$	$n = 10$	$n = 5$	$n = 10$	$n = 5$	$n = 10$
S	0–0.992 (0.992)	0.121–0.733 (0.612)	0–15.426 (15.426)	1.546–9.343 (7.796)	0–3.399 (3.399)	0.478–2.886 (2.408)
MAD	0–0.695 (0.695)	0.085–0.516 (0.431)	0–4.618 (4.618)	0.457–2.763 (2.306)	0–2.654 (2.654)	0.451–2.724 (2.274)
$Bootstrap-S$	0.338–0.596 (0.258)	0.340–0.546 (0.206)	3.410–12.881 (9.471)	3.320–8.648 (5.327)	1.252–2.024 (0.772)	1.458–1.990 (0.531)

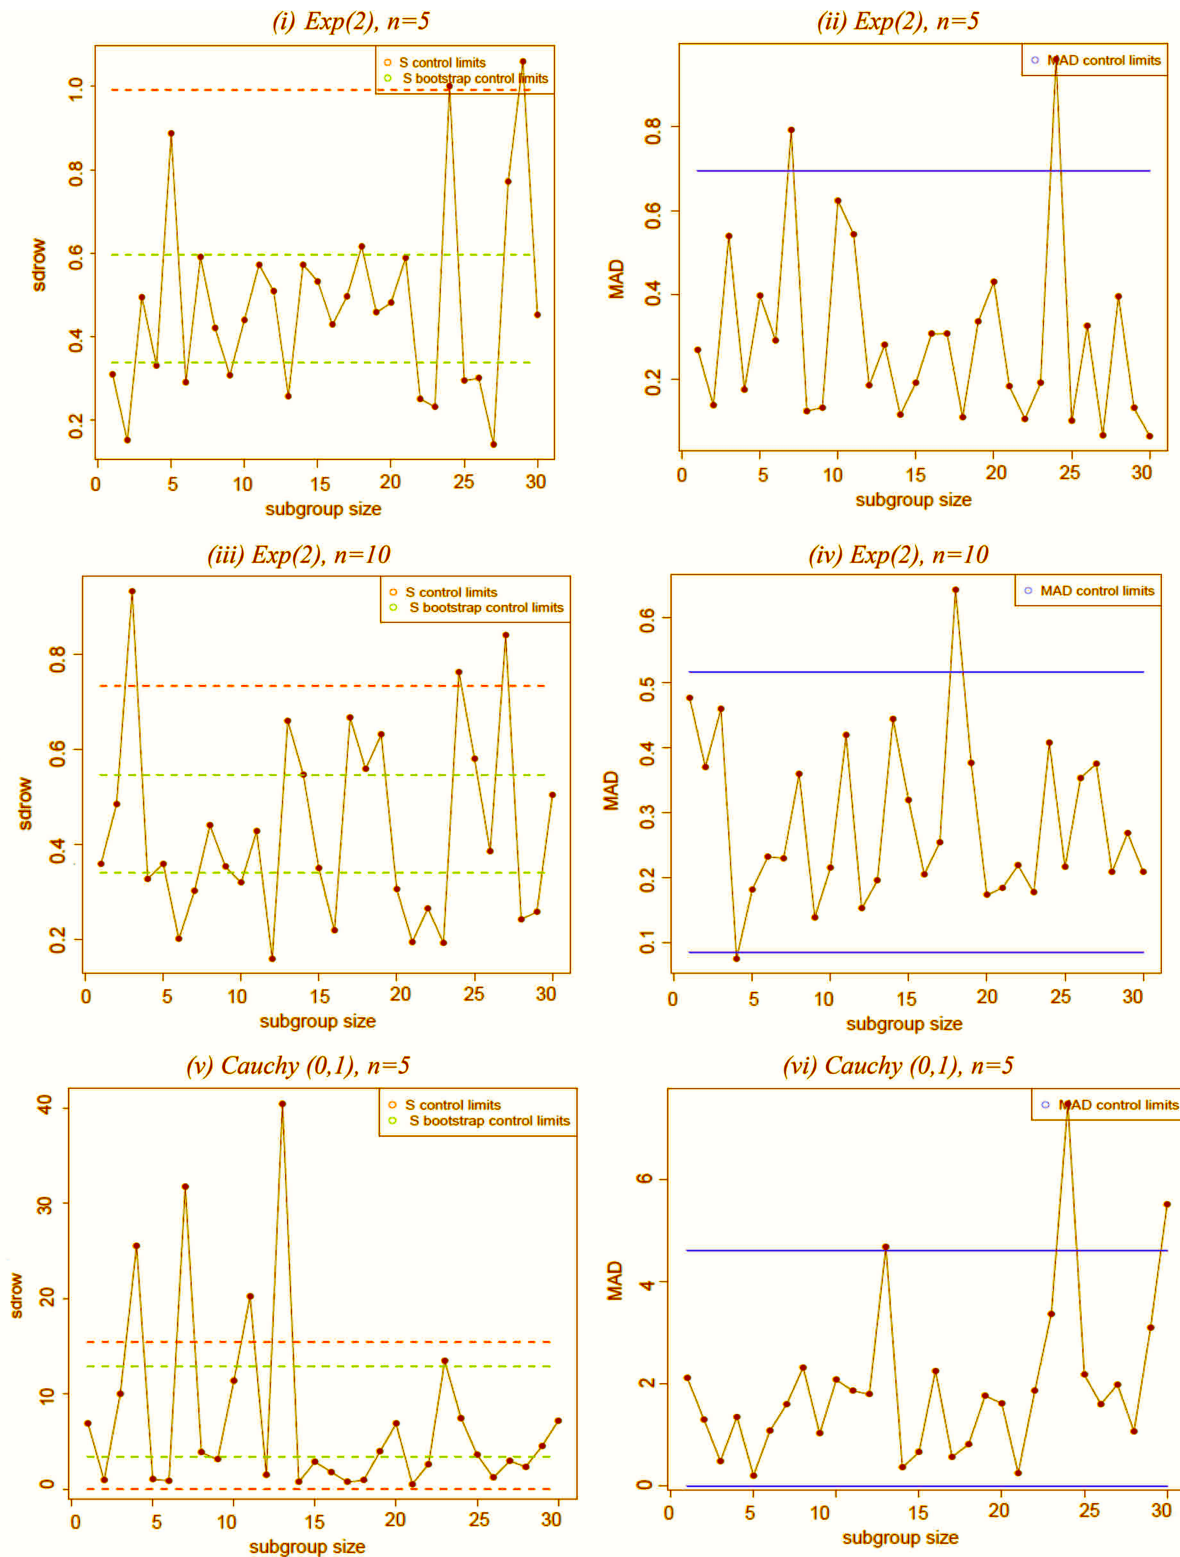


Figure 1. Shewhart-S, MAD and bootstrap-S control charts.

7. An industrial application

The data related to melting index of an extrusion grade polyethylene compound, used by Elamir [35] and Saeed and Kamal [36], are provided in Table 3. The seven

days data set is measured on twenty consecutive shifts with the subgroup size $n = 4$.

The control limits of Shewhart-S and MAD charts are calculated for twenty samples each with the subgroup size $n = 4$. Over one thousand bootstrap

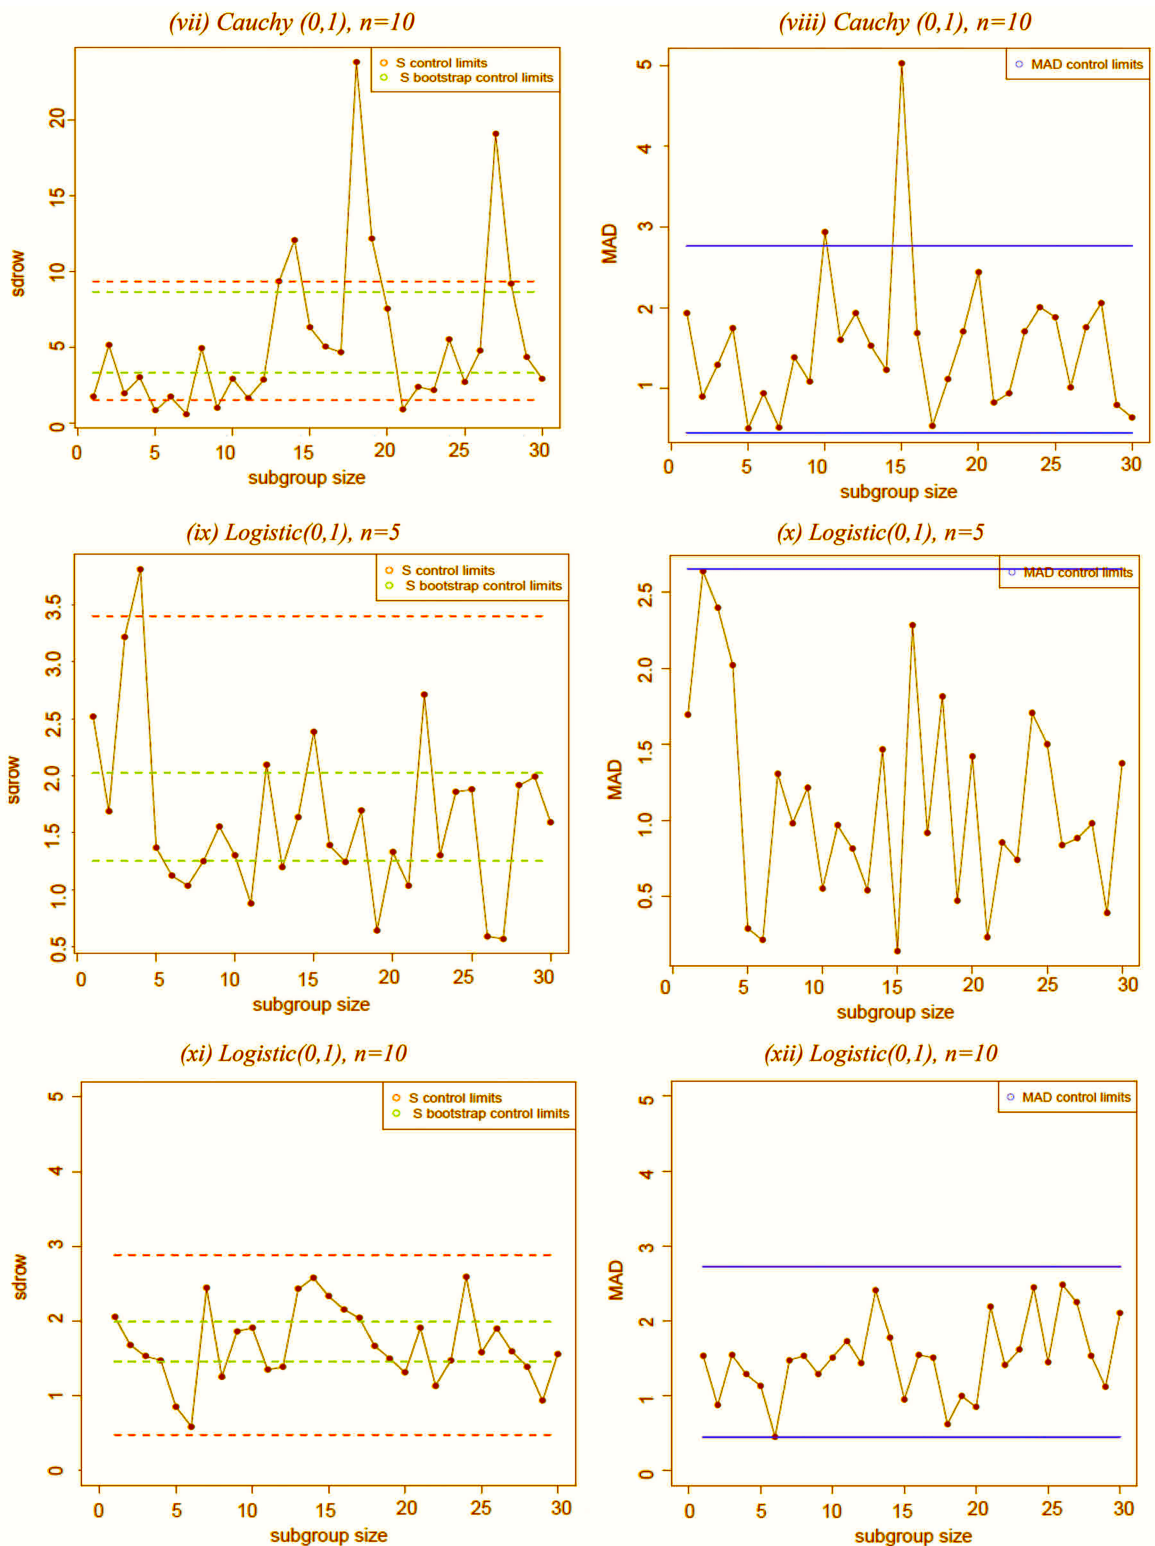


Figure 1. Shewhart-*S*, *MAD* and bootstrap-*S* control charts (continued).

samples ($B = 1000$), the bootstrap-*S* control limits are constructed.

Table 4 signifies the control limits, IW and out-of-control points using Shewhart-*S*, *MAD* and bootstrap-*S* charts respectively for monitoring process variability.

The shortest IW of bootstrap-*S* chart indicating its robustness to detect out-of-control points more quickly which also resulting from a large number of out-of-control points. The similar results are shown through the control charts in Figure 3 (panel i-ii).

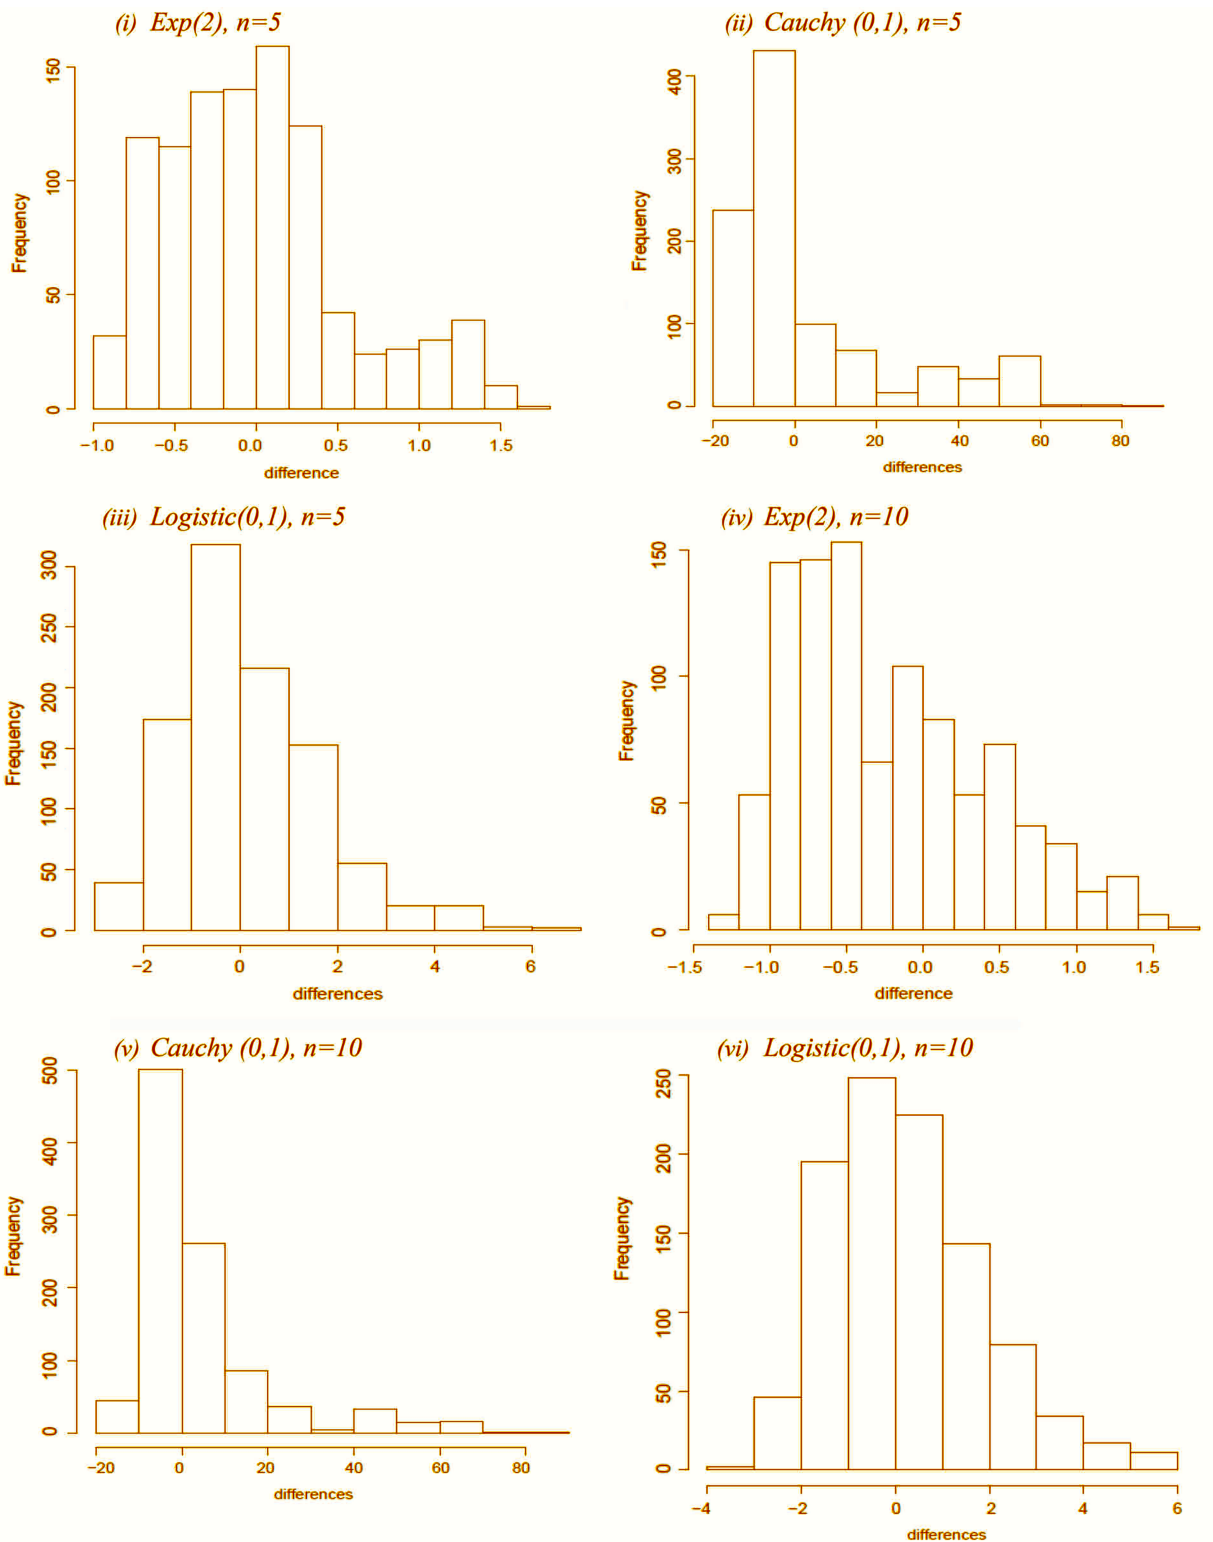


Figure 2. The histogram of $\sqrt{n}(S_n - \bar{S}_m)$ differences of bootstrap samples.

Moreover the histogram of $\sqrt{n}(S_n - \bar{S}_m)$ differences indicates the non-normality of population distribution (panel-iii). Hence it is observed that the traditional Shewhart chart for variability based on the assumption of normality does not provide a

clear indication if the process shows a departure from normality. Similarly, the chart based on *MAD* estimator shows no out-of-control points while bootstrap-*S* control chart indicates more out-of-control points when process distribution is non-normal (Table 4).

Table 2. Number of out-of- control points.

Control charts	Exponential(2)		Cauchy(0,1)		Logistic(0,1)	
	$n = 5$	$n = 10$	$n = 5$	$n = 10$	$n = 5$	$n = 10$
S (Shewhart 1931)	2	3	4	8	1	0
MAD (Shawiesh 2008)	2	2	3	2	0	0
Proposed (Bootstrap- S)	16	21	20	21	15	17

Table 3. The data set of melt index measurements used by Elamir [35].

Day	Day 1			Day 2			Day 3			Day 4			Day 5			Day 6			Day 7	
Shift	I	II	III	I	II	III	I	II	III	I	II	III	I	II	III	I	II	III	I	II
	218	228	280	210	243	225	240	244	238	228	218	226	224	230	224	232	243	247	224	236
	224	236	228	249	240	250	238	248	233	238	232	231	221	220	228	240	250	238	228	230
	220	247	228	241	230	258	240	265	252	220	230	236	230	227	226	241	248	244	228	230
	231	234	221	246	230	244	243	234	243	230	226	242	222	226	240	232	250	230	246	232

Table 4. Control limits and out-of-control points of melt index data set.

Control charts	UCL	CL	LCL	IW	Out-of-control points
<i>Shewhart-S</i>	18.939	8.358	0	18.939	1
<i>MAD</i>	14.874	6.564	0	14.874	0
<i>Bootstrap-S</i>	13.588	10.160	7.167	6.421	13

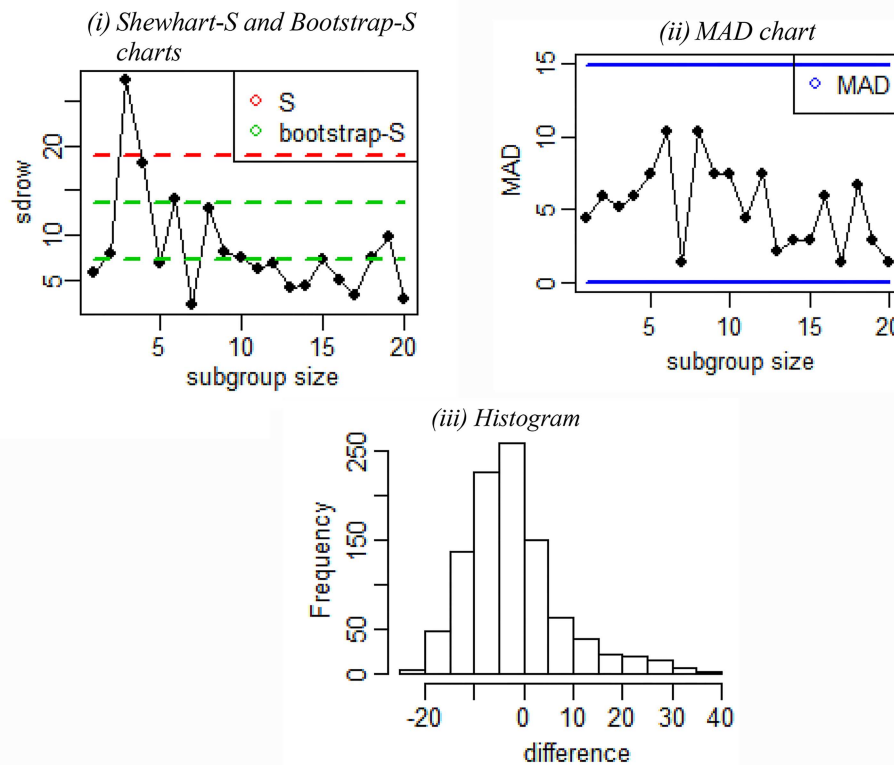


Figure 3. The control charts and bootstrap histogram of melt index data set.

8. Conclusion

The bootstrap methods are popular due to their good theoretical properties. In statistical process control, traditional Shewhart- S chart is useful only if data follow the normal distribution. In real life, mostly data sets do not follow the normal distribution. Due to the reason, the bootstrap- S control chart based percentile bootstrap method is proposed. Under the good properties of bootstrap methods, the proposed bootstrap- S chart has performed well under non-normal distribution i.e. exponential, Cauchy and logistic distributions. Based on the similar approach as proposed by Liu and Tang [2], the proposed bootstrap- S chart showed better performance than the traditional Shewhart- S and MAD charts due to the detection of a large number of out-of-control points under non-normal processes. Moreover, the bootstrap methods are also helpful to find the population distribution using the sampling distribution of bootstrap statistic. Since in real life, the distribution of the process data does not necessarily follow the normal distribution, our proposed control chart may be recommended as it does not require any distributional assumption. Furthermore, the study can be extended on fair grounds for other types of bootstrap methods, i.e., parametric or moving block bootstrap methods.

Acknowledgement

The authors are thankful to the editor and reviewers for their valuable comments to improve the quality of this manuscript.

Conflict of interest

The authors declare no conflict of interests regarding the publication of this paper.

References

- Shewhart, W.A., *Economic Control of Quality of Manufacturing Product*, Van Nostrand, New York (1931).
- Liu, R.Y. and Tang, J. “Control charts for dependent and independent measurements based on bootstrap methods”, *Journal of the American Statistical Association*, **91**(436), pp. 1694–1700 (1996). DOI: 10.1080/01621459.1996.10476740
- Bonett, D.G. “Confidence interval for a coefficient of quartile variation”, *Computational Statistics & Data Analysis*, **50**, pp. 2953–2957 (2006). <https://doi.org/10.1016/j.csda.2005.05.007>
- Tukey, J.W. “A survey of sampling from contaminated distributions”, In *Contributions to Probability and Statistics*, Essays in Honor of Harold Hotelling, Olkin I. et al. (Eds.), Stanford University Press: Stanford, pp. 448–485 (1960).
- Mosteller, F. and Tukey, J.W., *Data Analysis and Regression: A Second Course in Statistics*, Addison-Wesley, USA (1977).
- Hampel, F.R. “The influence curve and its role in robust estimation”, *Journal of the American Statistical Association*, **69**, pp. 383–393 (1974). <https://doi.org/10.1080/01621459.1974.10482962>
- Abu-Shawiesh, M.O. “A simple robust control chart based on MAD”, *Journal of Mathematics and Statistics*, **4**(2), pp. 102–107 (2008). DOI: 10.3844/jmssp.2008.102.107
- Adekeye, K.S. and Azubuike, P.I. “Derivation of the limits for control chart using the median absolute deviation for monitoring non normal process”, *Journal of Mathematics and Statistics*, **8**(1), pp. 37–41 (2012). DOI: 10.3844/jmssp.2012.37.41
- Rousseeuw, P.J. and Croux, C. “Alternative to median absolute deviation”, *Journal of the American Statistical Association*, **88**(424), pp. 1273–1283 (1993). DOI: 10.1080/01621459.1993.10476408
- Efron, B. “Bootstrap methods: another look at the Jackknife”, *The Annals of Applied Statistics*, **7**, pp. 1–26 (1979). DOI: 10.1214/aos/1176344552
- Liu, Y., Liang, J., and Qian, J. “Moving blocks bootstrap control chart for dependent multivariate data”, *IEEE International Conference on Systems, Man and Cybernetics*, pp. 5177–5182 (2004). DOI: 10.1109/ICSMC.2004.1401016
- Nichols, M.D. and Padgett, W.J. “A bootstrap control chart for weibull percentiles”, *Quality and Reliability Engineering International*, **22**, pp. 141–151 (2006). DOI: 10.1002/qre.691
- Chatterjee, S. and Qiu, P. “Distribution-free cumulative sum control charts using bootstrap based control limits”, *The Annals of Applied Statistics*, **3**(1), pp. 349–369 (2009). DOI: 10.1214/08-AOAS197
- Wararit, P. and Somchit, W. “Bootstrap confidence intervals of the difference between two process capability indices for half logistic distribution”, *Pakistan Journal of Statistics and Operation Research*, **8**(4), pp. 879–894 (2012). DOI: 10.18187/pjsor.v8i4.455
- Saeed, N. and Kamal, S. “The bootstrap S-chart for process variability: an alternative to MAD chart”, *Journal of Quality and Technology Management*, **10**(2), pp. 109–124 (2014). <https://pu.edu.pk/images/journal/iqtm/PDF-FILES/05-The%20Bootstrap%20S-Chart%20for%20Process%20Variability-Nadia%20Saeed.pdf>
- Wang, D. and Hryniewicz, O. “A fuzzy non-parametric shewhart chart based on the bootstrap approach”, *International Journal of Applied Mathematics and Computer Science*, **25**(2), pp. 389–401 (2015). <https://doi.org/10.1515/amcs-2015-0030>

17. Hila, Z.N., Safih, L.M., and Shazrahanim, K.N. “Modeling of moving centerline exponentially weighted moving average (MCEWMA) with bootstrap approach”, *International Journal of Applied Business and Economics Research*, **14**(2), pp. 621–638 (2016).
https://serialsjournals.com/abstract/62286_621-638.pdf
18. Zhao, M.J. and Driscoll, A.R. “The c-chart with bootstrap adjusted control limits to improve conditional performance”, *Quality and Reliability Engineering International*, **32**, pp. 2871–2881 (2016).
DOI: 10.1002/qre.1971
19. Kashif, M., Aslam, M., Rao, G.S., et al. “Bootstrap confidence intervals of the modified process capability index for weibull distribution”, *Arabian Journal for Science and Engineering*, **42**, pp. 4565–4573 (2017).
DOI: 10.1007/s13369-017-2562-7
20. Marchant, C., Leiva, V., Cysneiros, F.J.A., et al. “Robust multivariate control charts based on birnbaum-saunders distributions”, *Journal of Statistical Computation and Simulation*, **88**(1), pp. 182–202 (2018).
DOI: 10.1080/00949655.2017.1381699
21. Ikpotokin, O. and Siloko, I.U. “A comparative analysis of bootstrap multivariate exponentially-weighted moving average (BMEWMA) control limits”, *Industrial Engineering & Management Systems*, **18**(3), pp. 315–329 (2019).
DOI: 10.7232/iems.2019.18.3.315
22. Mutlu, E.C. and Alakent, B. “Revisiting reweighted robust standard deviation estimators for univariate shewhart S-charts”, *Quality and Reliability Engineering International*, **35**, pp. 995–1009 (2019).
<https://doi.org/10.1002/qre.2441>
23. Koukouvinos, C. and Lappa, A. “A moving average control chart using a robust scale estimator for process dispersion”, *Quality and Reliability Engineering International*, **35**, pp. 2462–2493 (2019).
DOI: 10.1002/qre.2537
24. Mahdizadeh, M. and Zamanzade, E. “On interval estimation of the population mean in ranked set sampling”, *Communications in Statistics-Simulation and Computation*, **51**(5), PP. 2747–2768 (2020).
<https://doi.org/10.1080/03610918.2019.1700276>
25. Mahdizadeh, M. and Zamanzade, E. “Confidence intervals for quantiles in ranked set sampling”, *Iranian Journal of Science and Technology, Transactions A: Science*, **43**, pp. 3017–3028 (2019).
DOI: 10.1007/s40995-019-00790-6
26. Ajadi, J.O., Wang, Z., and Zwetsloot, I.M. “A review of dispersion control charts for multivariate individual observations”, *Quality Engineering*, **33**(3), pp. 1–16 (2020).
DOI: 10.1080/08982112.2020.1755438
27. Ugaz, W., Alonso, A.M., and Sánchez, I. “Adaptive EWMA-S2 control charts with adaptive smoothing parameter”, *Quality Engineering*, **33**(1), pp. 1–13 (2020).
DOI: 10.1080/08982112.2020.1776326
28. Kim, M. and Lee, J. “Geometric charts with bootstrap-based control limits using the bayes estimator”, *Communications for Statistical Applications and Methods*, **27**, pp. 65–77 (2020).
DOI: 10.29220/CSAM.2020.27.1.065
29. Moheghi, H.R., Noorossana, R., and Ahmadi, O. “GLM profile monitoring using robust estimators”, *Quality and Reliability Engineering International*, **37**(2), pp. 664–680 (2021).
DOI: 10.1002/qre.2755
30. Dizicheh, M.A., Iranpanah, N., and Zamanzade E. “Bootstrap methods for judgment post stratification”, *Statistical Papers*, **62**, pp. 2453–2471 (2021).
<https://doi.org/10.1007/s00362-020-01197-x>
31. Ahmed, A., Sanaullah, A., and Hanif, M. “A robust alternate to the HEWMA control chart under non-normality”, *Quality Technology & Quantitative Management*, **17**(4), pp. 423–447 (2020).
DOI: 10.1080/16843703.2019.1662218
32. Raza, M.A., Nawaz, T., and Han, D. “On designing distribution-free homogeneously weighted moving average control charts”, *Journal of Testing and Evaluation*, **48**(4), pp. 3154–3171 (2020).
<https://doi.org/10.1520/JTE20180550>
33. Abu-Shawiesh, M.O., Riaz, M., and Khaliq, Q. “MTSD-TCC: A robust alternative to Tukey’s control chart (TCC) based on the modified trimmed standard deviation (MTSD)”, *Mathematics and Statistics*, **8**(3), pp. 262–277 (2020).
DOI: 10.13189/ms.2020.080304
34. Montgomery, D.C., *Introduction to Statistical Quality Control*, 6th Edn. Wiley, New York (2011).
35. Elamir, E. “Probability distribution theory, generalizations and applications of L-moments”, Dissertation, Durham University (2001).
http://etheses.dur.ac.uk/3987/1/3987_1504.pdf
36. Saeed, N. and Kamal, S. “New EWMA control charts for monitoring mean under non-normal processes using repetitive sampling”, *Iranian Journal of Science and Technology*, **43**(3), pp. 1215–1225 (2018).
DOI: 10.1007/s40995-018-0586-9

Biographies

Nadia Saeed is an Assistant Professor at College of Statistical and Actuarial Sciences, University of the Punjab, Lahore. She received her PhD from University of the Punjab, Lahore-Pakistan. Nadia’s publications have appeared in national and international journals. The areas of her research interest include Statistical Quality Control, Robust Methods and Statistical Inference.

Shahid Kamal is a Professor. He served University of the Punjab since 1985 and currently performing

the duties of Vice Chancellor, GC University Faisalabad. He received his PhD from Exeter University, Exeter, UK and awarded research scholarship. He has tremendously contributed for the uplift of quality education with current era need. His current research interests include statistical process control, regression and robust methods.

Muhammad Aslam received his PhD (statistics)

from NCBA & E, Pakistan. Professor Aslam is the founder of Neutrosophic Inferential Statistics (NIS), Neutrosophic Circular Statistics (NCS), Neutrosophic Applied Statistics (NAS), and Neutrosophic Statistical Quality Control (NSQC). He is the author of three books. He is listed in, top 2% of scientists of the world in the list released by Standford University, USA, and at rank 35/93 among the King Abdulaziz University scientists.