



Review of advanced combustion technology using low temperature combustion in automobile industries

Muthusamy Subramiam Kumaravel ^a, Tharmarajapandian Surulivel Rajan ^{b,*}, Natarajan Alagumurthi ^c, Palaniappan Thangavel ^d, Kuppusamy Raja ^a

a. Department of Mechanical Engineering, Sri Jayaram Institute of Engineering and Technology, Chennai, India.

b. Department of Mechanical Engineering, Prince Shri Venkateshwara Padmavathy Engineering College, Chennai, India.

c. Department of Mechanical Engineering, Pondicherry Engineering College, Pondicherry, India.

d. Department of Mechanical Engineering, Shree Venkateshwara Hi-Tech Engineering College, Erode, India.

* Corresponding author: surulivelt@gmail.com (T. Surulivel Rajan)

Received 11 December 2022; Received in revised form 13 May 2023; Accepted 21 January 2024

Keywords

Internal Combustion engine (IC);
Low Temperature Combustion (LTC);
Nitrogen Oxides (NO_x);
Particulate Matter (PM);
Reactivity Controlled Compression Ignition (RCCI).

Abstract

An overview has been presented related to the advances in Internal Combustion engines (IC) for future solutions of the automotive industry. This review discusses as many current research areas as possible. This evaluation will be of great assistance to students, researchers, and enterprises working on the subject of IC engines. Moreover, there are numerous technological options for delivering environmentally friendly vehicles with low carbon emissions. This paper also examines the methods available as well as the use of technology road-mapping to plan for future manufacturer adoption. The Low Temperature Combustion (LTC) technique is among the most sophisticated combustion technologies. Various LTC techniques like Homogeneous Charge Compression Ignition (HCCI), Premixed Charge Compression Ignition (PCCI), and Reactivity Controlled Compression Ignition (RCCI) have been discussed in detail. The results of the evaluation of LTC against conventional engines were provided in order to demonstrate both the strengths and shortcomings of each. The goal of this review article is to show new combustion approaches and how they may be utilized to increase the engine's thermal efficiency while lowering Nitrogen Oxide (NO_x) and Particulate Matter (PM) emissions.

1. Introduction

Vehicle discharges have risen to become the world's most significant source of air contamination, owing to tremendous economic growth [1]. The automotive industry is confronting tremendous difficulties in developing efficiency and outflows from Internal Combustion engines (IC) [2]. The depletion of petroleum supplies is a serious issue that has to be addressed by the international community using cutting-edge technology [3]. Excessive use of petroleum products contributes to global warming and the rapid exhaustion of petroleum resources [4]. New environmental restrictions have compelled the hunt for new sorts of technologies to address the problems caused by IC engine emissions [5]. Several environmental challenges have arisen as a result of

the vehicle sector's market expansion, such as carbon emissions, global warming, greenhouse gas emissions, atmospheric air pollution, and climatic changes [6]. In order to prevent knock-like combustion, Bastawissi et al. [7] examined the Homogeneous Charge Compression Ignition (HCCI) engine under various load conditions by varying the amount of dimethyl ether and Hydrogen (H₂) fuels injected in to the inlet air. Another benefit is that they mixed fuels such as Di-Methyl Ether (DME) and H₂ with Compressed Natural Gas (CNG) to ensure stable operation.

Automobile engines and fuels are encountering difficulties in reducing emissions, improving air quality in local cities, and improving fuel efficiency, which decreases

To cite this article:

M.S. Kumaravel, T. Surulivel Rajan, N. Alagumurthi, P. Thangavel, K. Raja "Review of advanced combustion technology using low temperature combustion in automobile industries", *Scientia Iranica* (2025) 32(11): 7387. <https://doi.org/10.24200/sci.2024.61586.7387>

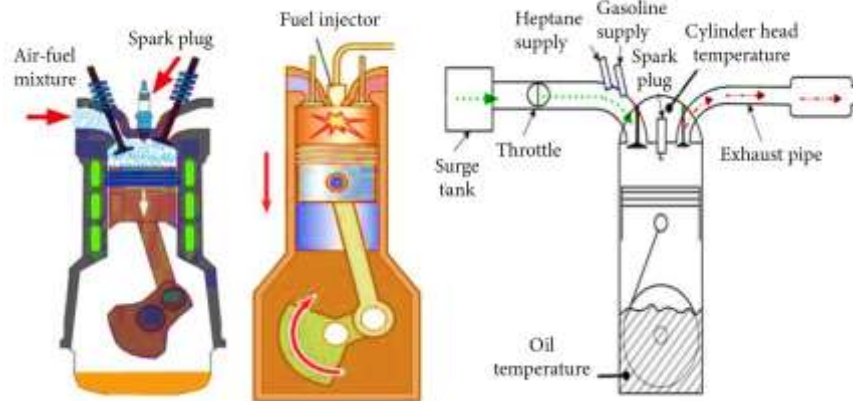


Figure 1. (a) SI engine; (b) CI engine; and (c) HCCI Engine [16].

CO₂ emissions to mitigate global warming [8]. To optimise combustion engines' tolerance to a wide variety of fuels, engine researchers must develop technologies designed to maximize engine efficiency and reduce exhaust emissions [9]. Therefore, it is important to create new technologies to protect the environment for present and future generations. The Low Temperature Combustion (LTC) is a type of advanced IC engine combustion that has sparked a lot of interest in recent years [10]. The automobile industry's difficulties can be mitigated by using LTC to improve existing engine technology [11]. LTC-based engines can achieve high thermal efficiency while emitting low levels of Nitrogen Oxides (NO_x) and Particulate Matter (PM) [12].

As LTC has a lower combustion temperature, it consumes less energy and has better thermal performance. LTC improves the environment by reducing emissions by eliminating NO_x and PM levels. LTC-based engines adopt different types of fuels with enhanced performance. It uses low-quality fuels in IC engines and has overall better combustion characteristics. This review article's major goal is to determine how cutting-edge LTC technology is being used to effectively lower NO_x and PM emissions while simultaneously enhancing thermal efficiency. The goal of this study is to assess LTC engines and their combustion features by looking at the most recent research. This review article discusses the most recent sophisticated technology as well as enhancements to older LTC engines.

2. HCCI engine

HCCI combustion is used to describe the novel LTC concept. Riyadi et al. [13] used a promising technique called the HCCI engine, which uses premixed combustion to produce a homogeneous, lean mixture that will ignite on its own. Controlling its combustion phasing, however, is still a difficult task. Additionally, HCCI engines emit considerable amounts of Unburned Hydro-Carbon (UHC) and Carbon monoxide (CO). The working principle of the LTC engine is illustrated in Figure 1. The LTC engines have the potential to produce the highest Brake Thermal Efficiency (BTE) with the least expenditure [14]. Elkelawy [15] studied "the fuel cavitation inside the injector nozzle parameters (such as injection pressure and fuel system temperature where fuel premixed ratio, NO_x, CO₂, and UHC emissions are measured) in order to develop a methodology for the HCCI combustion mode using diesel aerosol/air mixtures." The injection pressure of fuel and the temperature of the fuel

system have been optimised to provide an appropriate fuel premixed ratio and the optimal fuel/air mixture for a wide range of engine operating conditions based on engine efficiency as well as engine emission characteristics. The optimal fuel injection pressure is about in the range of 150 to 200 bars, and the temperature of the fuel system is about in the range of 175 to 200°C.

Chaudhari and Deshmukh [17] designed premixed LTC engines for clean combustion and efficiency gains. For the initiation of combustion in the LTC engine, they controlled crucial variables such as inlet air pressure, temperature, pressure, and compression ratio. Wang et al. [18] looked at the possibility of a diesel-fueled LTC engine with excellent thermal efficiency while emitting minimal NO_x and PM at low loads. They achieved a thermal efficiency of 50% with a minimum fuel consumption of 168.6 g/kWh and an Exhaust Gas Recirculation (EGR) rate of 56% at a speed of 1900 r/min. The combustion mode of HCCI is a viable future technology for the development of 1900 r/min. The combustion mode of HCCI is a visible future technology for the development of IC engines due to its great thermal efficiency.

Although HCCI engines have improved thermal efficiency, their limited stable working range is widely regarded as their most significant disadvantage. Recent research has suggested that HCCI engines and their combustion characteristics can be improved with the use of nanoparticles as fuel additives [19]. In order to achieve stable HCCI combustion in the engine cylinder, Elkelawy et al. [20] studied "the detailed oxidation mechanism of natural gas in HCCI". According to their findings, "Cycle simulations utilising H₂ as an additive to the natural gas have identified the key factors influencing the engine's combustion efficiency and emission characteristics, and they also suggested the limits of potential improvement in comparison to traditional natural gas-HCCI engine technologies." El-Din Mohammad et al. [21] used DME, which will be crucial in regulating the auto-ignition time of the HCCI engine combustion, particularly at low intake charge temperatures. H₂ may assist in increasing the working range of CNG fuel in HCCI engines and drastically reducing their regulated emissions. The viscosity of the mixed gasoline reduces with an increase in DME, while the vapour pressure in the fuel system slightly rises. A suitable higher fuel vapour pressure may have beneficial impacts on the formation of a homogenous mixture for an HCCI engine. Yu et al. [22]

concluded that while both hydrocarbon and carbon monoxide emissions are relatively high, with the exception of high load situations, an HCCI engine running on DME50 is smokeless and emits nearly zero NO_x [22]. Phase change materials are used for latent heat storage applications [23]. The addition of nanoparticles enhances the phase change material's thermal conductivity property [24]. So, it is used as a better choice for thermal energy management and heat transfer application [25]. Aluminium, Steel, and its alloy containers are used as encapsulations for phase change materials [26].

Wang et al. [27] focused on the characterization of the HCCI engine's combustion characteristics by using natural gas as fuel at different conditions. They desired to overcome the challenges of regulating the combustion process in HCCI engines. They carried out sensitivity analyses of Start of Combustion (SOC) to in-take temperature and excessive air ratio at different speeds. Their result suggested that SOC can be controlled by regulating the pressure and temperature in the cylinder through the addition of EGR, the addition of water, and modifying the inlet temperature at moderate speed. Elkelawy et al. [28] analysed a promising low-temperature technique, the HCCI diesel engine, employing ethanol as a fuel additive to boost the amount of oxygen needed for combustion in fuel-biodiesel blends. Diesel-biodiesel-ethanol blends have higher Specific Fuel Consumption (SFC) than diesel fuel. The higher SFC is a result of the biodiesel blend's lower energy content and reduced calorific value. Increasing the brake power of pure diesel and oxygenated fuel mixtures enhanced the thermal efficiency of the brakes. There was improvement in the BTE for various three different biodiesel mixtures because of their higher volatility, high viscosity, and lower calorific value. Solmaz et al. [29] used B20 fuel devoid of the Multi-Walled Carbon Nanotube (MWCNT) addition. The characteristics of B20 were improved by the addition of MWCNT. Their research showed that the inclusion of the MWCNT additive boosted thermal efficiency (33.16%) and enhanced HCCI engine performance by utilising 100 ppm preservative B20 fuel.

3. Premixed Charge Compression Ignition (PCCI) engine

Singh and Agarwal [30] concluded that the achievement of superior thermal efficiency has always been challenging in HCCI engines [30]. Jeon and Bae [31] promoted research to look for and discover superior technologies. Premixed Charge Compression Ignition (PCCI) combustion is more sophisticated than Homogeneous Charge Compression Ignition (HCCI) combustion. Elkelawy et al. [32] examined diesel engines with Partially Premixed Lean Charge Compression Ignition (PPLCCI) combustion that are capable of reducing NO_x and PM emission output while maintaining improved engine BTE.

Jain et al. [33] reported on the combustion stability of the PCCI engine by analysing the fuel injection parameter. Reducing knocking and minimising the emissions of NO_x have been the main objectives of the PCCI engine. Combustion stability was achieved in the PCCI engine by maintaining the pressure of fuel injection at about 700 bar. This was possible owing to excellent fuel atomization at a higher Fuel Injection Pressure (FIP). Lower CO and UHC

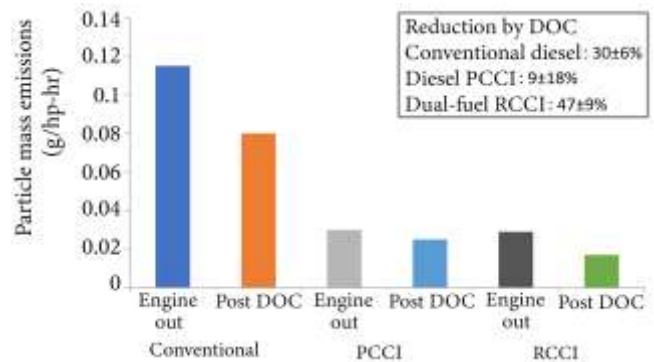


Figure 2. PCCI Combustion for improved Diesel engine emissions [37].

emissions can be achieved in PCCI engines [34]. Oxyhydrogen gas was used by Bhawe et al. [35] to supplement the fuel in the PCCI engine, and they contrasted PCCI mode with and without the addition of oxyhydrogen gas. Their findings demonstrated that peak pressure and thermal efficiency were all enhanced by the addition of oxyhydrogen gas. They also revealed that their analysis found very little NO_x emissions, or less than 10 ppm.

Strict emission norms have forced all investigations to find advanced technology with low emissions. Srihari et al. [36] examined the effect of diethyl ether in biodiesel blends in PCCI-Direct Injection (PCCI-DI) engines. They used biodiesel produced from cotton seed, and their emissions were lower in UHC, CO, and NO_x values. They also noticed an increase in BTE in the PCCI-DI engine. Alemayehu et al. [37] focused on better emission properties in PCCI engines. A conventional IC engine with an unacceptable emission range was compared with the newly developed PCCI engine. The PCCI engine produced the minimum amount of oxides of nitrogen and PM. They employed EGR adjustment at various loads to help the PCCI engine achieve the best performance. In the PCCI engine, they were also to create improved thermal efficiency with the least amount of negative emission impacts. Figure 2 shows better combustion effects in the PCCI engine. Single-fuelled and dual-fuelled single-cylinder engine performance characteristics were compared by Shim et al. [38].

The PCCI engine's combustion performance and engine emission characteristics running on ethanol diesel mixes were examined by Elzahaby et al. [39]. In research, a single-zone model is used to forecast how the PCCI engine will operate at various premixed ratios of ethanol-diesel fuel mixtures. The results demonstrated that chemical kinetic behaviour in PCCI combustion is highly capable of controlling the ignition of the engine and the combustion process by employing the premixed ratio of the ethanol/diesel mixture. They reported that dual-fuel PCCI combustion could reduce CO_2 emissions and achieve higher thermal efficiency than standard diesel combustion.

Muruga Nachippanan et al. [40] investigated the effectiveness of a PCCI engine running on Tamanu biodiesel combined with MWCNT. They discovered that the physiochemical characteristics of Tamanu biodiesel were enhanced by the use of nanoparticles. The optimal characteristics of Tamanu biodiesel were enhanced by the use of nanoparticles. The optimum choice, according to the results, is to add 100 ppm of MWCNT to Tamanu biodiesel in PCCI mode.

Ramachandran et al. [41] examined “the ideal mixture of biodiesel with nanoparticles in a 5.2 kW CI engine for various amounts (B10, B20, B30, and B40). About 20% of the fuel provided is guaranteed to be vaporised for premixing by the PCCI function. Finally, the ideal amount of desired dependent and independent variables was determined by using Response Surface Methodology (RSM) to investigate the interactions between the independent variables of the PCCI engine”. The engine was used to test and validate the project blend ratio for B25. The results showed a rise in BTE to 31.42% and a decrease in Brake Specific Energy Consumption (BSEC) to 9.82 MJ/kWh, as well as a decrease in NO_x to 691 ppm [42].

Charitha et al. [43] developed a “Reactivity-Controlled Compression Ignition (RCCI) combustion engine” by modifying the intake of a diesel engine. They studied the difference between Conventional Diesel Combustion (CDC) engines and RCCI engines and investigated their engine performance and emission characteristics. With the addition of Cotton Seed Biodiesel (CSBD), they noticed a decrease in NO_x and particulate emissions, at decreasing CSBD%, CO_2 emissions and UHC were reduced. Any further increase in CSBD was reported to result in increased CO_2 and UHC emissions. The findings revealed that the 10%-20% CSBD, which has a 22% average reduction in NO_x and an average reduction of 30% in smoke emissions, is effective. By combining waste cooking oil and fossil diesel fuel, Elkelawy et al. [44] investigated the performance of the engine, its emission characteristics, and the combustion characteristics of the PCCI engine with different fuel injection strategies. According to their findings, the in-cylinder pressure peaks have been somewhat reduced, the apparent heat release has been decreased, and the average BTE has increased by about 10.57% compared to conventional direct injection at premixed ratio 3. Furthermore, average CO emissions were reduced by 0.241%, and average NO_x emissions were reduced by 408.8 ppm.

Yang et al. [45] used “Low Pressure Dual-fuel Direct Injection” (LPDDI) to compare and explore combustion performance and emission parameters in an RCCI engine running on diesel and CH_4 injections, which have a substantial impact on the combustion chamber. This study found that the initial diesel injection time of 250° CA After Top Dead Center (ATDC) and the newest CH_4 injection time of 112° CA ATDC yielded the best combustion performance.

Sajjad et al. [46] developed a deep learning method combined with explainable artificial intelligence to assess the heat transfer from the liquid-to-vapour phase shift in nanoporous surface coatings. Paykani et al. [47], found that compared to either Spark Ignition combustion (SI) or Compression Ignition (CI), SI is substantially quicker. By altering both CI and SI engines, the HCCI combustion mode improves thermal efficiency while retaining low emissions. With this technology, a broad range of fuels, fuel mixtures, and renewable fuels may be employed [48]. By swapping either traditional diesel or spark-ignited combustion engines, significant reductions in NO_x emissions can be accomplished [49]. In addition to lowering particular fuel usage, LTC technology offers notable advantages in the sharp decrease of NO_x and PM [50]. Dimitriou et al. [51] concluded that higher EGR rates raise the temperature of the intake charge, which improves H_2 combustion and fuel efficiency. There was a reduction in NO_x of 90 – 98% compared to that of

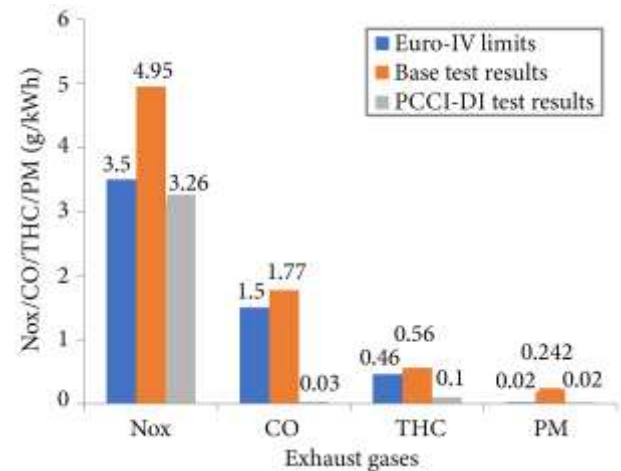


Figure 3. Performance of PM values in different ITC technology [47].

normal diesel combustion [52]. Figure 3 shows the various ranges of PM emission in advanced LTC technology with reference to the conventional engine. Ghaffarzadeh et al. [53] showed that a dual-fuel RCCI engine’s performance and emission characteristics are significantly influenced by the timing of the beginning of liquid fuel direct injection.

4. Emission characteristics

Emission characteristics were studied by Alagumalai [54] and suggested that induction of ethanol (10% and 20%) in the intake manifold and injecting waste cooking oil biodiesel directly inside the cylinder reduced NO_x emissions by 60% and smoke emissions by 29%. However, UHC and CO emissions increased in their investigation. An evaluation of RCCI-mode combustion engines using gasoline and mineral diesel in single-cylinder research engine was performed by Singh et al. [55]. “They found that adding low-reactivity gasoline to the RCCI engine made it run better performance. Also, RCCI mode combustion engine delivered low NO_x and PM emissions compared to the baseline CI mode combustion” [56]. However, both UHC and CO emissions from RCCI mode increased slightly when compared with the CI mode combustion. As far as emission, RCCI mode combustion has greater potential for the utilisation of alternative fuels with enhanced engine performance and the possible reduction of NO_x and PM emissions compared to CI and PCCI [57]. Elkelawy et al. [58] examined “The RCCI combustion engine requires a very low EGR rate because the rate of combustion is controlled by varying the mixture’s reactivity by employing two fuels with considerably different reactivities. RCCI operation with cooled EGR resulted in a decrease in pressure rise rate, cyclic variation, and NO_x emission but an increase in THC emission. At low loads, internal EGR’s lower intake air pressure achieved generally higher net indicated efficiencies and lower combustion losses than conventional RCCI. Utilising a higher EGR percentage has greater advantages for extending maximum load and reducing particulate and NO_x emissions, while the combustion and indicated thermal combustion efficiencies decrease.” Eldon et al. [59] analysed “The conversion of a CI diesel engine to dual-fuel RCCI combustion. The effects of various energy shares of carbon-free NH_3 and carbon-neutral microalgae biodiesel were investigated. The outcomes are compared with conventional

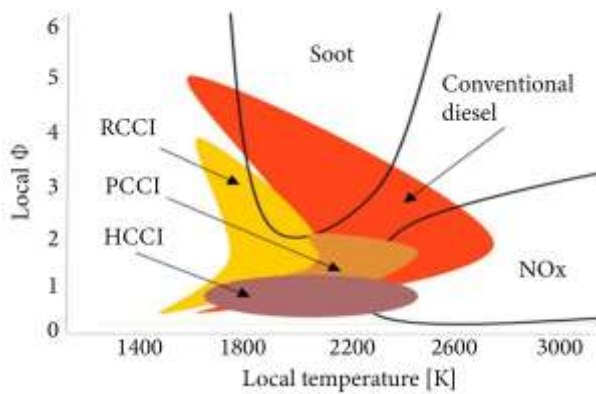


Figure 4. Emission of NO_x in different combustion mode [60].

mode running at 80% load. Operating an NH₃ dual fuel RCCI raises the ID, which causes a longer CD and lower CP". The emission of NO_x and PM in different combustion modes is presented in Figure 4.

Studies revealed that emissions of PM and NO_x affect the environment and humans [60], and Reşitoğlu et al. [61] analysed the emission control methods of pollutant exhaust gases. Boningari and Smirniotis [62] revealed the study impact of NO_x in the environment and health issues related to these gases, and hence it is vital to eliminate these emissions with the help of the latest advanced combustion technology [63]. Ranasinghe et al. [64] reviewed the use of advanced low-emission technologies for aviation. In this aspect, RCCI significantly contributes to the large reduction of NO_x and PM [65]. Zou et al. [66] investigated the EGR, which is required for controlling the phases of combustion, and the combustion characteristics of RCCI engines are reviewed [67].

In the Methanol RCCI mode, when diesel is injected with twin pulses, the thermal efficiency is greater than in the traditional dual-fuel mode, the NO emissions are significantly lower, the soot, UHC, and CO emissions are comparable, and the methanol share is increased [68]. The addition of nano cerium oxide and methyl tert-butyl ether with gasoline or with diesel further reduces the emissions and also improves the performance of the engine [69].

5. Conclusion

As a result, a thorough investigation has been conducted into advancements in Internal Combustion (IC) engines for future automotive sector solutions. This review discusses as many current research areas as possible. Various forms of Low Temperature Combustion (LTC), like Homogeneous Charge Compression Ignition (HCCI), Premixed Charge Compression Ignition (PCCI), and Reactivity Controlled Compression Ignition (RCCI), have been discussed in detail. In the end, the advantages of LTC have been presented with a comparison of conventional techniques.

- More harmful items from engines, like Oxides of Nitrogen (NO_x) and Particulate Matter (PM) reduction ideas, were discussed. Emission characteristics were discussed in detail, and it was found that RCCI has a significant impact on reducing NO_x and PM compared to PCCI and CI. Though LTC reduces NO_x emissions considerably, it has various challenges that need to be addressed;

- Furthermore, for small loads, LTC performs well, and for larger load variations, the performance of LTC is minimal;
- Overall, the research suggests that the LTC has the potential for efficiency improvements over conventional engines. Thus, this study showed that all LTC techniques may be utilised to eliminate PM and NO_x, but the RCCI combustion approach was more effective at doing so while also having a great potential to employ alternative fuel in the development of sustainable transportation options;
- The analysis of various LTC strategies demonstrates that a low amount of NO_x emissions would arise if the temperature of the combustion could be adjusted in any manner. Controlling the combustion is the main problem with the LTC. Other issues with LTC technology include its constrained working range and greater UHC and Carbon monoxide (CO) emissions.

Nomenclature

BTE	Brake Thermal Efficiency
CD	Combustion Duration
CDC	Conventional Diesel Combustion
CI	Compression Ignition
CNG	Compressed Natural Gas
CO	Carbon monoxide
CO ₂	Carbon dioxide
CSBD	Cotton Seed Biodiesel
DME	Di-Methyl Ether
EGR	Exhaust Gas Recirculation
FIP	Fuel Injection Pressure
g/kW h	Gram/kiloWatt-hour
H ₂	Hydrogen
HCCI	Homogeneous Charge Compression Ignition
IC	Internal Combustion
ID	Ignition Delay
IMEP	Indicated Mean Effective Pressure
LPDDI	Low Pressure Dual-fuel Direct Injection
LTC	Low Temperature Combustion
LTO	Low Temperature Oxidation
MWCNT	Multi-Walled Carbon Nano Tube
NO _x	Oxides of nitrogen
PCCI	Premixed Charge Compression Ignition
PHCCI	Partial Homogeneous Charge Compression Ignition
PM	Particulate Matter
PPLCCI	Partially Premixed Lean Charge Compression Ignition
ppm	Parts Per Million
RCCI	Reactivity Controlled Compression Ignition
RSM	Response Surface Methodology
SFC	Specific Fuel Consumption
SI	Spark Ignition
SOC	Start of Combustion
UHC	Unburned Hydro-Carbon

Competing Interests

The authors declare no competing financial interest.

Funding

The authors acknowledge that there are no external funding/grants received for this research work.

Authors contribution statement

First author: Conceptualization; Data curation; Formal analysis; Investigation; Methodology; Visualization; Writing – original draft;

Second author: Conceptualization; Methodology; Project administration; Resources; Supervision; Validation; Writing – review and editing;

Third author: Data curation; Investigation; Software; Validation; Visualization;

Fourth author: Formal analysis; Resources; Software; Writing – review and editing;

Fifth author: Investigation; Methodology; Validation; Writing – review and editing.

References

1. Lv, W., Hu, Y., Li, E., et al. "Evaluation of vehicle emission in Yunnan province from 2003 to 2015", *Journal of Cleaner Production*, **207**, pp. 814-825 (2019).
<https://doi.org/10.1016/j.jclepro.2018.09.227>
2. Sellnau, M., Hoyer, K., Moore, W., et al. "Advancement of GDCI engine technology for US 2025 CAFE and tier 3 emissions", *SAE Technical Paper*, 0901 (2018).
<https://doi.org/10.4271/2018-01-0901>
3. Al-Maamary, H.M., Kazem, H.A., and Chaichan, M.T. "The impact of oil price fluctuations on common renewable energies in GCC countries", *Renewable and Sustainable Energy Reviews*, **75**, pp. 989-1007 (2017).
<https://doi.org/10.1016/j.rser.2016.11.079>
4. Ingle, A.P., Chandel, A.K., Philippini, R., et al. "Advances in nanocatalysts mediated biodiesel production: A critical appraisal", *Symmetry*, **12**(2), 256 (2020).
<https://doi.org/10.3390/sym12020256>
5. Umadaran, S., Somasuntharam, P., and Samarasekara, A.M.P.B. "Preparation and characterization of cellulose and hemi-cellulose based degradable composite material using sugarcane waste", *Moratuwa Engineering Research Conference*, IEEE, pp. 367-372 (2016).
<https://doi.org/10.1109/MERCon.2016.7480169>
6. Kushwaha, G.S. and Sharma, N.K. "Green initiatives: A step towards sustainable development and firm's performance in the automobile industry", *Journal of Cleaner Production*, **121**, pp. 116-129 (2016).
<https://doi.org/10.1016/j.jclepro.2015.07.072>
7. Bastawissi, H.A.E., Elkelawy, M., Panjal, H., et al. "Optimization of the multi-carburant dose as an energy source for the application of the HCCI engine", *Fuel*, **253**, pp. 15-24 (2019).
<https://doi.org/10.1016/j.fuel.2019.04.167>
8. Slovic, A.D., de Oliveira, M.A., Biehl, J., et al. "How can urban policies improve air quality and help mitigate global climate change: a systematic mapping review", *Journal of Urban Health*, **93**(1), pp. 73-95 (2016).
<https://doi.org/10.1007/s11524-015-0007-8>
9. Mathiyazhagan, K., Sengupta, S., and Poovazhagan, L. "A decision-making trial and evaluation laboratory approach to analyse the challenges to environmentally sustainable manufacturing in Indian automobile industry", *Sustainable Production and Consumption*, **16**, pp. 58-67 (2018).
<https://doi.org/10.1016/j.spc.2018.05.007>
10. Mirgal, N. "Indian automotive industry towards Bharat Stage-VI emission norms: A technical review", *International Journal of Engineering Research and Advanced Technology*, **3**(11), pp. 9-15 (2017).
<https://doi.org/10.7324/IJERAT.2017.3.155>
11. Rieth, M., Day, M., Bansude, S., et al. "Direct numerical simulation of multi-injection ignition in low-temperature compression ignition environments", *APS Division of Fluid Dynamics Meeting Abstracts*, C05-006 (2019).
12. Singh, A.P. and Agarwal, A.K. "Low-temperature combustion: an advanced technology for internal combustion engines", *Advances in Internal Combustion Engine Research*, pp. 9-41 (2018).
https://doi.org/10.1007/978-981-10-7575-9_2
13. Riyadi, T.W.B., Spraggon, M., Herawan, S.G., et al. "Biodiesel for HCCI engine: Prospects and challenges of sustainability biodiesel for energy transition", *Results in Engineering*, **17**, 100916 (2023).
<https://doi.org/10.1016/j.rineng.2023.100916>
14. Solouk, A., Shakiba-Herfeh, M., Arora, J., et al. "Fuel consumption assessment of an electrified powertrain with a multi-mode high-efficiency engine in various levels of hybridization", *Energy Conversion and Management*, **155**, pp. 100-115 (2018).
<https://doi.org/10.1016/j.enconman.2017.10.073>
15. Elkelawy, M. "Experimental investigation of intake diesel aerosol fuel Homogeneous Charge Compression Ignition (HCCI) engine combustion and emissions", *Energy and Power Engineering*, **6**, pp. 513-526 (2014).
<https://doi.org/10.4236/epe.2014.614045>
16. Cozzi, P. and Riccio, C. *OpenGL insights*, CRC press (2012).
17. Chaudhari, V.D. and Deshmukh, D. "Diesel and diesel-gasoline fuelled premixed low temperature combustion (LTC) engine mode for clean combustion", *Fuel*, **266**, 116982 (2020).
<https://doi.org/10.1016/j.fuel.2019.116982>
18. Wang, Y., Zhu, Z., Yao, M., et al. "An investigation into the RCCI engine operation under low load and its achievable operational range at different engine speeds", *Energy Conversion and Management*, **124**, pp. 399-413 (2016).
<https://doi.org/10.1016/j.enconman.2016.07.026>
19. Şahin, F. "Utilization of Multi-Walled Carbon Nanotubes (MWCNT) additive in HCCI engine to widen operating range", *Engineering Science and*

- Technology, an International Journal*, **37**, 101301 (2023).
<https://doi.org/10.1016/j.jestch.2022.101301>
20. Elkelawy, M., Yu-Sheng, Z., El-Din, H., et al. "A comprehensive modeling study of natural gas (HCCI) engine combustion enhancement by using hydrogen addition", *SAE Technical Paper*, 1706 (2008).
<https://doi.org/10.4271/2008-01-1706>
 21. El-Din Mohammad, H., Alm, Elkelawy, M., and Yu-Sheng, Z. "HCCI engines combustion of CNG fuel with DME and H₂ additives", *SAE Technical Paper*, **22** (2010).
<https://doi.org/10.4271/2010-01-1473>
 22. Yu, J., Yu-Sheng, Z., Elkelawy, M., et al. "Spray and combustion characteristics of HCCI engine using DME/Diesel blended fuel by port-injection", *SAE Technical Paper*, **2010**, 1485 (2010).
<https://doi.org/10.4271/2010-01-1485>
 23. T, S.R., NB, G., and S, R., "Parametric analysis of thermal behavior of the building with phase change materials for passive cooling", *Energy Sources Part A-Recovery Utilization and Environmental Effects*, **44**(3), pp. 5627-5639 (2022).
<https://doi.org/10.1080/15567036.2021.1910752>
 24. Lawag, R.A. and Ali, H.M. "Phase change materials for thermal management and energy storage: A review", *Journal of Energy Storage*, **55**(C), 105602 (2022).
<https://doi.org/10.1016/j.est.2022.105602>
 25. Ali, H.M. "An experimental study for thermal management using hybrid heat sinks based on organic phase change material, copper foam and heat pipe", *Journal of Energy Storage*, **53**, 105185 (2022).
<https://doi.org/10.1016/j.est.2022.105185>
 26. Zhang, Y., Wang, J., Yang, X., et al. "Fabrication of shape-stabilized phase change materials based on waste plastics for energy storage", *Journal of Energy Storage*, **53**, 104973 (2022).
<https://doi.org/10.1016/j.est.2022.104973>
 27. Wang, Z., Du, G., Li, Z., et al. "Study on the combustion characteristics of a high compression ratio HCCI engine fuelled with natural gas", *Fuel*, **255**, 115701 (2019).
<https://doi.org/10.1016/j.fuel.2019.115701>
 28. Elkelawy, M., Bastwassi, H., Chandra Sekar, S., et al. "Numerical and experimental investigation of ethyl alcohol as oxygenator on the combustion, performance, and emission characteristics of diesel/cotton seed oil blends in homogenous charge compression ignition engine", *SAE Technical Paper Series*, 1680 (2018).
<https://doi.org/10.4271/2018-01-1680>
 29. Solmaz, H., Alper, C., Emre, Y., et al. "Evaluation of MWCNT as fuel additive to diesel-biodiesel blend in a direct injection diesel engine", *Biofuels*, **14**(13), pp.1-10 (2022).
<https://doi.org/10.1080/17597269.2022.2122154>
 30. Singh, A.P. and Agarwal, A.K. "Combustion characteristics of diesel HCCI engine: an experimental investigation using external mixture formation technique", *Applied Energy*, **99**, pp. 116-125 (2012).
<https://doi.org/10.1016/j.apenergy.2012.03.060>
 31. Jeon, J. and Bae, C. "The effects of hydrogen addition on engine power and emission in DME premixed charge compression ignition engine", *International Journal of Hydrogen Energy*, **38**(1), pp. 265-273 (2013).
<https://doi.org/10.1016/j.ijhydene.2012.09.177>
 32. Elkelawy M., Yu-Sheng Z., Hagar A.E.-D., et al. "Challenging and future of Homogeneous Charge Compression Ignition (HCCI) engines: An advanced and novel concepts review", *Journal of Power and Energy Systems*, **2**(4), pp. 1108-1119 (2008).
<https://doi.org/10.1299/jpes.2.1108>
 33. Jain, A., Singh, A.P., and Agarwal, A.K. "Effect of fuel injection parameters on combustion stability and emissions of a mineral diesel fuelled partially Premixed Charge Compression Ignition (PCCI) engine", *Applied energy*, **190**, pp. 658-669 (2017).
<https://doi.org/10.1016/j.apenergy.2016.12.164>
 34. Shim, E., Park, H., and Bae, C. "Intake air strategy for low HC and CO emissions in dual-fuel (CNG-diesel) premixed charge compression ignition engine", *Applied Energy*, **225**, pp.1068-1077 (2018).
<https://doi.org/10.1016/j.apenergy.2018.05.060>
 35. Bhawe, N.A., Gupta, M.M., and Joshi, S.S. "Effect of oxy hydrogen gas addition on combustion, performance, and emissions of premixed charge compression ignition engine", *Fuel Processing Technology*, **227**, 107098 (2022).
<https://doi.org/10.1016/j.fuproc.2021.107098>
 36. Srihari, S., Thirumalini, S., and Prashanth, K. "An experimental study on the performance and emission characteristics of PCCI-DI engine fuelled with diethyl ether-biodiesel-diesel blends", *Renewable Energy*, **107**, pp. 440-447 (2017).
<https://doi.org/10.1016/j.renene.2017.01.015>
 37. Alemayehu, G., Firew, D., Nallamotheu, R.B., et al. "PCCI Combustion for Better Emissions in Diesel Engines", *Recent Advances in Sustainable Technologies, Lecture Notes in Mechanical Engineering, Springer, Singapore*, pp. 183-194 (2021).
https://doi.org/10.1007/978-981-16-0976-3_17
 38. Shim, E., Park, H., and Bae, C. "Comparisons of advanced combustion technologies (HCCI, PCCI, and dual-fuel PCCI) on engine performance and emission characteristics in a heavy-duty diesel engine", *Fuel*, **262**, 116436 (2020).
<https://doi.org/10.1016/j.fuel.2019.116436>
 39. Elzahaby, A.M., Elkelawy, M., Bastawissi, H.A.-E., et al. "Kinetic modelling and experimental study on the

- combustion, performance and emission characteristics of a PCCI engine fuelled with ethanol-diesel blends", *Egyptian Journal of Petroleum*, **27**(4), pp. 927-937 (2018).
<https://doi.org/10.1016/j.ejpe.2018.02.003>
40. Muruga Nachippanan, N., Parthasarathy, M., Elumalai, P.V., et al. "Experimental assessment on characteristics of premixed charge compression ignition engine fuelled with multi-walled carbon nanotube-included Tamanu methyl ester", *Fuel*, **323**, 124415 (2022).
<https://doi.org/10.1016/j.fuel.2022.124415>
 41. Ramachandran, E., Krishnaiah, R., Perumal Venkatesan, E., et al., "Experimental investigation on the PCCI engine fuelled by algal biodiesel blend with CuO nanocatalyst additive and optimization of fuel combination for improved performance and reduced emissions at various load conditions by RSM technique", *ACS Omega*, **8**(8), pp. 8019-8033 (2023).
<https://doi.org/10.1021/acsomega.2c07882>
 42. Ramachandran, E., Krishnaiah, R., Venkatesan, E.P., et al. "Experimental investigation for determining an ideal algal biodiesel-diesel blend to improve the performance and mitigate emissions using a response surface methodology", *ACS Omega*, **8**(10), pp. 9187-9197 (2023).
<https://doi.org/10.1021/acsomega.2c07104>
 43. Charitha, V., Thirumalini, S., Prasad, M., et al. "Investigation on performance and emissions of RCCI dual fuel combustion on diesel-bio diesel in a light duty engine", *Renewable Energy*, **134**, pp. 1081-1088 (2019).
<https://doi.org/10.1016/j.renene.2018.09.048>
 44. Elkelawy, M., Bastawissi, H.A.-E., El Shenawy, E.A., et al. "Influence of lean premixed ratio of PCCI-DI engine fuelled by diesel/biodiesel blends on combustion. performance, and emission attributes: a comparison study", *Energy Conversion and Management*, **10**, 100066 (2021).
<https://doi.org/10.1016/j.ecmx.2020.100066>
 45. Yang, B., Duan, Q., Liu, B., et al. "Parametric investigation of low-pressure dual-fuel direct injection on the combustion performance and emissions characteristics in a RCCI engine fuelled with diesel and CH₄", *Fuel*, **260**, 116408 (2020).
<https://doi.org/10.1016/j.fuel.2019.116408>
 46. Sajjad, U., Hussain, I., Hamid, K., et al. "Liquid-to-vapor phase change heat transfer evaluation and parameter sensitivity analysis of nanoporous surface coatings", *International Journal of Heat and Mass Transfer*, **194**, 123088 (2022).
<https://doi.org/10.1016/j.ijheatmasstransfer.2022.123088>
 47. Paykani, A., Kakaee, A.H., Rahnama, P., et al. "Progress and recent trends in reactivity-controlled compression ignition engines", *International Journal of Engine Research*, **17**(5), pp. 481-524 (2016).
<https://doi.org/10.1177/1468087415593013>
 48. Zhu, P., Yan, H., Zhou, J., et al. "Surface integrity and transmission performance of spiral bevel gears subjected to shot peening: A comparison between concave and convex surfaces", *Surface and Coatings Technology*, **445**, 128675 (2022).
<https://doi.org/10.1016/j.surfcoat.2022.128675>
 49. Stanglmaier, R.H. and Roberts, C.E. "Homogeneous Charge Compression Ignition (HCCI): Benefits, compromises, and future engine applications". *SAE Technical Paper* (1999).
<https://doi.org/10.4271/PT-100>
 50. Singh, A.P. and Agarwal, A.K. "Low-temperature combustion: an advanced technology for internal combustion engines", *Advances in Internal Combustion Engine Research*, pp. 9-41 (2018).
https://doi.org/10.1007/978-981-10-7575-9_2
 51. Dimitriou, P., Tsujimura, T., and Suzuki, Y. "Low-load hydrogen-diesel dual-fuel engine operation—A combustion efficiency improvement approach", *International Journal of Hydrogen Energy*, **44**(31), pp. 17048-17060 (2019).
<https://doi.org/10.4271/2015-01-1939>
 52. Atmanli, A. and Yilmaz, N. "An experimental assessment on semi-low temperature combustion using waste oil biodiesel/C3-C5 alcohol blends in a diesel engine". *Fuel*, **260**, 116357 (2020).
<https://doi.org/10.1016/j.fuel.2019.116357>
 53. Ghaffarzadeh, S., Toosi, A.N., and Hosseini, V. "An experimental study on low temperature combustion in a light duty engine fuelled with diesel/CNG and biodiesel/CNG". *Fuel*, **262**, 116495 (2020).
<https://doi.org/10.1016/j.fuel.2019.116495>
 54. Alagumalai, A. "Reduced smoke and nitrogen oxide emissions during low-temperature combustion of ethanol and waste cooking oil", *Environmental Chemistry Letters*, **18**(2), pp. 511-516 (2020).
<https://doi.org/10.1007/s10311-019-00954-1>
 55. Singh, A.P., Kumar, V., and Agarwal, A.K. "Evaluation of reactivity-controlled compression ignition mode combustion engine using mineral diesel/gasoline fuel pair", *Fuel*, **301**, 120986 (2021).
<https://doi.org/10.1016/j.fuel.2021.120986>
 56. Jain, A., Singh, A.P., and Agarwal, A.K. "Effect of fuel injection parameters on combustion stability and emissions of a mineral diesel fuelled partially Premixed Charge Compression Ignition (PCCI) engine", *Applied Energy*, **190**, pp. 658-669 (2017).
<https://doi.org/10.1016/j.apenergy.2016.12.164>
 57. Shim, E., Park, H., and Bae, C. "Intake air strategy for low HC and CO emissions in dual-fuel (CNG-diesel) premixed charge compression ignition engine", *Applied Energy*, **225**, pp. 1068-1077 (2018).
<https://doi.org/10.1016/j.apenergy.2018.05.060>

58. Elkelawy, M., El Shenawy, E.A. Sherif Mohamed, A., et al. "Impacts of EGR on RCCI engines management: A comprehensive review", *Energy Conversion and Management*, **14**, 100216 (2022).
<https://doi.org/10.1016/j.ecmx.2022.100216>
59. Eldon, R. and Ravi, K. "Strategy to reduce carbon emissions by adopting Algal biodiesel in RCCI engine and optimize the fuel concoction using RSM methodology", *International Journal of Hydrogen Energy*, **47**(94), pp. 39701-39718 (2022).
<https://doi.org/10.1016/j.ijhydene.2022.09.169>
60. Karvounis, P., Gerasimos, T., Vlaskos, I., et al. "Methanol combustion characteristics in compression ignition engines: A critical review", *Energies*, **16**(24), 8069 (2023).
<https://doi.org/10.3390/en16248069>
61. Reşitoğlu, İ.A., Altinişik, K., and Keskin, A. "The pollutant emissions from diesel-engine vehicles and exhaust aftertreatment systems", *Clean Technologies and Environmental Policy*, **17**(1), pp. 15-27 (2015).
<https://doi.org/10.1007/s10098-014-0793-9>
62. Boningari, T. and Smirniotis, P.G. "Impact of nitrogen oxides on the environment and human health: Mn-based materials for the NO_x abatement", *Current Opinion in Chemical Engineering*, **13**, pp. 133-141 (2016).
<https://doi.org/10.1016/j.coche.2016.09.004>
63. Pénard-Morand, C. and Annesi-Maesano, I. "Air pollution: From sources of emissions to health effects", *Breathe*, **1**(2), pp. 108-119 (2004).
<https://doi.org/10.1183/18106838.0102.108>
64. Ranasinghe, K., Guan, K., Gardi, A., et al. "Review of advanced low-emission technologies for sustainable aviation", *Energy*, **188**, 115945 (2019).
<https://doi.org/10.1016/j.energy.2019.115945>
65. Dempsey, A.B., Walker, N.R., and Reitz, R. "Effect of piston bowl geometry on dual fuel Reactivity-Controlled Compression Ignition (RCCI) in a light-duty engine operated with gasoline/diesel and methanol/diesel", *SAE International Journal of Engines*, **6**(1), pp. 78-100 (2013).
<https://doi.org/10.4271/2013-01-0264>
66. Zou, X., Wang, H., Zheng, Z., et al. "Numerical study of the RCCI combustion processes fuelled with methanol, ethanol, n-butanol and diesel", *SAE Technical Paper*, 0777 (2016).
<https://doi.org/10.4271/2016-01-0777>
67. Li, J., Yang, W., and Zhou, D. "Review on the management of RCCI engines", *Renewable and Sustainable Energy Reviews*, **69**, pp. 65-79 (2017).
<https://doi.org/10.1016/j.rser.2016.11.159>
68. Panda, K. and Ramesh, A. "Parametric investigations to establish the potential of methanol based RCCI engine and comparison with the conventional dual fuel mode". *Fuel*, **308**, 122025 (2022).
<https://doi.org/10.1016/j.fuel.2021.122025>
69. Doddamani, D. and Sharanappa, P.E. "Influence of nano cerium oxide in emission reduction with methyl tert-butyl ether - gasoline blends at HCCI engine", *International Journal of Renewable Energy Research*, **13**(1), pp.1-14 (2023).

Biographies

Muthusamy Subramiam Kumaravel is an esteemed Associate Professor in the Department of Mechanical Engineering at Sri Jayaram Institute of Engineering and Technology, located in Chennai, India. With an unwavering commitment to academic excellence, he has played a vital role in shaping the future of aspiring engineers. Having completed his doctoral studies in Mechanical Engineering from a prestigious institution, he brings a wealth of knowledge and experience to the academic community. He is widely recognized for his significant contributions to the field, particularly in the area of Internal Combustion (IC) engines, thermal engineering and alternate fuels.

Tharmarajapandian Surulivel Rajan is an esteemed Associate Professor in the Department of Mechanical Engineering at Prince Shri Venkateshwara Padmavathy Engineering College, located in Chennai, India. With a passion for 19 years of teaching and research experience, he has made significant contributions to the field of mechanical engineering. He earned his doctoral degree in Mechanical Engineering from a renowned institution, where his research focused on Phase change materials. With a commitment to academic excellence, he has dedicated his career to educating and mentoring students in the field of mechanical engineering. His teaching philosophy emphasizes a practical approach, encouraging students to apply theoretical concepts to real-world challenges. His engaging lectures and hands-on demonstrations have inspired countless students to explore the diverse and dynamic aspects of mechanical engineering.

Natarajan Alagumurthi is a distinguished Professor in the Department of Mechanical Engineering at Pondicherry Engineering College, located in Pondicherry, India. With a strong passion for academic excellence and a dedication to advancing the field of mechanical engineering, he has made significant contributions to both research and education. He earned his doctoral degree in Mechanical Engineering from a reputable institution, focusing his research on combustion in IC engines, automobile engineering and thermal engineering.

Palaniappan Thangavel is a distinguished Professor in the Department of Mechanical Engineering at Shree Venkateshwara Hi-Tech Engineering College, located in Erode, India. With a profound dedication to academic excellence and an unwavering commitment to the field of mechanical engineering, he has significantly contributed to both research and education. He obtained his doctoral degree in Mechanical Engineering from a prestigious institution,

focusing his research on IC engines. He is widely recognized for his exceptional teaching abilities and his ability to inspire students to explore the complexities of mechanical engineering. His teaching methodology emphasizes practical applications, providing students with the necessary tools to apply theoretical concepts to real-world challenges. His mentorship has led many of his students to excel in their academic pursuits and professional careers.

Kuppusamy Raja is an accomplished Assistant Professor in the Department of Mechanical Engineering at Sri Jayaram Institute of Engineering and Technology, located in Chennai, India. With a strong passion for education and a commitment

to fostering academic growth, he has contributed significantly to the field of mechanical engineering. With a solid educational foundation, he completed his doctoral studies in Mechanical Engineering, focusing his research on IC engines. His expertise in this area has allowed him to contribute valuable insights to the industry and academia. He is recognized for his exceptional teaching abilities and his dedication to guiding and mentoring students. His teaching methodology combines theoretical knowledge with practical applications, providing students with a comprehensive understanding of the intricacies of mechanical engineering. His dedication to his students' success has inspired many to pursue careers in the field.