Sharif University of Technology

Scientia Iranica

Transactions on Industrial Engineering

https://scientiairanica.sharif.edu

A modified Russell measure for estimating efficiency changes in the presence of the undesirable outputs and stochastic data

Seyedeh Sara Hosseini [a], Reza Farzipoor Saen [b,*], Reza Kazemi Matin [c]

a. Department of Mathematics, Islamic Azad University, Qazvin Branch, Qazvin, Iran.
b. Department of Operations Management and Business Statistics, College of Economics and Political Science, Sultan Qaboos University, Muscat, Oman.
c. Department of Mathematics, College of Science, Sultan Qaboos University, Muscat, Oman.

* Corresponding author: farzipour@yahoo.com (R. Farzipoor Saen)

Received 5 April 2021; Received in revised form 8 July 2021; Accepted 8 November 2021

Keywords

Data Envelopment Analysis (DEA);
Stochastic data;
Undesirable outputs;
Modified Russell Measure (MRM);
Global Malmquist Productivity Index (GMPI).

Abstract

Although Data Envelopment Analysis (DEA) assumes deterministic data, a great volume of data might be stochastic. The Global Malmquist Productivity Index (GMPI) is a highly effective instrument for productivity analysis in DEA. This paper extends GMPI in the presence of stochastic data. Our new stochastic DEA model is a Chance-Constrained Programming (CCP) model, which is converted to a deterministic programming problem with a linear objective function and quadratic constraints. For efficiency evaluation purposes, in this paper, the weak disposability principle is used to model Russell's measure in the presence of undesirable outputs. The main contribution of this paper is to develop a global Russell model with stochastic data. A case study is presented to illustrate the applicability of the proposed models.

1. Introduction

Data Envelopment Analysis (DEA), developed by Charnes et al. [1], is a rigorous mathematical programming tool for evaluating the relative performance of Decision-Making Units (DMUs). In this technique, multiple inputs and outputs are fed into some mathematical programming models for analysis. DEA has been widely applied in many different fields (e.g. [2-12]).

The standard DEA models stress technical efficiency measurement by utilizing radial measures, which are gauged in proportion to input/output isoquant by searching for the maximal reduction/expansion in all input/outputs of DMU that are likely feasible for a given output/output vector. Basic DEA models draw on several mild assumptions in terms of production possibility sets and production functions.

In production economics, it is important to estimate the Efficiency Changes (EC) of a production unit in different periods and determine the regress and progress of production systems. Caves et al. [13], first, proposed a Malmquist Productivity Index (MPI) as a highly effective instrument for efficiency analysis in DEA. Färe et al. [14] combined the technical efficiency measurement with the efficiency measurement idea of Caves et al. [13] and decomposed it into EC and Technical Change (TC) components. MPI has many successful practical applications (e.g. [15-18]).

Chen and Golley [19] modified MPI to measure environmental efficiency growth. Luenberger [20,21] presented Malmquist–Luenberger (ML) productivity index to incorporate the notions of the MPI and Directional Distance Function (DDF). However, the ML index might be infeasible (Pastor and Lovell [22]). Some solutions have been proposed to overcome this problem. Shestalova [23] proposed a Sequential Malmquist–Luenberger (SML) index to combine the concepts of successive sequential reference production sets and DDF. SML index has been utilized in some studies like Oh and Heshmati [24], Oh and Lee [25], Wang and Lan [26]. Molinos et al. [27] examined the Luenberger productivity

To cite this article:
S.S. Hosseini, R. Farzipoor Saen, R. Kazemi Matin "A modified Russell measure for estimating efficiency changes in the presence of the undesirable outputs and stochastic data", *Scientia Iranica* (2025) **32**(12): 5538. https://doi.org/10.24200/sci.2021.58051.5538

2345-3605 © 2025 Sharif University of Technology. This is an open access article under the CC BY-NC-ND license.

indicator in the water industry. Oh and Lee [25] introduced the metafrontier Malmquist productivity growth index to deal with the group heterogeneity, which was used by O'Donnell et al. [28] for calculating technical gaps and the efficiency of the agriculture sector. Portela and Thanassoulis [29] described a meta-Malmquist index to measure efficiency. Pastor and Lovell [22] introduced Global MPI (GMPI) that does not suffer from the infeasibility issue. Likewise, Färe and Grosskopf [30] and Oh [31] employed the global ML productivity index in their studies. Maniadakis and Thanassoulis [32] proposed the cost Malmquist index that is decomposed to Technical Efficiency Change (TEC), Allocative Efficiency Change (AEC), TC, and Price Effect (PE) components. A global profit MPI was developed by Tohidi et al. [33,34], which can be utilized once input and output prices are available and can be decomposed into several components. Furthermore, Tohidi and Razavyan [35] introduced the convex combination of the inputs' costs for various periods. Emrouznejad and Yang [18] proposed an ML index based on a Range Adjusted Measure (RAM) model to avoid the infeasibility issue.

In the real world, there might be undesirable outputs such as pollutions and CO_2 emissions (Färe et al. [36], Arabi et al. [37]). Intuitively, if inputs are freely available, reducing bad outputs depends on desirable outputs. In economics, this feature is referred to as weak disposable technology (Kuosmanen [38]). Shephard [39] was the first to propose the weak disposability principle between good and bad outputs. This issue was extended by Hailu and Veeman [40], Scheel [41], and Kuosmanen and Podinovski [42].

Kuosmanen [38] discussed that the desirable and undesirable outputs are dependent on each other. Kuosmanen and Podinovski [42] showed that the technology proposed by Kuosmanen [38] is free from the convexity contravention problem and it provides a correct technology for modeling undesirable outputs under weak disposability assumption. They demonstrated that this correct technology is the smallest technology, which confirms the principles of convexity, free disposability inputs and desirable outputs, and weak disposability of undesirable outputs.

Azadi and Farzipoor Saen [43] proposed a deterministic version of the stochastic model in the presence of undesirable outputs. Momeni and Farzipoor Saen [44] developed a Russell chance-constrained DEA model to help decision-makers to identify suitable third-party reverse logistics providers. Skevas et al. [45] determined the technical inefficiency and pesticides' environmental inefficiency of farms using the Russell model in the presence of undesirable inputs and outputs. Tavana et al. [46] developed DEA adaptations of a robust cross-efficiency approach to rank DMUs in the existence of uncertain data and undesirable outputs. Chen and Golley [19] proposed an enhanced Russell-based DDF model for dealing with undesirable outputs in the presence of zero data. Zare Haghighi and Rostamy-Malkhalifeh [47] suggested an Enhanced Russell Measure (ERM) to consider the undesirable outputs. Wu et al. [48] developed a fuzzy ERM to analyze the undesirable outputs. Jamshidi et al. [49] studied the Russell model given the chance-constrained technique.

Cooper et al. [50] developed the Chance-Constrained Programming (CCP) DEA model. Then, Cooper et al. [51,52] extended the CCP model and applied it in different applications. Azadi and Farzipoor Saen [53] introduced a chance-constrained DEA model to select suppliers with non-discretionary factors and stochastic data. They developed a chance-constrained DEA model. Azadi and Farzipoor Saen [54] introduced a chance-constrained integer DEA model for evaluating production units. There are other related papers that readers can study (e.g., [55-61]).

To the best of our knowledge, there is no study on assessing efficiency with stochastic data using GMPI. The objective of this paper is to develop a global Russell model under weak disposable technology in the presence of stochastic data and undesirable outputs. In summary, the contributions of this paper are as below:

- For the first time, a global Russell model with stochastic data is developed;
- The proposed model can deal with stochastic data;
- The proposed model inspects the criteria to improve GMPI and recommends practical solutions;
- A case study is presented.

This study is organized as follows: Section 2 briefly reviews the weak disposable technologies, Russell Measure (RM) model with undesirable outputs, and the Global Malmquist Index (GMI). Section 3, assuming weak disposable technology, presents a new GMPI based upon the Modified Russell Measure (MRM) model in the presence of stochastic data and undesirable outputs. A case study is given in Section 4. Section 5 concludes the paper.

2. Preliminaries

2.1. Mathematical notations

DMU_o	The DMU under evaluation
x_{nK}	The nth input of kth DMU
v_{mK}	The mth good output of kth DMU
w_{jK}	The jth bad output of kth DMU
$\tilde{x}_{nk}^{T}$	The nth stochastic input of kth DMU in period $T \in \{t,\ t+1\}$
$\tilde{v}_{mk}^{T}$	The mth good stochastic output of kth DMU in period $T \in \{t,\ t+1\}$
$\tilde{w}_{jk}^{T}$	The jth bad stochastic output of kth DMU in period $T \in \{t,\ t+1\}$
Φ	The normal cumulative distribution function
Φ^{-1}	The inverse of a normal cumulative distribution function
$(\omega)^{s}$	The variance and covariance of inputs in period $s \in \{t,\ t+1\}$
σ_n^I	The standard deviation of nth input
σ_m^o	The standard deviation of mth good output
θ_n	The distinct abatement factors of nth input
φ_m	The distinct abatement factors of mth good output
ψ_j	The distinct abatement factors of jth bad output
λ_k	A portion of the intensity weight of DMU_k
μ_k	A portion of the intensity weight of DMU_k

2.2. Weak disposable technology

The common definition of production technology is the set $T = \{(\mathbf{x},\mathbf{v},\mathbf{w}) \mid \mathbf{x} \text{ can produce } (\mathbf{v},\mathbf{w})\}$. The output is de-

fined as $P(x)=\{(\mathbf{v},\mathbf{w})\,|\,(\mathbf{x},\mathbf{v},\mathbf{w})\in T\}$. If proportional reductions of feasible outputs are feasible, then the outputs are weakly disposable. If $(\boldsymbol{v},\boldsymbol{w})\in P(x)$ and $0\le\theta\le 1$ then $(\theta\boldsymbol{v},\theta\boldsymbol{w})\in P(x)$. For example, a power plant should reduce electricity production to reduce CO_2 emissions.

Assume that there are K DMUs in which DMU_k, $k\in\{1,\ldots,K\}$ is determined by a vector $(\boldsymbol{x_k},\boldsymbol{v_k},\boldsymbol{w_k})$, where:

$$\mathbf{X}_k=(x_{1k},x_{2k},...,x_{Nk})\in R^N,\ \mathbf{x}_k\ge\mathbf{0},\ \mathbf{x}_k\ne\mathbf{0}$$

shows the vector of inputs:

$$\mathbf{V}_k=(v_{1k},v_{2k},...,v_{Mk})\in R^M,\ \mathbf{v}_k\ge\mathbf{0},\ \mathbf{v}_k\ne\mathbf{0}$$

is the vector of desirable outputs and,

$$\mathbf{w}_k=(w_{1k},w_{2k},...,w_{Jk})\in R^J,\ \mathbf{w}_k\ge\mathbf{0},\ \mathbf{w}_k\ne\mathbf{0}$$

is the vector of undesirable outputs.

Axioms of observations inclusion, convexity, and variants of disposability (free or weak) can be introduced to form the production technology (Sueyoshi and Goto [62]). In modeling the undesirable outputs, Shephard [39] assumes weak disposability, which implies that any proportional reduction in undesirable outputs needs the same reduction in desirable outputs. Shephard [39] applied a single abatement factor to model weak disposability. (T_s) is defined as follows:

$$T_s=\{(\mathbf{x},\mathbf{v},\mathbf{w})\,|\sum_{k=1}^{K}z_k\mathbf{x}_k\le\mathbf{x},\ \sum_{k=1}^{K}\theta\,z_k\mathbf{v}_k\ge\mathbf{v},\sum_{k=1}^{K}\theta z_k\mathbf{w}_k=\mathbf{w},$$

$$\sum_{k=1}^{K}z_k=1,\ z_k\ge 0,\ 0\le\theta 1,\ (k=1,...,K)\}. \tag{1}$$

However, Kuosmanen [38] presented minimum extrapolation technology for modeling Shephard's definition and used distinct abatement factors, $\theta_k,(k\in\{1,\ldots,K\})$, for any DMU. Assuming the Variable Returns to Scale (VRS), the following technology (T_k) is presented:

$$T_k=\{(\mathbf{x},\mathbf{v},\mathbf{w})\,|\sum_{k=1}^{K}z_k\mathbf{x}_k\le\mathbf{x},$$

$$\sum_{k=1}^{K}\theta_k z_k\mathbf{v}_k\ge\mathbf{v},\ \sum_{k=1}^{K}\theta_k z_k\mathbf{w}_k=\mathbf{w},$$

$$\sum_{k=1}^{K}z_k=1,\ z_k\ge 0,\ \ 0\le\theta_k\le 1,\ (k=1,...,K)\}, \tag{2}$$

where z_k is the intensity variable. Since T_s and T_k are nonlinear, Kuosmanen and Podinovski's [42] approach is applicable for the choice of abatement factors. They showed that the Shephard technology is not convex and cannot be linearized (Kuosmanen [38]). Regarding the weak disposability, Expression (2) introduces an abatement factor θ_k that scales down both good and bad outputs. It is shown that the technology is convex and can be linearized using the following variable substitution:

$$z_k=\underbrace{\theta_k z_k}_{\lambda_k}+\underbrace{(1-\theta_k)(z_k)}_{\mu_k}.$$

The intensity weight of DMU_k has two parts, including λ_k and μ_k. The λ_k is a portion of the output of DMU_k, which is active (Kuosmanen [38]). The $\mu_k$is a portion of the output of DMU_k that is reduced by scaling down the activity level. Using the two components, the technology is defined as follows:

$$T_k=\{(\mathbf{x},\mathbf{v},\mathbf{w})\,|\sum_{k=1}^{K}(\lambda_k+\mu_k)\mathbf{x}_k\le\mathbf{x}\ ,$$

$$\sum_{k=1}^{K}\lambda_k\,\mathbf{v}_k\ge\mathbf{v}\ ,\ \sum_{k=1}^{K}\lambda_k\,\mathbf{w}_k=\mathbf{w}\ , \tag{3}$$

$$\sum_{k=1}^{K}(\lambda_k+\mu_k)=1,\ \lambda_k\ge 0,\ \mu_k\ge 0,\ (k=1,...,K)\}.$$

2.3. Russell efficiency measure with undesirable outputs

RM model is a non-radial measure to assess the performance of DMUs. Cooper et al. [52] introduced the ERM model. ERM can be best described as the ratio of the average efficiency of inputs to the outputs' efficiency. A brief review of ERM in different fields is given by Hsiao et al. [63], Lozano et al. [64], and Levkoff et al. [65].

Wang et al. [66] proposed fuzzy ERM and ranked DMUs. Esmaeili [67] developed an ERM model with interval data. Azadi and Farzipoor Saen [43] identified the most efficient suppliers with undesirable items and stochastic data in ERM. Skevas et al. [45] used a bootstrap method to discuss the performance of farmers by providing the effect of stochastic data on products. Zare Haghighi and Rostamy-Malkhalifeh [47] presented an RM to consider both the desirable and undesirable outputs. Wu et al. [48] developed a fuzzy ERM model to estimate the environmental efficiency of thermal power plants in the presence of undesirable outputs. Izadikhah et al. [58] developed a network DEA model to cope with stochastic data.

In this paper, an MRM is presented to calculate the performance of DMUs by taking the desirable and undesirable outputs into account. Suppose that there are K DMUs $(k=1,\ldots,K)$ with N inputs $(n=1,\ldots,N)$, M desirable outputs $(m=1,\ldots,M)$, and J $(j=1,\ldots,J)$ undesirable outputs. Chen et al. [68] presented a version of the Weighted Russell Directional Distance Model (WRDDM) and showed that the directional distance models with slacks are special cases of slack-based WRDDM. Chen et al. [69] extended Russell's measure to include the undesirable outputs, which is based on WRDDM. Their proposed model measures the inefficiency of inputs, desirable and undesirable outputs, and overall inefficiencies. Employing technology (3), the following model is presented:

$$D(\mathbf{x},\mathbf{v},\mathbf{w})=\max\sum_{n=1}^{N}\theta_n+\sum_{m=1}^{M}\varphi_m+\sum_{j=1}^{J}\psi_j,$$

s.t.,

$$\sum_{k=1}^{K}(\lambda_k+\mu_k)x_{nk}\le(1-\theta_n)\,x_{no}\qquad(n=1,...,N\ ),$$

$$\sum_{k=1}^{K}\lambda_k v_{mk}\ge(1+\varphi_m)\,v_{mo}\qquad(m=1,...,M\ ),$$

$$\sum_{k=1}^{K}\lambda_k w_{jk}=(1-\psi_j)\,w_{jo}\qquad(j=1,...,J\ ),$$

$$\sum_{k=1}^{K}(\lambda_k+\mu_k)=1,\ \lambda_k\geq 0,\ \mu_k\geq 0\quad (k=1,...,K),$$
$$0\leq\theta_n\quad (n=1,...,N),$$
$$0\leq\varphi_m\quad (m=1,...,M),$$
$$0\leq\psi_j\quad (j=1,...,J). \tag{4}$$

In Model (4), DMU_o is the DMU under evaluation. The non-negative constraints $0\leq\theta_n,\varphi_m,\psi_j$ imply a potential improvement in the criteria of DMU_o in T_K and ERM lies between zero and unity (Zare Haghighi and Rostamy-Malkhalifeh [47]).

2.4. GMPI

The MPI is a useful and widely used tool to evaluate the efficiency in different periods and identifies the regress and progress of the DMUs during periods. Färe et al. [14] analyzed the MPI based on technology and efficiency variations. Yao et al. [70] and Aparicio et al. [71] introduced the cost-based MPI. Chen and Golley [19] modified the MPI and applied it to the DDF model. The MPI has been used in different settings (e.g., Nakano and Managi [72]; Sueyoshi and Goto [73]; Zhang and Choi [74]). However, MPI suffers from the infeasibility issue. Pastor and Lovell [22] proposed the GMI and Oh [31] used the ML index to overcome the infeasibility problem. Tohidi et al. [33] proposed a global profit Malmquist index, which is based on the cost MPI. Maniadakis and Thanassoulis [32] introduced MPI to determine the EC when cost and price are accessible. Giménez et al. [75] used the global ML index for dynamic analysis of the results in the presence of undesirable products.

Chung et al. [76] presented an ML productivity index to deal with the undesirable outputs. The following ML productivity index is defined as follows:

$$ML^t(\mathbf{x}^t,\mathbf{v}^t,\mathbf{w}^t)=\frac{1+D^t(\mathbf{x}^t,\mathbf{v}^t,\mathbf{w}^t)}{1+D^t(\mathbf{x}^{t+1},\mathbf{v}^{t+1},\mathbf{w}^{t+1})},$$
$$ML^{t+1}(\mathbf{x}^{t+1},\mathbf{v}^{t+1},\mathbf{w}^{t+1})=\frac{1+D^{t+1}(\mathbf{x}^t,\mathbf{v}^t,\mathbf{w}^t)}{1+D^{t+1}(\mathbf{x}^{t+1},\mathbf{v}^{t+1},\mathbf{w}^{t+1})}, \tag{5}$$

where D is the distance function. $\boldsymbol{x}^t$ and $\boldsymbol{x}^{t+1}$ are the inputs of periods t and t+1. Also, $\boldsymbol{v}^t$, $\boldsymbol{v}^{t+1}$, $\boldsymbol{w}^t$, and $\boldsymbol{w}^{t+1}$ represent desirable output in period t, desirable output in period t+1, undesirable output in period t, and undesirable output in period t+1, respectively. The geometric means ML^t and ML^{t+1} are productivity changes between periods t and t+1, where $ML=\sqrt{ML^t\times ML^{t+1}}$.

To present our new GMPI, assuming weak disposability of outputs, the production set is as:

$P(\mathbf{x})=\{(\mathbf{v},\mathbf{w})\,|\,\mathbf{x}$. can produce $(\mathbf{v},\mathbf{w})\}$, By selecting the improvement direction $\boldsymbol{g}=(\boldsymbol{g}_x,\boldsymbol{g}_v,\boldsymbol{g}_w)$, $P_D(x)$ can be used for performance evaluation (Luenberger [20]):

$$D(\mathbf{x},\mathbf{v},\mathbf{w})=\max\{\rho\,|\,(\mathbf{x}-\rho g_x,\mathbf{v}+\rho g_v,\mathbf{w}-\rho g_w)\in P_D(\mathbf{x})\}. \tag{6}$$

Now, for $D(\mathbf{x},\mathbf{v},\mathbf{w})$, the GMPI for periods t and t+1 is defined as follows:

$$MLP^G(\mathbf{x}^t,\mathbf{v}^t,\mathbf{w}^t,\mathbf{x}^{t+1},\mathbf{v}^{t+1},\mathbf{w}^{t+1})=\frac{1+D^G(\mathbf{x}^t,\mathbf{v}^t,\mathbf{w}^t)}{1+D^G(\mathbf{x}^{t+1},\mathbf{v}^{t+1},\mathbf{w}^{t+1})}. \tag{7}$$

Note that the global technology set, $P_D^G(\boldsymbol{x})$, is formed by the same production principles. By considering all the observations of periods t and t + 1, $D^G(\boldsymbol{x}^t,\boldsymbol{v}^t,\boldsymbol{w}^t)$ denotes the DDF of the DMU in period t and $D^G(\boldsymbol{x}^{t+1},\boldsymbol{v}^{t+1},\boldsymbol{w}^{t+1})$ is associated with period t+1.

In Expression (7), if MLP^G is bigger than 1, it implies improvement in efficiency. If MLP^G is less than 1, it indicates a decline in efficiency (Giménez et al. [75]). For a given DDF measure, one can decompose Expression (7) into the components of efficiency growth, which is as follows:

$$\begin{aligned}
&MLP^G(\mathbf{x}^t,\mathbf{v}^t,\mathbf{w}^t,\mathbf{x}^{t+1},\mathbf{v}^{t+1},\mathbf{w}^{t+1})\\
&\quad=\frac{1+D^G(\mathbf{x}^t,\mathbf{v}^t,\mathbf{w}^t)}{1+D^G(\mathbf{x}^{t+1},\mathbf{v}^{t+1},\mathbf{w}^{t+1})}\\
&\quad=\frac{1+D^t(\mathbf{x}^t,\mathbf{v}^t,\mathbf{w}^t)}{1+D^{t+1}(\mathbf{x}^{t+1},\mathbf{v}^{t+1},\mathbf{w}^{t+1})}\\
&\times\left[\frac{(1+D^G(\mathbf{x}^t,\mathbf{v}^t,\mathbf{w}^t))/(1+D^t(\mathbf{x}^t,\mathbf{v}^t,\mathbf{w}^t))}{(1+D^G(\mathbf{x}^{t+1},\mathbf{v}^{t+1},\mathbf{w}^{t+1}))/(1+D^{t+1}(\mathbf{x}^{t+1},\mathbf{v}^{t+1},\mathbf{w}^{t+1}))}\right]\\
&\quad=\frac{TE^{t+1}(\mathbf{x}^{t+1},\mathbf{v}^{t+1},\mathbf{w}^{t+1})}{TE^t(\mathbf{x}^t,\mathbf{v}^t,\mathbf{w}^t)}\times\left[\frac{BPG^{t+1}(\mathbf{x}^{t+1},\mathbf{v}^{t+1},\mathbf{w}^{t+1})}{BPG^t(\mathbf{x}^t,\mathbf{v}^t,\mathbf{w}^t)}\right]\\
&\quad=EC^{t,t+1}\times BPC^{t,t+1},
\end{aligned} \tag{8}$$

where $EC^{t,t+1}$ represents the changes in technical efficiency or catching-up between periods t and t+1. If $EC^{t,t+1}>1$, then the technical efficiency is improved. If $EC^{t,t+1}<1$, then the technical efficiency is declined. The best practice gap ($BPG^{t,t+1}$) between a coexistent technology and a global technology frontier indicates the technological change in the corresponding periods.

In this paper, we formulate Model (4) based on the GMPI using weak disposable technology (T_K). Given the observations of periods t and t+1, $s\in\{t,t+1\}$, our new model is as follows:

$$D^G(\mathbf{x}^s,\mathbf{v}^s,\mathbf{w}^s)=\max\sum_{n=1}^{N}\theta_n+\sum_{m=1}^{M}\varphi_m+\sum_{j=1}^{J}\psi_j,$$

s.t.,

$$\sum_{T=t}^{t+1}\sum_{k=1}^{K}(\lambda_k+\mu_k)x_{nk}^T\leq(1-\theta_n)x_{no}^s\quad (n=1,...,N),$$
$$\sum_{T=t}^{t+1}\sum_{k=1}^{K}\lambda_k v_{mk}^T\geq(1+\varphi_m)v_{mo}^s\quad (m=1,...,M),$$
$$\sum_{T=t}^{t+1}\sum_{k=1}^{K}\lambda_k w_{jk}^T=(1-\psi_j)w_{jo}^s\quad (j=1,...,J),$$
$$\sum_{T=t}^{t+1}\sum_{k=1}^{K}(\lambda_k+\mu_k)=1,\ \lambda_k\geq 0,\ \mu_k\geq 0\quad (k=1,...,K),$$
$$0\leq\theta_n\quad (n=1,...,N),$$
$$0\leq\varphi_m\quad (m=1,...,M),$$
$$0\leq\psi_j\quad (j=1,...,J). \tag{9}$$

By solving Model (9), the GMPI under VRS assumption is as follows:

$$
\begin{aligned}
&MLP^G(\mathbf{x}^t,\mathbf{v}^t,\mathbf{w}^t,\mathbf{x}^{t+1},\mathbf{v}^{t+1},\mathbf{w}^{t+1})\\
&=\frac{1+D^G(\mathbf{x}^t,\mathbf{v}^t,\mathbf{w}^t)}{1+D^G(\mathbf{x}^{t+1},\mathbf{v}^{t+1},\mathbf{w}^{t+1})}\\
&=\frac{1+D^t(\mathbf{x}^t,\mathbf{v}^t,\mathbf{w}^t)}{1+D^{t+1}(\mathbf{x}^{t+1},\mathbf{v}^{t+1},\mathbf{w}^{t+1})}\\
&\times\left[\frac{(1+D^G(\mathbf{x}^t,\mathbf{v}^t,\mathbf{w}^t))/(1+D^t(\mathbf{x}^t,\mathbf{v}^t,\mathbf{w}^t))}{(1+D^G(\mathbf{x}^{t+1},\mathbf{v}^{t+1},\mathbf{w}^{t+1}))/(1+D^{t+1}(\mathbf{x}^{t+1},\mathbf{v}^{t+1},\mathbf{w}^{t+1}))}\right]\\
&=\frac{TE^{t+1}(\mathbf{x}^{t+1},\mathbf{v}^{t+1},\mathbf{w}^{t+1})}{TE^t(\mathbf{x}^t,\mathbf{v}^t,\mathbf{w}^t)}\times\left[\frac{BPG^{t+1}(\mathbf{x}^{t+1},\mathbf{v}^{t+1},\mathbf{w}^{t+1})}{BPG^t(\mathbf{x}^t,\mathbf{v}^t,\mathbf{w}^t)}\right]\\
&=EC^{t,t+1}\times BPC^{t,t+1}. \qquad (10)
\end{aligned}
$$

3. GMPI with stochastic data

Expression (10) assumes deterministic inputs and outputs. However, in many real-world applications, the data often involves uncertainty. Stochastic programming is one of the main approaches to deal with uncertainty. To deal with the stochastic data, Model (9) is extended.

Assuming known mean and variance and normal distribution of inputs and outputs, Cooper et al. [52] developed a chance-constrained DEA model. This technique can be converted to a deterministic equivalent by a quadratic optimization approach. Suppose that the inputs and outputs are random vectors in periods t and t+1.

$$
\begin{aligned}
&\tilde{\boldsymbol{x}}_k^t=(\tilde{x}_{1k}^t,\ldots,\tilde{x}_{Nk}^t),\\
&\tilde{\boldsymbol{v}}_k^t=(\tilde{v}_{1k}^t,\ldots,\tilde{v}_{Mk}^t),\\
&\tilde{\boldsymbol{w}}_k^t=(\tilde{w}_{1k}^t,\ldots,\tilde{w}_{Jk}^t),\\
&\tilde{\boldsymbol{x}}_k^{t+1}=(\tilde{x}_{1k}^{t+1},\ldots,\tilde{x}_{Nk}^{t+1}),\\
&\tilde{\boldsymbol{v}}_k^{t+1}=(\tilde{v}_{1k}^{t+1}.\ldots.\tilde{v}_{Mk}^{t+1}),\\
&\tilde{\boldsymbol{w}}_k^{t+1}=(\tilde{w}_{1k}^{t+1},\ldots,\tilde{w}_{Jk}^{t+1}).
\end{aligned}
$$

To calculate the GMPI, Model (9) is presented as the following chance-constrained optimization model:

$$
\begin{aligned}
&SD^G(\tilde{\mathbf{x}}^s,\tilde{\mathbf{v}}^s,\tilde{\mathbf{w}}^s)=\max\sum_{n=1}^{N}\theta_n+\sum_{m=1}^{M}\varphi_m+\sum_{j=1}^{J}\psi_j,\\
&\text{s.t.}\Pr\left\{\sum_{T=t}^{t+1}\sum_{k=1}^{K}(\lambda_k+\mu_k)\tilde{x}_{nk}^T+s_n=(1-\theta_n)\tilde{x}_{no}^s\right\}\geq 1-\alpha \qquad (n=1,\ldots,N),\\
&\Pr\left\{\sum_{T=t}^{t+1}\sum_{k=1}^{K}\lambda_k\tilde{v}_{mk}^T-s_m=(1+\varphi_m)\tilde{v}_{mo}^s\right\}\geq 1-\alpha \qquad (m=1,\ldots,M),\\
&\sum_{T=t}^{t+1}\sum_{k=1}^{K}\lambda_k\tilde{w}_{jk}^T=(1-\psi_j)\tilde{w}_{jo}^s \qquad (j=1,\ldots,J),\\
&\sum_{T=t}^{t+1}\sum_{k=1}^{K}(\lambda_k+\mu_k)=1,\ \lambda_k\geq 0,\ \mu_k\geq 0 \qquad (k=1,\ldots,K),\\
&0\leq\theta_n,\quad \varphi_m,\quad \psi_j,\quad s_n,\quad s_m\\
&(n=1,\ldots,N),\quad (m=1,\ldots,M),\quad (j=1,\ldots,J), \qquad (11)
\end{aligned}
$$

where Pr indicates "probability" and "~" represents a random variable with a normal distribution. The $\alpha\in(0,1]$ indicates the allowed chance of failure to satisfy the constraints. Also, $SD^G(\tilde{\boldsymbol{x}}^s,\tilde{\boldsymbol{v}}^s,\tilde{\boldsymbol{w}}^s)$ shows the stochastic modified Russell model based on the GMI.

Definition 1. DMU_o in Model (11) is stochastically efficient if and only if, in optimality, $SD^G=0$.

For stochastic data, it is assumed that all inputs and outputs are independent random variables. By applying the CCP approach in which the cumulative distribution function is denoted by Φ, it is possible to convert the chance-constrained Model (11) into a deterministic equivalent model. To this end, we proceed as follows:

Considering the constraint of good outputs in Model (11) as:

$$
\Pr\left\{\sum_{T=t}^{t+1}\sum_{k=1}^{K}\lambda_k\tilde{v}_{mk}^T\geq(1+\varphi_m)\tilde{v}_{mo}^s\right\}\geq 1-\alpha\ ,\qquad (m=1,\ldots,M)
$$

where $s\in\{t,t+1\}$. Using slack variable $s_m\geq 0$, the constraint can be stated as:

$$
\Pr\left\{\sum_{T=t}^{t+1}\sum_{k=1}^{K}\lambda_k\tilde{v}_{mk}^T-(1+\varphi_m)\tilde{v}_{mo}^s\geq s_m\right\}=1-\alpha.\ (m=1,\ldots,M)
$$

Now, by applying the definition of the expected value and variance of the elements, we write it as follows:

$$
\Pr\left\{\frac{\sum_{T=t}^{t+1}\sum_{k=1}^{K}\lambda_k\tilde{v}_{mk}^T-(1+\varphi_m)\tilde{v}_{mo}^s-E\left(\sum_{T=t}^{t+1}\sum_{k=1}^{K}\lambda_k\tilde{v}_{mk}^T-(1+\varphi_m)\tilde{v}_{mo}^s\right)}{\sqrt{Var\left(\sum_{T=t}^{t+1}\sum_{k=1}^{K}\lambda_k\tilde{v}_{mk}^T-(1+\varphi_m)\tilde{v}_{mo}^s\right)}}\leq\frac{s_m-E\left(\sum_{T=t}^{t+1}\sum_{k=1}^{K}\lambda_k\tilde{v}_{mk}^T-(1+\varphi_m)\tilde{v}_{mo}^s\right)}{\sqrt{Var\left(\sum_{T=t}^{t+1}\sum_{k=1}^{K}\lambda_k\tilde{v}_{mk}^T-(1+\varphi_m)\tilde{v}_{mo}^s\right)}}\right\}=\alpha.
$$

For simplicity, let $\sqrt{Var\left(\sum_{T=t}^{t+1}\sum_{k=1}^{K}\lambda_k\tilde{v}_{mk}^T-(1+\varphi_m)\tilde{v}_{mo}^s\right)}$ is denoted by $\sigma_m(\varphi_o,\lambda)$. Therefore, the following equation is shown in Box I.

Where $v_{mk}^T=E(\tilde{v}_{mk}^T)$ and $v_{mo}^s=E(\tilde{v}_{mo}^s)$. By denoting the left-hand side of the above inequality by z, we note that it has a normal standard distribution with zero mean and unit variance. Then, we can write:

$$
\Pr\left\{Z\leq\frac{s_m-\sum_{T=t}^{t+1}\sum_{k=1}^{K}\lambda_k v_{mk}^T+(1+\varphi_m)v_{mo}^s}{\sigma_m(\varphi_o,\lambda)}\right\}=\alpha\ .
$$

This leads to $\Phi\left\{\dfrac{s_m-\sum_{T=t}^{t+1}\sum_{k=1}^{K}\lambda_k v_{mk}^T+(1+\varphi_m)v_{mo}^s}{\sigma_m(\varphi_o,\lambda)}\right\}=\alpha,$

$$\Pr\left\{\frac{\sum_{T=t}^{t+1}\sum_{k=1}^{K}\lambda_k\tilde{v}_{mk}^{T}-(1+\varphi_m)\tilde{v}_{mo}^{s}-\sum_{T=t}^{t+1}\sum_{k=1}^{K}\lambda_k v_{mk}^{T}+(1+\varphi_m)v_{mo}^{s}}{\sigma_m(\varphi_o,\lambda)}\le\frac{s_m-\sum_{T=t}^{t+1}\sum_{k=1}^{K}\lambda_k v_{mk}^{T}+(1+\varphi_m)v_{mo}^{s}}{\sigma_m(\varphi_o,\lambda)}\right\}=\alpha,$$

Box I

$$\forall n:\ (\omega_n^s)^2=\begin{cases}\sum_{\substack{k=1\\k\neq o}}^{K}((\lambda_k+\mu_k)^2 Var(\tilde{x}_{nk}^{T}))+((\lambda_o+\mu_o))-(1-\theta_o))^2 Var(\tilde{x}_{no}^{s}), & T=s\\ \sum_{k=1}^{K}((\lambda_k+\mu_k)^2 Var(\tilde{x}_{nk}^{T}))+(1-\theta_o)^2 Var(\tilde{x}_{no}^{s}), & T\neq s\end{cases}$$

$$\forall m:(\omega_m^s)^2=\begin{cases}\sum_{\substack{k=1\\k\neq o}}^{K}((\lambda_k)^2 Var(\tilde{v}_{mk}^{T}))+(\lambda_o-(1+\varphi_o))^2 Var(\tilde{v}_{mo}^{s}), & T=s\\ \sum_{k=1}^{K}((\lambda_k)^2 Var(\tilde{v}_{mk}^{T}))+(1+\varphi_o)^2 Var(\tilde{v}_{mo}^{s}), & T\neq s\end{cases}$$

Box II

where Φ represents the normal cumulative distribution function. By considering the inverse, we have:

$$(1+\varphi_m)v_{mo}^{s}-\sum_{T=t}^{t+1}\sum_{k=1}^{K}\lambda_k v_{mk}^{T}+s_m-\Phi^{-1}(\alpha)\sigma_m(\varphi_o,\lambda)=0\quad(m=1,\ldots,M),$$

or equivalently

$$\sum_{T=t}^{t+1}\sum_{k=1}^{K}\lambda_k v_{mk}^{T}+\Phi^{-1}(\alpha)\sigma_m(\varphi_o,\lambda)\ge(1+\varphi_m)v_{mo}^{s}\quad(m=1,\ldots,M).$$

For calculating $\sigma_m(\varphi_o,\lambda)$, note that:

$$(\sigma_m(\varphi_o,\lambda))^2=Var\left(\sum_{T=t}^{t+1}\sum_{k=1}^{K}\lambda_k\tilde{v}_{mk}^{T}-(1+\varphi_m)\tilde{v}_{mo}^{s}\right)$$

$$=Var\left(\sum_{T=t}^{t+1}\sum_{\substack{k=1\\k\neq o}}^{K}(\lambda_k v_{mk}^{T})+((\lambda_o)-(1+\varphi_m)(v_{mo}^{s}))\right)$$

$$=Var\left(\sum_{T=t}^{t+1}\sum_{\substack{k=1\\k\neq o}}^{K}(\lambda_k v_{mk}^{T})\right)+Var\left((\lambda_o)-(1+\varphi_m)(v_{mo}^{s})\right)$$

$$+2\operatorname{cov}\left(\sum_{T=t}^{t+1}\sum_{\substack{k=1\\k\neq o}}^{K}((\lambda_k v_{mk}^{T})),((\lambda_o)-(1+\varphi_m)(v_{mo}^{s}))\right).$$

The $\sigma_m(\varphi_o,\lambda)$ is represented by non-negative variables $(\omega_m)^s$, where $s\in\{t,t+1\}$. Using the property of normal distribution for inputs, considering non-negative variables $(\omega_n)^s$, Model (11) is finally transformed to a quadratic programming problem as follows:

$$SD^{G}(\mathbf{x}^s,\mathbf{v}^s,\mathbf{w}^s)=\max\sum_{n=1}^{N}\theta_n+\sum_{m=1}^{M}\varphi_m+\sum_{j=1}^{J}\psi_j,$$

s.t.,

$$\sum_{T=t}^{t+1}\sum_{k=1}^{K}(\lambda_k+\mu_k)x_{nk}^{T}-\Phi^{-1}(\alpha)(\omega_n)^s\le(1-\theta_n)x_{no}^{s}\quad(n=1,\ldots,N),$$

$$\sum_{T=t}^{t+1}\sum_{k=1}^{K}(\lambda_k+\mu_k)x_{nk}^{T}-\Phi^{-1}(\alpha)(\omega_n)^s\le(1-\theta_n)x_{no}^{s}\quad(n=1,\ldots,N),$$

$$\sum_{T=t}^{t+1}\sum_{k=1}^{K}\lambda_k v_{mk}^{T}+\Phi^{-1}(\alpha)(\omega_m)^s\ge(1+\varphi_m)v_{mo}^{s}\quad(m=1,\ldots,M),$$

$$\sum_{T=t}^{t+1}\sum_{k=1}^{K}\lambda_k w_{jk}^{T}=(1-\psi_j)w_{jo}^{s}\quad(j=1,\ldots,J),$$

$$\sum_{T=t}^{t+1}\sum_{k=1}^{K}(\lambda_k+\mu_k)=1,\ \lambda_k\ge0,\ \mu_k\ge0\quad(k=1,\ldots,K),$$

$$0\le\theta_n\quad(n=1,\ldots,N),$$

$$0\le\varphi_m\quad(m=1,\ldots,M),$$

$$0\le\psi_j\quad(j=1,\ldots,J),\qquad(12)$$

where $(\omega_n)^s$ and $(\omega_m)^s$ refer to the variance and covariance of inputs and good outputs, which are shown in Box II.

As mentioned before, all the variables have a normal distribution with a known mean and variance. The variances for the inputs and the desirable outputs can be estimated as follows:

$$\bar{x}_n=\frac{1}{K}\sum_{k=1}^{K}x_{nk}\quad\text{and}\quad\bar{v}_m=\frac{1}{K}\sum_{k=1}^{K}v_{mk},$$

where,

$$Var(\tilde{x}_n)=\frac{1}{K-1}\sum_{k=1}^{K}(x_{nk}-\bar{x}_n)^2,$$

and

$$Var(\tilde{v}_m)=\frac{1}{K-1}\sum_{k=1}^{K}(v_{mk}-\bar{v}_m)^2 .$$

Note that V represents the variance-covariance matrix for inputs:

$$V=\begin{bmatrix} Var(\tilde{x}_1) & Cov(\tilde{x}_1,\tilde{x}_2) & \cdots & Cov(\tilde{x}_1,\tilde{x}_N) \\ \vdots & & \ddots & \vdots \\ Cov(\tilde{x}_N,\tilde{x}_1) & Cov(\tilde{x}_N,\tilde{x}_2) & \cdots & Var(\tilde{x}_N) \end{bmatrix}.$$

It is assumed that the inputs and good outputs are independent. This implies that $Cov(\tilde{x}_{nk},\tilde{x}_{no})=0$ and $Cov(\tilde{v}_{mo},\tilde{v}_{mk})=0$. Model (12) is a non-linear optimization model due to its quadratic constraints. It indicates the stochastic efficiency of DMU_o in periods t and t+1 concerning two different technologies associated with periods t and t+1. For simplicity of calculations, all inputs and outputs are assumed to be independent. Thus, the corresponding covariance in the above expressions is zero. Given Model (12), one can calculate the GMPI for an RM in the presence of stochastic data. Note that, for α=0.5, we have $\Phi^{-1}(\alpha)=0$, which is equivalent to the deterministic Model (9).

Remark. In Model (12), for $\alpha>0.5$ when $s\in\{t,t+1\}$, it is likely to obtain an unbounded objective value. Then, in two periods, the Stochastic Global Malmquist Productivity Index (SGMPI) of DMU_o is calculated under the condition $\alpha\in(0,0.5)$.

To evaluate the GMPI using Model (12) and variances, Expression (10) can be written as follows:

$$SMLP^G(\mathbf{x}^t,\mathbf{v}^t,\mathbf{w}^t,\mathbf{x}^{t+1},\mathbf{v}^{t+1},\mathbf{w}^{t+1}) = \frac{1+SD^G(\mathbf{x}^t,\mathbf{v}^t,\mathbf{w}^t)}{1+SD^G(\mathbf{x}^{t+1},\mathbf{v}^{t+1},\mathbf{w}^{t+1})} = \frac{1+SD^t(\mathbf{x}^t,\mathbf{v}^t,\mathbf{w}^t)}{1+SD^{t+1}(\mathbf{x}^{t+1},\mathbf{v}^{t+1},\mathbf{w}^{t+1})} \times\left[\frac{(1+SD^G(\mathbf{x}^t,\mathbf{v}^t,\mathbf{w}^t))/(1+SD^t(\mathbf{x}^t,\mathbf{v}^t,\mathbf{w}^t))}{(1+SD^G(\mathbf{x}^{t+1},\mathbf{v}^{t+1},\mathbf{w}^{t+1}))/(1+SD^{t+1}(\mathbf{x}^{t+1},\mathbf{v}^{t+1},\mathbf{w}^{t+1}))}\right]. \quad (13)$$

where SD^G is the stochastic GMI based on the modified Russell model in the presence of stochastic data. The $SMLP^G<1$ implies the stochastic deterioration in productivity from period t to t+1. $SMLP^G>1$ indicates the stochastic progress in productivity and $SMLP^G=1$ implies no change in productivity.

Theorem 1. For $0<\alpha\leq 0.5$, the optimal objective value of Model (12) is bounded.

Proof: Note that for $0<\alpha\leq 0.5$ we have $\Phi^{-1}(\alpha)\leq 0$. Therefore, the left-hand side of the first set of constraints in Model (12) is non-negative. Thus, for all n, we have $0\leq(1-\theta_n)x_{no}^s$, which leads to $0\leq\theta_n\leq 1$, for all n. For the second set of constraints, based on $\Phi^{-1}(\alpha)\leq 0$, note that $(1+\varphi_m)v_{mo}^s\leq\sum_T\sum_k\lambda_k v_{mk}^T$. Since $\sum_k\lambda_k\leq 1$, based on the fourth constraint, we have $(1+\varphi_m)v_{mo}^s\leq\sum_T \underset{k}{Max}\{v_{mk}^T\}$. Therefore, $0\leq\varphi_m\leq\frac{\sum_T \underset{k}{Max}\{v_{mk}^T\}}{v_{mo}^s}$ which shows that for all m, φ_m is bounded. Note that in the third set of constraints we also have $0\leq\psi_j\leq 1$, for all j. These show that the objective function is bounded, even in the optimality. ■

Theorem 2. For $0<\alpha\leq 0.5$, the optimal solution of Model (12) is unique.

Proof: In Model (12), the $\sum_T\sum_k(\lambda_k+\mu_k)x_{nk}^T-\Phi^{-1}(\alpha)(\omega_n)^s+\theta_n x_{no}^s-x_{no}^s$ and $-\sum_T\sum_k\lambda_k v_{mk}^T-\Phi^{-1}(\alpha)(\omega_m)^s+\varphi_m v_{mo}^s+v_{mo}^s$ are convex functions. Also, $(\omega_n)^s$ and $(\omega_m)^s$ are the convex functions with $\Phi^{-1}(\alpha)\leq 0$ for $0<\alpha\leq 0.5$. The third and the fourth equality constraints, $\sum_T\sum_k\lambda_k w_{jk}^T+\psi_j w_{jo}^s-w_{jo}^s$ and $\sum_T\sum_k(\lambda_k+\mu_k)x_{nk}^T-1$ are the convex functions. Therefore, Model (3.2) is a convex programming problem. Thus, the theorem is proved. ■

The above theorems show that the new GMPI is well-defined and can be used for estimating the EC and productivity analysis in the presence of undesirable output and stochastic data.

4. Case study

Bahman Diesel Co. (BDC) was founded in 2003. BDC produces and assembles various kinds of motor vehicles, different types of trucks, buses, mini trucks, and long vehicles. BDC has 60% of Iran's mini truck market and is one of the biggest business partners of Isuzu Japan in the Middle East. The main customers of BDC are food companies, consumer products distributors, and fire departments.

The kitting system is a Japanese management philosophy, which has been used in many Japanese production institutes since 1970. The kitting system feeds production lines and sends parts in small groups to the production lines without any breaks, which was introduced in the Toyota Company. The kitting system consists of a series of techniques and principles of production. The kitting system can increase the competitive advantage of companies by decreasing the dissipation of resources and improving product quality and production efficiency (Jonsson et al. [77]; Hanson and Brolin [78]). Hanson and Medbo [79] designed an efficient kit preparation system and recognized important features of the kitting system.

BDC implements a Kitting Delivery System (KDS) as one of the line feeding systems. The KDS involves the gathering of all the parts needed for a particular assembly from the stockroom and issuing the kit to the manufacturing line at the right time and in the right quantity. The KDS reduces waste in production lines and increases production flexibility (Hanson and Medbo [79]).

Our proposed model is used to evaluate the efficiency of the line feeding systems. Here, the efficiency of 10 KDSs (DMUs) of BDC is assessed. The criteria for efficiency assessment are as follows:

Input 1 (x_1): The number of personnel;
Input 2 (x_2): The number of logistics' staff;
Input 3 (x_3): The number of pallets;
Good output (v_1): The number of productions;
Bad output (w_1): The number of industrial wastes.

In Figure 1, the inputs and outputs of KDSs are shown. Tables 1 and 2 report the dataset of 2014 and 2016, respectively.

Using Model (9) and Eq. (10), the GMPI for the deterministic data is calculated, which is reported in the last column of Table 3. The progress and regress of KDSs are

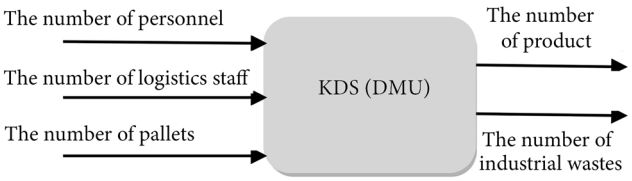

Figure 1. The inputs and outputs.

calculated from 2014 to 2016. The covariance is assumed to be zero. Table 3 reports the GMPI for deterministic and stochastic data. The comparison is depicted in Table 3.

To analyze the sensitivity of the results, different values of α are considered, which are the acceptable percentage of unsatisfied constraints of Model (12). For instance, the computed efficiency scores for Trim line N75 series and $\alpha = 0.05$ are as follows:

$MRMS^{t}(\boldsymbol{x}^{t}, \boldsymbol{v}^{t}, \boldsymbol{w}^{t}) = 0.8533301,$

$MRMS^{t+1}(\boldsymbol{x}^{t+1}, \boldsymbol{v}^{t+1}, \boldsymbol{w}^{t+1}) = 0.902752,$

$MRMS^{G}(\boldsymbol{x}^{t}, \boldsymbol{v}^{t}, \boldsymbol{w}^{t}) = 0.6068276,$

and $MRMS^{G}(\boldsymbol{x}^{t+1}, \boldsymbol{v}^{t+1}, \boldsymbol{w}^{t+1}) = 0.1010444.$

Therefore, by solving Eq. (13),

$$MRMS^{t,t+1}(\boldsymbol{x}^{t}, \boldsymbol{v}^{t}, \boldsymbol{w}^{t}, \boldsymbol{x}^{t+1}, \boldsymbol{v}^{t+1}, \boldsymbol{w}^{t+1}) = 1.45936677.$$

The deterministic GMPIs are reported in the last column of Table 3. For example, the deterministic and stochastic GMPIs for all DMUs, except for Trim line N55 and Chassis line N55 series, indicate progress given the acceptable risk level of $\alpha \in [0.001, 0.04]$. Based on the stochastic GMPIs, for many levels, the Chassis line 77E series has experienced progress as its stochastic GMPIs are more than 1. However, the GMPI for deterministic data is less than 1. SHILLER5 line, for $\alpha \in [0.001, 0.1]$, has progressed.

Trim line N75, Chassis line N75 series, and MB Series line have progressed during 2014 and 2016. However, the MB Series line, for $\alpha = 0.1$ is unbounded. Compared with the deterministic GMPIs, their stochastic GMPIs are strictly more than 1. Trim line N55 and Chassis line N55 have regressed in terms of deterministic and stochastic GMPIs.

Chassis line 77E series remains almost unchanged for the risk levels $\alpha = 0.03$ and 0.4. Given Tables 1 and 2, the desirable and undesirable outputs of the Chassis line 77E series from 2014 to 2016 have remained almost fixed. Given the deterministic data, the SHILLER5 line has progressed. Since there is no significant difference between the deterministic and stochastic MPIs during 2014 and 2016, Trim line N55 and Chassis line N55 have regressed. For instance, the deterministic GMPIs of Trim line N75, Chassis line N75 series, and MB Series line are less than one, which have regressed.

Comparing the results of deterministic and stochastic GMPIs for α=0.05 is shown in Figure 2. The stochastic GMPIs of DMU1, DMU2, DMU3, DMU4, DMU5, DMU8, and DMU9 are bigger than 1, which have progressed.

4.1. Managerial implications

Competitiveness in the global economy has been played a significant role in the market. Productivity improvement is a vital issue for firms. The use of DEA has become very crucial for industries to evaluate productivity in the presence of undesirable outputs and stochastic data. In this paper, we explained how to analyze the progress and regress of DMUs in the presence of stochastic data. To get a better idea, the sensitivity of the results given different values of α was discussed. Usually, managers can use the proposed models in the real world as they face stochastic data whenever they wish to assess the productivity of their systems.

Table 1. Data for the Year 2014.

DMUs (KDSs)	Inputs			Good output	Bad output
	x_1	x_2	x_3	v_1	w_1
Trim line N75 series	20	8	42	14	8
Chassis line N75 series	18	4	38	24	10
F SERIES line	14	4	28	6	3
MB SERIES line	18	3	48	6	1
SHILLER6 line	14	4	28	7	2
Trim line N55 series	18	7	39	24	10
Chassis line N55 series	25	7	40	12	11
Trim line 77E series	18	7	40	25	6
Chassis line 77E series	20	7	42	24	7
SHILLER5 line	14	5	27	5	2

Table 2. Data for the Year 2014.

DMUs (KDSs)	Inputs			Good output	Bad output
	x_1	x_2	x_3	v_1	w_1
Trim line N75 series	15	2	25	21	5
Chassis line N75 series	16	2	16	28	6
F Series line	12	3	16	8	2
MB Series line	16	3	30	7	0
SHILLER6 line	14	3	27	8	1
Trim line N55 series	18	5	30	26	5
Chassis line N55 series	16	6	32	17	8
Trim line 77E series	18	6	30	26	4
Chassis line 77E series	16	6	31	26	6
SHILLER5 line	14	3	24	6	1

Table 3. Comparison of stochastic GMPIs with different risk levels and deterministic GMPI.

DMUs (KDSs)	Stochastic GMPI (α=0.001)	Stochastic GMPI (α=0.01)	Stochastic GMPI (α=0.05)	Stochastic GMPI (α=0.1)	Stochastic GMPI (α=0.3)	Stochastic GMPI (α=0.4)	Determin-istic GMPI
Trim line N75 series	1.302	1.389	1.46	1.494	1.546	1.57	0.917
Chassis line N75 series	1.207	1.315	1.425	1.491	1.649	1.719	0.918
F Series line	1.083	1.224	1.373	1.466	1.744	1.811	1.021
MB Series line	1.745	1.756	1.357	Unbounded	1.31	1.576	0.904
SHILLER6 line	1.412	1.356	1.554	1.376	1.869	1.929	1.212
Trim line N55 series	0.785	0.792	0.798	0.801	0.806	0.808	0.853
Chassis line N55 series	0.858	0.86	0.862	0.863	0.864	0.865	0.764
Trim line 77E series	1.295	1.393	1.494	1.555	1.701	1.761	1.100
Chassis line 77E series	1.457	1.567	1.651	1.684	0.899	0.934	0.855
SHILLER5 line	1.353	1.456	1.495	1.638	0.842	0.849	1.044

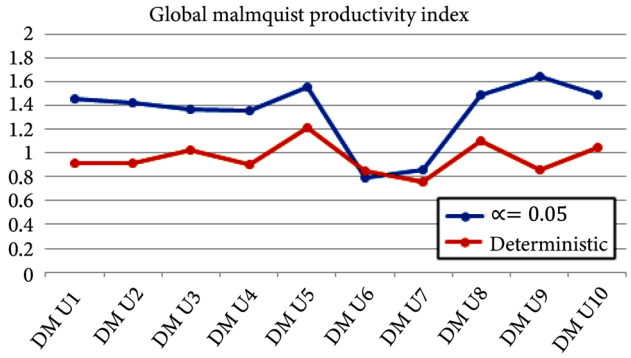

Figure 2. The deterministic and stochastic GMPI (α=0.05).

5. Conclusions

The efficiency assessment and determining the progress or regress of Decision-Making Units (DMUs) are important for decision-makers. There might be stochastic data for efficiency evaluation. In this paper, for the first time, Global Malmquist Productivity Index (GMPI) was presented to evaluate the efficiency of DMUs with stochastic data. To this end, a new Modified Russell Measure (MRM) model was developed. The novelty of the current paper lies in the analysis and study of progress and regress in efficiency analysis of the MRM model in the presence of stochastic data. Given the stochastic inputs and outputs, a new Enhanced Russell Measure (ERM) model was developed under a weak disposability assumption. The new model assumes a normal distribution of inputs and outputs. Also, a new stochastic version of Malmquist Productivity Index (MPI) was introduced for an MRM model under weak disposability assumptions. The proposed approach was then applied in Bahman Diesel Co. (BDC) for analyzing ten Kitting Delivery Systems (KDSs) during 2014 and 2016. The results showed that the developed models can be implemented in the real world.

The prospective scholars can apply the developed models in other settings such as suppliers' assessment, customers' assessment, hospitals' assessment, etc. A similar method can be repeated in the presence of both stochastic data and fuzzy data. Possible extensions of the provided stochastic GMPI in the existence of skewed and truncated normally distributed data are another interesting research topics.

Acknowledgments

The authors would like to thank three Reviewers for their useful comments. Also, the authors would like to acknowledge Mr. Nasir Naseri for providing data from Bahman Diesel Co. (BDC) and his helpful comments.

Funding

This research did not receive any specific grant from funding agencies in the public, commercial, or not-for profit sectors.

Authors contribution statement

First author: Data curation; Formal analysis; Writing-original draft preparation, including authorship of the main body of the manuscript, data preparation, code development, and preparation of the initial draft of the paper.

Second author: Resources; Writing-review and editing, including critical review and academic-level revision of the manuscript drafts; Editing; Supervision; Reviewing and case study.

Third author: Conceptualization; Supervision; Validation; Formal analysis; Writing-review and editing, including project oversight, supervision of data analysis, technical editing, finalization of the manuscript, and preparation of responses to reviewers' comments.

References

1. Charnes, A., Cooper, W.W., and Rhodes, E. "Measuring the efficiency of decision-making units", *Eur. J. Oper. Res*., **2**(6), pp. 429-444 (1978). https://doi.org/10.1016/0377-2217(78)90138-8

2. Seiford, L.M. and Thrall, R.M. "Recent developments in DEA: The mathematical programming approach to frontier analysis", *J. of Eco*., **46**(1), pp. 7-38 (1990). https://doi.org/10.1016/0304-4076(90)90045-U

3. Korhonen, P. and Luptacik, M. "Eco-efficiency analysis of power plants: An extension of data envelopment analysis", *Eur. J. Oper. Res*., **154**(2), pp. 437-446 (2004). https://doi.org/10.1016/S0377-2217(03)00180-2

4. Kazemi Matin, R., Jahanshahloo, G.R., and Vencheh, A.H. "Inefficiency evaluation with an additive DEA model under imprecise data, an application on IAUK departments", *J. of Oper. Res. Soci. of Japan*, **50**(3), pp. 163-177 (2007). https://doi.org/10.15807/jorsj.50.163

5. Emrouznejad, A., Parker, B., and Tavares, G. "Evaluation of research in efficiency and productivity: A survey and analysis of the first 30 years of scholarly literature in DEA", *Socio-Eco. Plan. Sci.*, **42**(5), pp.151-157 (2008). https://doi.org/10.1016/j.seps.2007.07.002

6. Hadi-Vencheh, A. and Kazemi Matin, R. "An application of IDEA to wheat farming efficiency", *Agri. Eco.*, **42**(2), pp. 487-493 (2011). https://doi.org/10.1111/j.1574-0862.2010.00528.x

7. Wang, M. and Li, Y. "Full rank of fuzzy decision-making units based on enhanced Russell measure", *Chin. J. of Manag. Sci.*, **22**(3), pp. 115-120 (2014).

8. Emrouznejad, A. and Yang, G. "A survey and analysis of the first 40 years of scholarly literature in DEA: 1978-2016", *Socio-Eco. Plan. Sci.*, **61**(4), pp. 4-8 (2018). https://doi.org/10.1016/j.seps.2017.01.008

9. Tavassoli, M., Fathi, A., and Farzipoor Saen, R. "Developing a new super-efficiency DEA model in the presence of both zero data and stochastic data: A case study in the Iranian airline industry", *Benchmarking: an International J.,* **28**(1), pp. 42-65 (2021). https://doi.org/10.1108/BIJ-01-2020-0044

10. Nemati, M., Farzipoor Saen, R., and Kazemi Matin, R. "A data envelopment analysis approach by partial impacts between inputs and desirable-undesirable outputs", *Indust. Manage. and Data Sys.*, **121**(4), pp. 809-838 (2021). https://doi.org/10.1108/IMDS-12-2019-0653

11. Hajaji, H., Yousefi, S., Farzipoor Saen, et al. "Recommending investment opportunities given congestion by adaptive network data envelopment analysis model: Assessing sustainability of supply chains", *RAIRO-Operations Res.*, **55**(1), pp. 21-49 (2021). https://doi.org/10.1051/ro/2019059

12. Yousefi, S., Shabanpour, H., and Farzipoor Saen, R. "Sustainable clustering of customers using capacitive artificial neural networks: A case study in Pegah distribution company", *RAIRO-Operations Res.*, **55**(1), pp. 51-60 (2021). https://doi.org/10.1051/ro/2020059

13. Caves, D.W., Christensen, L.R., and Diewert, W.E. "The economic theory of index numbers and the measurement of input, output and productivity", *Econometrica.*, **50**(6), pp. 1393-1414 (1982). https://doi.org/10.2307/1913388

14. Färe, R., Grosskopf, Sh., Lindgren, B., et al. "Productivity developments in Swedish hospitals: A Malmquist output index approach", *Springer*, pp. 127-190 (1994). https://doi.org/10.1007/978-94-011-0637-5-13

15. Lissitsa, A. and Odening, M. "Efficiency and total factor productivity in Ukrainian agriculture in transition", *Agri. Eco.*, **32**(3), pp. 311-325 (2005). https://doi.org/10.1111/j.1574-0862.2005.00062.x

16. Guzman, I. and Reverte, C. "Productivity and efficiency change and shareholder value: evidence from the Spanish banking sector", *Application Economics.*, **40**(15), pp. 2037–2044 (2008). https://doi.org/10.1080/00036840600949413

17. Emrouznejad, A. and Yang, G. "A framework for measuring global Malmquist–Luenberger productivity index with CO_2 emissions on Chinese manufacturing industries", *Energy.*, **115**(15), pp. 840-856 (2016a). https://doi.org/10.1016/j.energy.2016.09.032

18. Emrouznejad, A. and Yang, G. "CO_2 emissions reduction of Chinese light manufacturing industries: A novel RAM-based global Malmquist–Luenberger productivity index", *Energy Policy.*, **96**(2), pp. 397-410 (2016b). https://doi.org/10.1016/j.enpol.2016.06.023

19. Chen, S.Y. and Golley, J. "Green productivity growth in China's industry economy", *Energy Eco.*, **44**(2), pp. 89-98 (2014). https://doi.org/10.1016/j.eneco.2014.04.002

20. Luenberger, D.G. "Benefit function and duality", *J. of Math. Eco.*, **21**(5), pp. 461-481 (1992). https://doi.org/10.1016/0304-4068(92)90035-6

21. Luenberger, D.G. "New optimality principles for economic efficiency and equilibrium", *J. of Optimization Theory and Applications.*, **75**(4), pp. 211-264 (1994). https://doi.org/10.1007/BF00941466

22. Pastor, J.T. and Lovell, C.A.K. "A global Malmquist productivity index", *Economics Letters.*, **88**(2), pp. 266-271 (2005). https://doi.org/10.1016/j.econlet.2005.02.013

23. Shestalova, V. "Sequential Malmquist indices of productivity growth: An application to OECD industrial activities", *J. of Pro. Analy.*, **19**(5), pp. 211-226 (2003). https://doi.org/10.1023/A:1022857501478

24. Oh, D.H. and Heshmati, A. "A sequential Malmquist-Luenberger productivity index: Environmentally sensitive productivity growth considering the progressive nature of technology", *Energy Economics.*, **32**(6), pp. 1345-1355 (2010). https://doi.org/10.1016/j.eneco.2010.09.003

25. Oh, D.H. and Lee, J.D. "A metafrontier approach for measuring Malmquist productivity index", *Empirical Economics.*, **38**(1), pp. 46-64 (2010). https://doi.org/10.1007/s00181-009-0255-0

26. Wang, Y.M. and Lan, Y.X. "Measuring Malmquist productivity index: a new approach based on double frontiers data envelopment analysis", *Math. and Comp. Modell.*, **54**(3), pp. 2760-2771 (2011). https://doi.org/10.1016/j.mcm.2011.06.064

27. Molinos, M., Maziotis, A., and Ramón, S-G. "The Luenberger productivity indicator in the water industry: An empirical analysis for England and Wales", *Utilities Policy*, **30**(2), pp. 18-28 (2014). https://doi.org/10.1016/j.jup.2014.07.001

28. O'Donnell, C., Rao, D.S.P., and Battese, G. "Metafrontier frameworks for the study of firm-level efficiencies and technology ratios", *Empirical Economics*., **34**(2), pp. 231-255 (2008). https://doi.org/10.1007/s00181-007-0119-4

29. Portala, C.S. and Thanassoulis, E. "Economic efficiency when prices are not fixed: Disentangling quantity and price efficiency", *Omega*, **47**(C), pp. 36-44 (2014). https://doi.org/10.1016/j.omega.2014.03.005

30. Färe, R. and Grosskopf, S. "Non-parametric productivity analysis with undesirable outputs", *J. of Agri. Eco*., **85**(4), pp. 1070-1074 (2003).

31. Oh, D.H. "A global Malmquist-Luenberger productivity index", *J. of Pro. Analy*., **34**(3), pp. 183-197 (2010). https://doi.org/10.1007/s11123-010-0178-y

32. Maniadakis, N. and Thanassoulis, E. "A cost Malmquist productivity index", *Eur. J. of Ope. Res*, **154**(2), pp. 396-409 (2004). https://doi.org/10.1016/S0377-2217(03)00177-2

33. Tohidi, G., Razavyan, S., and Tohidnia, S. "A profit Malmquist productivity index", *J. of Ind. Engine. Inter*., **6**(11), pp. 23-30 (2010). https://doi.org/10.1016/j.apm.2012.02.026

34. Tohidi, G., Razavyan, S., and Tohidnia, S. "A global cost Malmquist productivity index using data envelopment analysis", *J. of the Ope. Res. Soci*., **63**(1), pp. 23-30 (2011). https://doi.org/10.1057/jors.2011.23

35. Tohidi, G. and Razavyan, S. "A circular global profit Malmquist productivity index in data envelopment analysis", *Applied Math. Modell*., **37**(1), pp. 216-227 (2013). https://doi.org/10.1016/j.apm.2012.02.026

36. Färe, R., Grosskopf, S., Lovell, C.A.K., et al. "Deviation of shadow prices for undesirable outputs: A distance function approach", *The Review of Economics and Statistics*., **75**(2), pp. 374-380 (1993). https://doi.org/10.2307/2109448

37. Arabi B., Munisamy, S., and Emrouznejad, A. "A new slacks– based measure of Malmquist– Luenberger index in the presence of undesirable outputs", *Omega*., **51**, pp. 29-37 (2015). https://doi.org/10.1016/j.omega.2014.08.006

38. Kousmanen, T. "Weak disposability in nonparametric productivity analysis with undesirable outputs", *J. of Agri. Eco*., **87**(4), pp. 1077-1082 (2005). https://doi.org/10.1111/j.1467-8276.2005.00788.x

39. Shephard, R.W. "Indirect production functions", *Math. System in Eco*., **10**, Anton Hain, Meisenheim am Glan. (1974). https://doi.org/10.1007/978-3-540-75751-1_6

40. Hailu, A. and Veeman, T. "Non-parametric productivity analysis with undesirable outputs: an application to Canadian pulp and paper industry", *J. of Agri. Eco*., **83**(3), pp. 605-616 (2001). https://doi.org/10.1111/0002-9092.00181

41. Scheel, H. "Undesirable outputs in efficiency evaluations", *Eur. J. of Oper. Res*., **132**(2), pp. 400-410 (2001). https://doi.org/10.1016/S0377-2217(00)00160-0

42. Kousmanen, T. and Podinovski, V. "Weak disposability in nonparametric productivity analysis: Reply to Färe and Grosskopf", *J. of Agri. Eco*., **91**(2), pp. 539-545 (2009). https://doi.org/10.1111/j.1467-8276.2008.01238.x

43. Azadi, M. and Farzipoor Saen, R. "Supplier selection using a new Russell model in the presence of undesirable outputs and stochastic data", *J. of App Sci*., **12**(4), pp. 336-344 (2012). https://doi.org/10.3923/jas.2012.336.344

44. Momeni, E. and Farzipoor Saen, R. "Developing a new chance-constrained data envelopment analysis in the presence of stochastic data", *Int. J. of Business Excellence*, **5**(3), pp. 169-194 (2012). https://doi.org/10.1504/IJBEX.2012.046638

45. Skevas, T., Lansink, A.O., and Stefanou, S.E. "Measuring technical efficiency in the presence of pesticide spillovers and production uncertainty: The case of Dutch arable farms", *Eur. J. of Oper. Res*., **223**(2), pp. 550-559 (2012). https://doi.org/10.1016/j.ejor.2012.06.034

46. Tavana, M., Izadikhah, M., Farzipoor Saen, R., et al. "An integrated data envelopment analysis and life cycle assessment method for performance measurement in green construction management", *Environmental Sci. and Pollution Res*., **28**(1), pp. 664-682 (2021). https://doi.org/10.1007/s11356-020-10353-7

47. Zare Haghighi, H. and Rostamy-Malkhalifeh, M. "Russell measure for modeling environmental performance", Int. *J. of DEA*., **2**(1), pp. 334-340 (2014). https://doi.org/10.1016/j.jfranklin.2011.02.005

48. Wu, J., Yao, X., and Wang, B. "Environmental efficiency evaluation of industry in China based on a new fixed undesirable output data envelopment analysis", *J. of Cleaner Prouct*., **74**(3), pp. 96-104 (2014). https://doi.org/10.1016/j.jclepro.2014.03.054

49. Jamshidi, M., Saneie, M., Mahmoodirad, A., et al. "Uncertain Russell data envelopment analysis model: A case study in Iranian banks", *J. of Intelligent and Fuzzy Sys.*, **37**(2), pp. 2937-2951 (2019). https://doi.org/10.3233/JIFS-190067

50. Cooper, W.W., Huang, Z., and Li, S.X. "Chance constrained programming approaches to technical efficiencies and inefficiencies in stochastic data envelopment analysis", *J. of Oper. Res. Soc*., **53**(12), pp.1347-1356 (2002). https://doi.org/10.1057/palgrave.jors.2601433

51. Cooper, W.W., Huang, Z., and Li, S.X. "Chance constrained programming approaches to congestion in stochastic data envelopment analysis", *Eur. J. Oper. Res*., **155**(6), pp. 487-501 (2004). https://doi.org/10.1016/S0377-2217(02)00901-3

52. Cooper, W.W., Huang, Z., Li, S.X., et al. "Efficiency aggregation with enhanced Russell measures in data envelopment analysis", *Socio-Eco. Plan. Sci*., **41**(1), pp.1-21 (2007). https://doi.org/10.1016/j.seps.2006.03.001

53. Azadi, M. and Farzipoor Saen, R. "Developing a chance-constrained free disposable hull model for selecting third-party reverse logistics providers", *Int. J. Oper. Res. and Information. Sys*., **4**(4), pp. 96-113 (2013). https://doi.org/10.4018/ijoris.2013100106

54. Azadi, M. and Farzipoor Saen, R. "Developing a new theory of integer-valued data envelopment analysis for supplier selection in the presence of stochastic data", *Int. J. of Information. Sys. and Supp. Chain Manage.*, **7**(3), pp. 80-103 (2014). https://doi.org/10.4018/ijisscm.2014070104

55. Khodabakhshi, M. "Estimating most productive scale size with stochastic data envelopment analysis", *Economic Modelling*, **26**(5), pp. 968-973 (2009). https://doi.org/10.1016/j.econmod.2009.03.002

56. Hosseinzadeh Lotfi, F., Jahanshahloo, G.R., Behzadi, M.H., et al. "Estimating stochastic Malmquist productivity index", *World App. Sci*. J., **13**(10), pp. 2178-2185 (2011).

57. Eslami, R., Khodabakhshi, M, Jahanshahloo, G.R., et al. "Estimating most productive scale size with imprecise-chance constrained input-output orientation model in data envelopment analysis", *Comp. and Indust. Engine*., **63**(1), pp. 254-261 (2012). https://doi.org/10.1016/j.cie.2012.02.009

58. Izadikhah, M., Azadi, M., Shokri Kahi, V., et al. "Developing a new chance constrained NDEA model to measure the performance of humanitarian supply chains", *Int. J. of Pro. Res*., **57**(3), pp. 662-682 (2019). https://doi.org/10.1080/00207543.2018.1480840

59. Majumder, S., Kundu, P., Kar, S., et al. "Uncertain multi-objective multi-item fixed charge solid transportation problem with budget constraint", *Soft Comp*., **23**(10), pp. 3279-3301 (2019). https://doi.org/10.1007/s00500-017-2987-7

60. Mahmoodirad, A., Dehghan, R., and Niroomand, S. "Modelling linear fractional transportation problem in belief degree-based uncertain environment", *J. of Experimental and Theoretical Intelligence.*, **31**(3), pp. 393-408 (2019). https://doi.org/10.1080/0952813X.2018.1552318

61. Hajiagha, SHR., Daneshvar, M., and Antucheviciene, J. "A hybrid fuzzy-stochastic multi-criteria ABC inventory classification using possibilistic chance-constrained programming", *Soft Computing*., **27**(6), pp. 12-20 (2020). https://doi.org/10.1007/s00500-020-05204-z

62. Sueyoshi, T. and Goto, M. "Measurement of returns to scale and damages to scale for DEA based operational and environmental assessment: How to manage desirable (good) and undesirable (bad) outputs?", *Eur. J. of Oper. Res*., **211**(1), pp 76-89 (2011). https://doi.org/10.1016/j.ejor.2010.11.013

63. Hsiao, B., Chern, C.C., and Chiu, C.R. "Performance evaluation with the entropy based weighted Russell measure in data envelopment analysis", *Expert Sys. with Applications*., **38**(8), pp. 9965-9972 (2011). https://doi.org/10.1016/j.eswa.2011.02.033

64. Lozano, S., Adenso-Díaz, B., and Barba-Gutierrez, Y. "Russell non-radial eco-efficiency measure and scale elasticity of a sample of electric/electronic products", *J. of the Franklin Institute.*, **348**(7), pp. 1605-1614 (2011). https://doi.org/10.1016/j.jfranklin.2011.02.005

65. Levkoff, S.B., Robert Russell, R., and Schworm, W. "Boundary problems with the `Russell' graph measure of technical efficiency: A refinement", *J. of Pro. Analy*., **37**(3), pp. 239-248 (2012). https://doi.org/10.1007/s11123-011-0241-3

66. Wang, Q., Zhou, P., Zhao, Z., et al. "Energy efficiency and energy saving potential in China: A directional meta-frontier DEA approach", *Sustainability*., **6**(8), pp. 5476-5492 (2014). https://doi.org/10.3390/su6085476

67. Esmaeili, M. "An enhanced Russell measure in DEA with interval data", *App. Math. and Comp*., **219**(4), pp. 1589-1593 (2012). https://doi.org/10.1016/j.amc.2012.07.060

68. Chen, P.-C., Yu, M.-M., Chang, C.-C., et al. "Non-radial directional performance measurement with

undesirable outputs", Working Paper, Tohoku University (2011). https://doi.org/10.1142/S0219622015500091

69. Chen, P.-C., Yu, M.-M., Chang, C.C., et al. "Nonradial directional performance measurement with undesirable outputs: an application to OECD and non-OECD countries", *Int. J. of Information Tech. and DMU*., **14**(3), pp. 481-520 (2015). https://doi.org/10.1142/S0219622015500091

70. Yao, X., Chengwen, G., Shuai, S., et al. "Total-factor CO2 emission performance of China's provincial industrial sector: A meta-frontier non-radial Malmquist index approach", *Applied Energy*, **184**(C), pp. 1142-1153 (2016). https://doi.org/10.1016/j.apenergy.2016.08.064

71. Aparicio, J., Crespo-Cebada, E., Pedraja-Chaparro, F., et al. "Comparing school ownership performance using a pseudo-panel database: A Malmquist-type index approach", *Eur. J. Oper. Res*., **256**(2), pp. 533-542 (2017). https://doi.org/10.1016/j.ejor.2016.06.030

72. Nakano, M. and Managi, S. "Regulatory reforms and productivity: an empirical analysis of the Japanese electricity industry", *Energy Policy*., **36**(4), pp. 201-209 (2008). https://doi.org/10.1016/j.enpol.2007.09.003

73. Sueyoshi, T. and Goto, M. "Photovoltaic power stations in Germany and the United States: a comparative study by data envelopment analysis", *Energy Economics*., **42**(C), pp. 271-288 (2014). https://doi.org/10.1016/j.eneco.2014.01.004

74. Zhang, N. and Choi, Y. "A note on the evolution of directional distance function and its development in energy and environmental studies 1997-2013", Renewable and Sustainable *Energy Reviews*., **33**(2), pp. 50-59 (2014). https://doi.org/10.1016/j.rser.2014.01.064

75. Giménez, V., Prior, D., and Thieme, C. "An international comparison of Educational systems: an application of the global Malmquist-Luenberger Index", Working Papers., Economics Department, University Jaume I, Castellon (Spain) (2014). https://doi.org/10.1007/s11123-017-0491-9

76. Chung, Y.H., Färe, R., and Grosskopf, S. "Productivity and undesirable outputs: a directional distance function approach", *J. of Enviro. Manage*., **51**(3), pp. 229-240 (1997). https://doi.org/10.1006/jema.1997.0146

77. Jonsson, D., Medbo, L., and Engström, T. "Some considerations relating to the reintroduction of assembly lines in the Swedish automotive industry", *Int J. of Oper. and Product. Manage*., **24**(8), pp. 754-772 (2004). https://doi.org/10.1108/01443570410548202

78. Hanson, R. and A. Brolin. "A comparison of kitting and continuous supply in in-plant materials supply", *Int. J. of Pro. Res*.,**51**(4), pp. 979-992 (2013). https://doi.org/10.1080/00207543.2012.657806

79. Hanson, R. and L. Medbo. "Man-hour efficiency of manual kit preparation in the materials supply to mass-customized assembly", *Int. J. of Pro. Res*., **57**(11), pp. 3735-3747 (2019). https://doi.org/10.1080/00207543.2019.1566653

Biographies

Seyedeh Sara Hosseini holds her PhD from the Department of Mathematics at Islamic Azad University, Qazvin, Iran. Her research interests include mathematical modelling, optimization, operations research, and data envelopment analysis.

Reza Farzipoor Saen has published over 203 refereed papers in many prestigious journals. His h-indices in Google Scholar and Scopus are 40 and 36, respectively. He has 24 years of industrial and consultation experience. Reza Farzipoor Saen is on the list of top 2% of scientists in the world, ranked by Stanford University (2020-2021).

Reza Kazemi Matin is an Associate Professor in the Department of Mathematics at Sultan Qaboos University. His research interests include operations research, data envelopment analysis, mathematical and economic modelling, and applied quantitative methods, with a focus on problems in industrial mathematics and decision sciences. He has published research papers in international peer-reviewed journals such as European Journal of Operational Research, Omega, and Decision Support Systems, contributing to both theoretical developments and application-driven research in mathematics and related fields.